
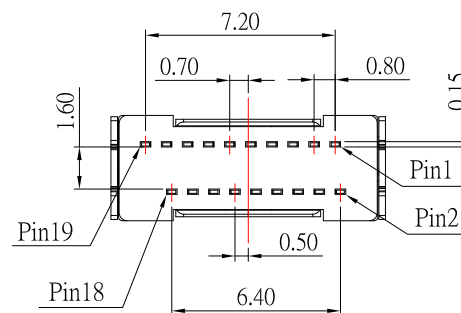
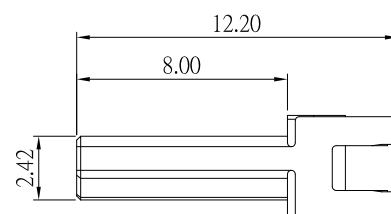
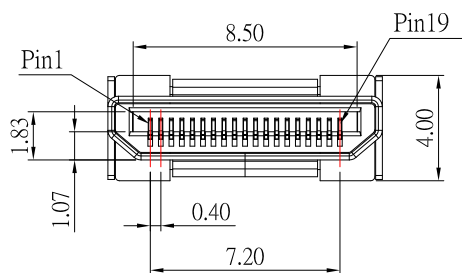
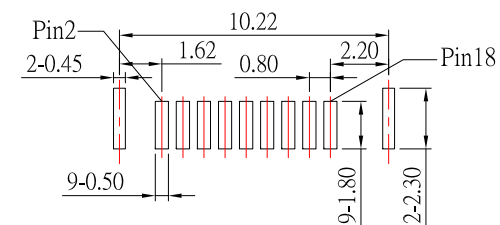
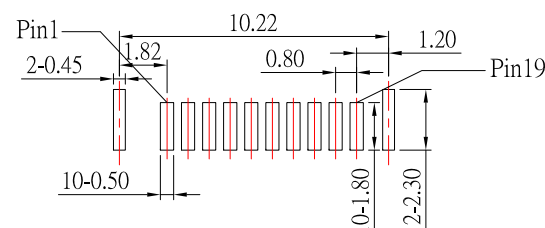


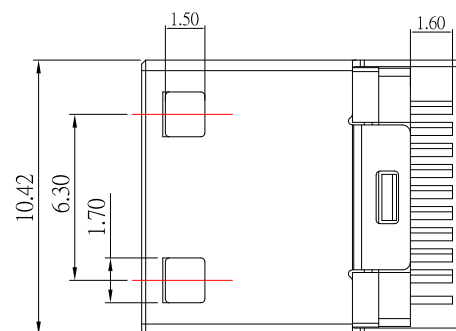

PIN	Signal Assignment
1	TMD5 Data2 Shield
2	TMD5 Data2+
3	TMD5 Data2-
4	TMD5 Data1 Shield
5	TMD5 Data1+
6	TMD5 Data1-
7	TMD5 Data0 Shield
8	TMD5 Data0+
9	TMD5 Data0-
10	TMD5 Clock Shield
11	TMD5 Clock+
12	TMD5 Clock-
13	bDC/CEC Ground
14	CEC
15	SCL
16	SBA
17	Reserved (NC. on device)
18	+5V Power
19	Hot Plug Detect

NOTE:

1.MATERIAL:

- 1.1 HOUSING: LCP,UL94V-0 , BLACK
- 1.2 CONTACT: PHOSPHOR BRONZE
- 1.3 SHEEL: BRASS

2.PLATING :

- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
- 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

3.ELECTRICAL:

- 3.1 RATING: 40V AC , 0.5A
- 3.2 INSULATION RESISTANCE: 100MΩ MIN
- 3.3 CONTACT RESISTANCE: 50 mΩ MAX
- 3.4 WITHSTANDING VOLTAGE: 100V AC / MINUTE



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
05/05/17
DATE
05/05/17
DATE
05/05/17

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
HDMI C TYPE Male 夾板式
HDMI-C-19PL-V-S297
HDMI-C-19PL-V-S297

SIZE
A4
VER
A0