




P.C.B LAYOUT
BOTTOM VIEW

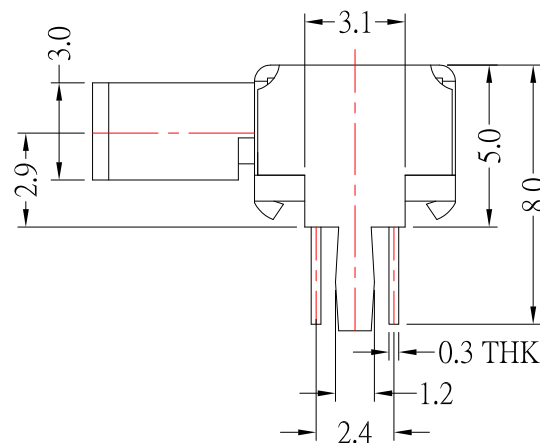

Model No.	X(mm)
SK-22D06-G2	2mm
SK-22D06-G3	3mm
SK-22D06-G4	4mm
SK-22D06-G5	5mm
SK-22D06-G6	6mm
SK-22D06-G7	7mm
SK-22D06-G8	8mm
SK-22D06-G9	9mm

SPECIFICATIONS

Rating	0.3A 50V DC
FUNCTION	2P2T
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	350gf ± 100gf
Operating Life	10,000 cycle

6	CONTACT CLIP	PBS	2	NATURAL
5	SPRING PLATE	SUS	1	NATURAL
4	TERMINAL	BRASS	6	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	KNOB	POM	1	BLACK
1	FRAME	SPCC	1	Ni PLATED
NO.	PARTS	MATERIALS	Q'TY	FINISH

DRAWN BY:	DATE	MAT'L		TITLE	SWITCH	
Jack Lu	10/22/15					
CHECKED BY:	DATE	FINISH		MODLE	SLIDE SWITCH	
Jacky Chen	10/22/15					
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	SK-22D06-Gx-S191	SIZE
		Tony Kao	10/22/15	SHEET NO.	1 of 1	PART NO.
						VER



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD.



UNITS

MM

7				
	1	新增SPEC	Jack	102215
	ITEM NO.	DESCRIPTION	DRAWN	DATE