


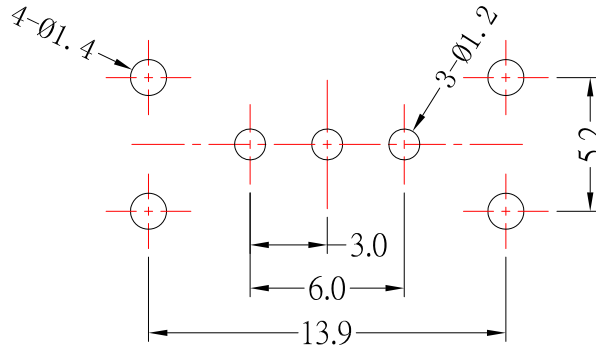
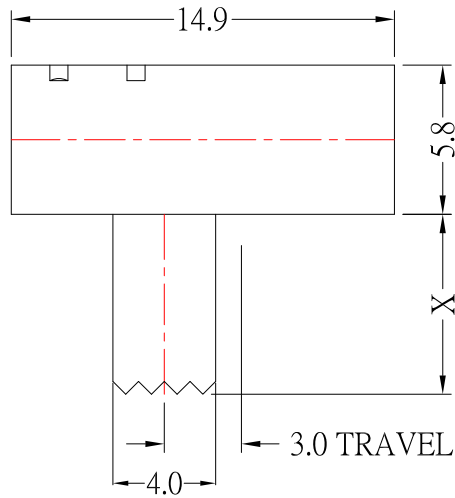




P.C.B LAYOUT
BOTTOM VIEW

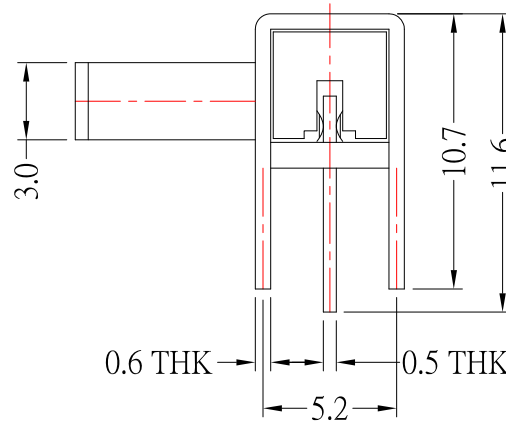

Model No.	X(mm)
SK-12F16-G2	2mm
SK-12F16-G3	3mm
SK-12F16-G4	4mm
SK-12F16-G5	5mm
SK-12F16-G6	6mm
SK-12F16-G7	7mm
SK-12F16-G8	8mm
SK-12F16-G9	9mm

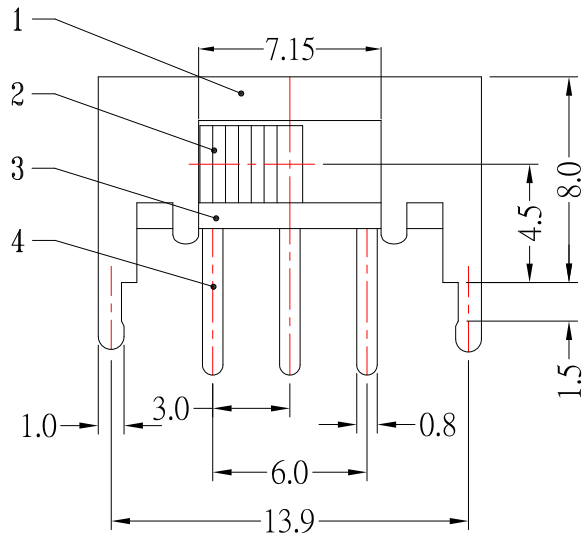

SPECIFICATIONS

Rating	DC 50V 0.3A
Circuit	1P - 2T
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	300gf ±100gf
Operating Life (cycles)	10,000

7	STEEL BALL	1	STEEL	Natural
6	SPRING	1	STEEL WIRE	Ni-Plated
5	CONTACT CLIP	1	PBS	Ag-Plated
4	TERMINAL	3	BRASS	Ag-Plated over Ni Plated
3	BASE	1	PHENOLIC RESIN	Natural
2	KNOB	1	POM	Black
1	FRAME	1	SPCC	Ni-Plated
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 03/18/15
DATE: 03/18/15
DATE: 03/18/15

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE: SWITCH
MODLE: SLIDE SWITCH
DWG NO. SK-12F16-Gx-S191
PART NO. SK-12F16-Gx-S191

SIZE: A4
VER: A0

ITEM NO.	DESCRIPTION	DRAWN	DATE
5	更新為A0版	Jack	031815
4	更新材質	Jack	120914
3	更新SPRING鍍層	Jack	120114
2	新增SPEC	Jack	112014
1	新增PCB LAYOUT尺寸及圖面尺寸7.15	Jack	082614