


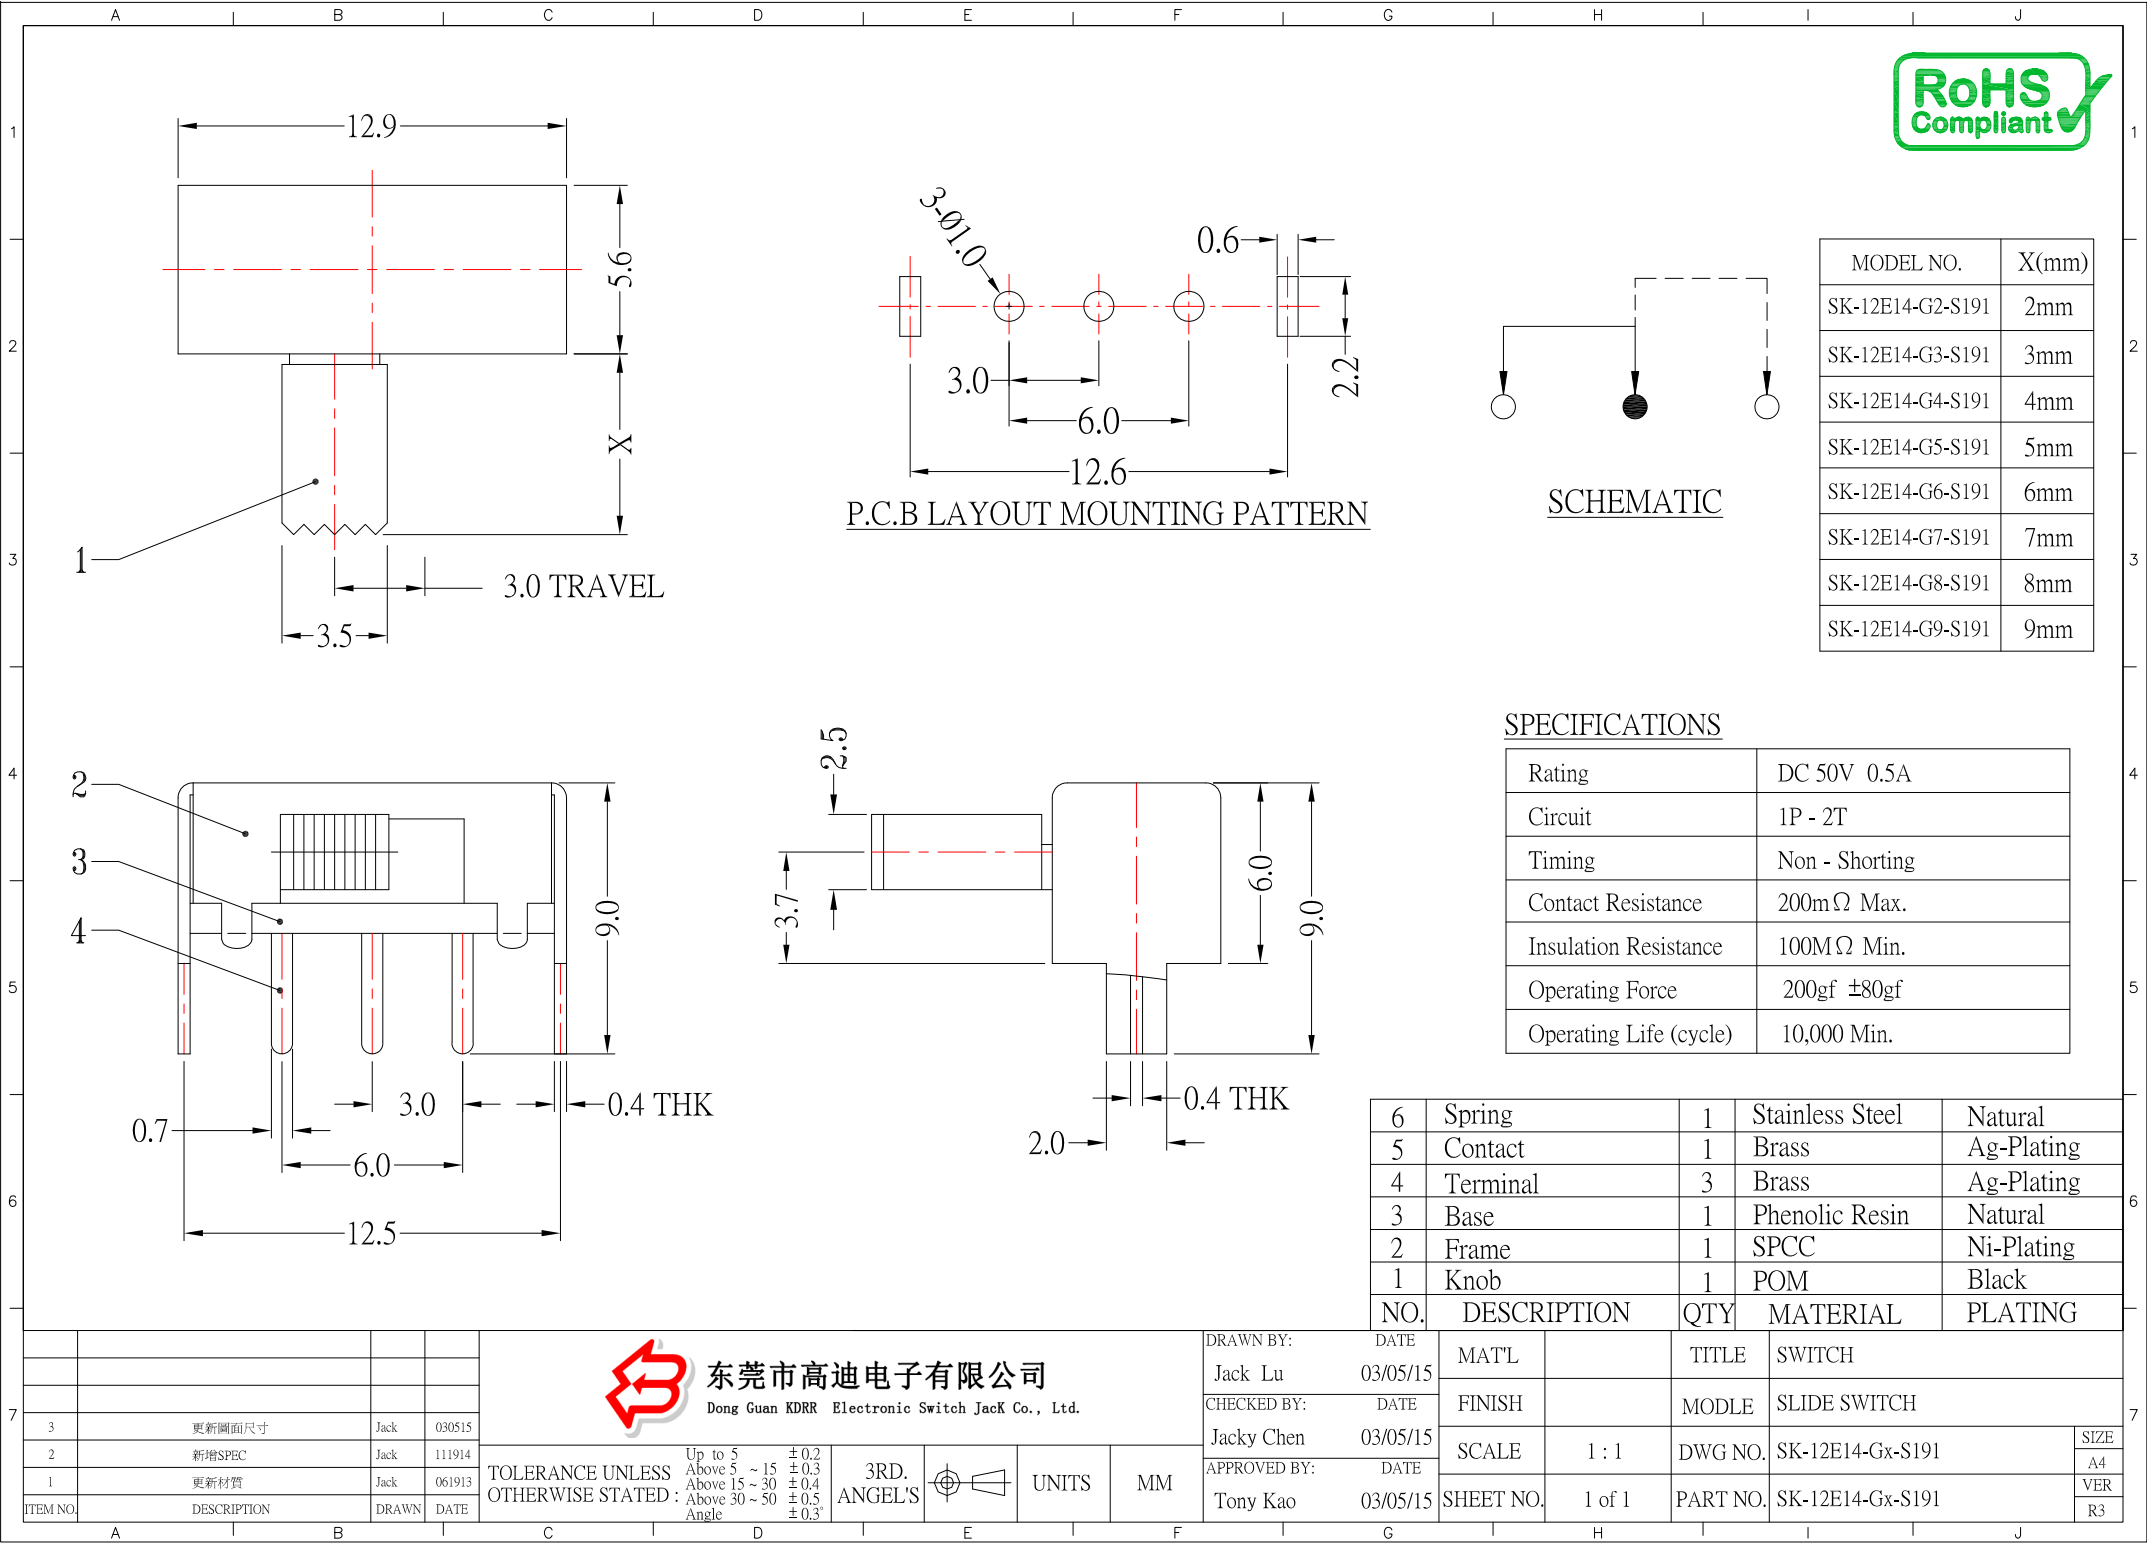

MODEL NO.	X(mm)
SK-12E14-G2-S191	2mm
SK-12E14-G3-S191	3mm
SK-12E14-G4-S191	4mm
SK-12E14-G5-S191	5mm
SK-12E14-G6-S191	6mm
SK-12E14-G7-S191	7mm
SK-12E14-G8-S191	8mm
SK-12E14-G9-S191	9mm

SPECIFICATIONS

Rating	DC 50V 0.5A
Circuit	1P - 2T
Timing	Non - Shorting
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	200gf ±80gf
Operating Life (cycle)	10,000 Min.

6	Spring	1	Stainless Steel	Natural
5	Contact	1	Brass	Ag-Plating
4	Terminal	3	Brass	Ag-Plating
3	Base	1	Phenolic Resin	Natural
2	Frame	1	SPCC	Ni-Plating
1	Knob	1	POM	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DATE	MAT'L		TITLE	SWITCH	
03/05/15	FINISH		MODLE	SLIDE SWITCH	
DATE	SCALE	1 : 1	DWG NO.	SK-12E14-Gx-S191	SIZE
03/05/15	SHEET NO.	1 of 1	PART NO.	SK-12E14-Gx-S191	A4
DATE					VER
03/05/15					R3