

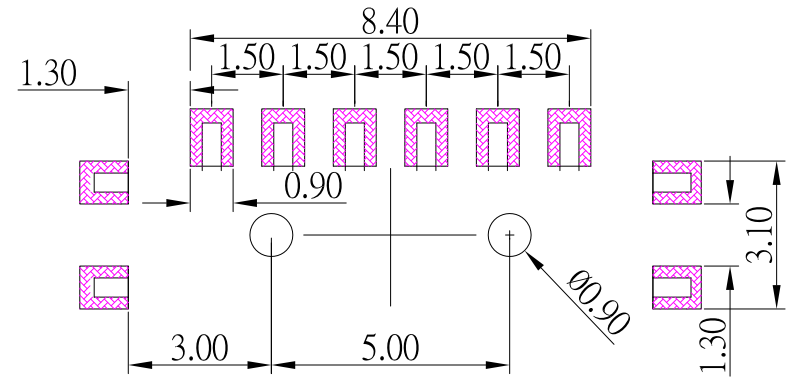
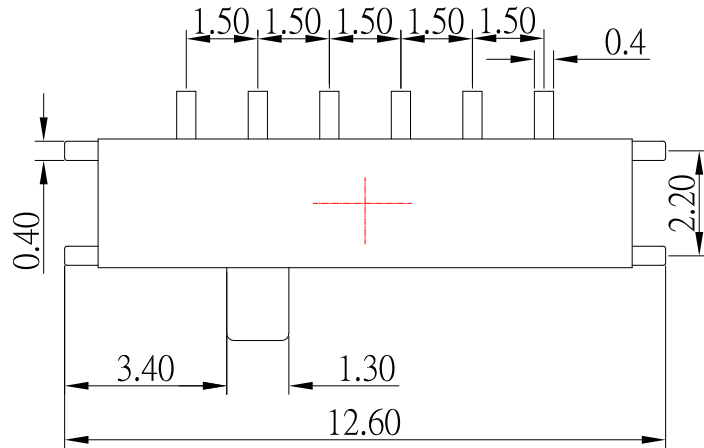


CIRCUIT DIAGRAM

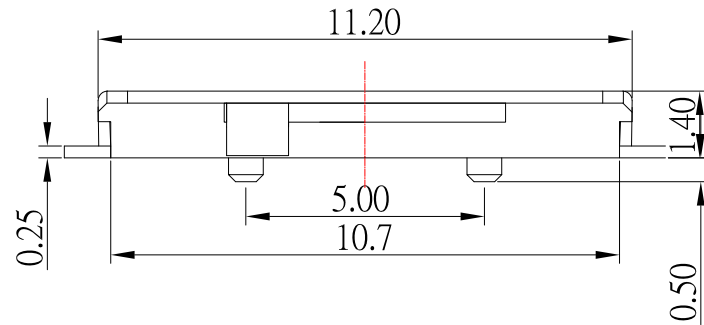

P.C.B LAND PATTERN

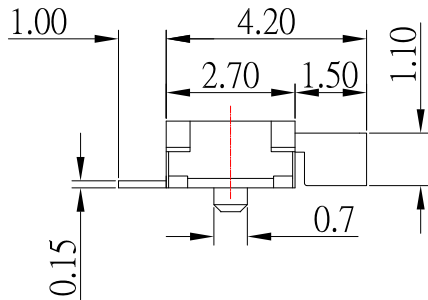

SPECIFICATIONS

Rating	0.1A 12V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	190 $\pm$ 50gf
Operating Life	10,000 cycles

E	TERMINAL	10	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	PHOSPHOR BRONZE	Ag plated
C	COVER	1	PHOSPHOR BRONZE	Ag plated
B	CASE	1	LCP	Black
A	SLIDER	1	NYLON	Black, White
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

06/10/13

MAT'L

TITLE

SWITCH

CHECKED BY:

Jacky Chen

DATE

06/10/13

FINISH

MODLE

SLIDE SWITCH

APPROVED BY:

Tony Kao

DATE

06/10/13

SCALE

1 : 1

DWG NO.

SS-K02G-S246

SIZE

A4

VER

R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------

A B C D E F G H I J