

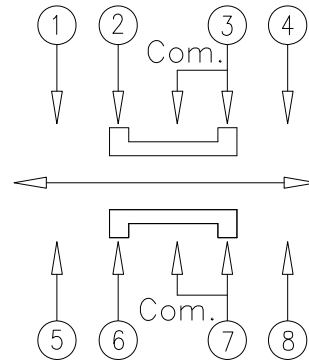


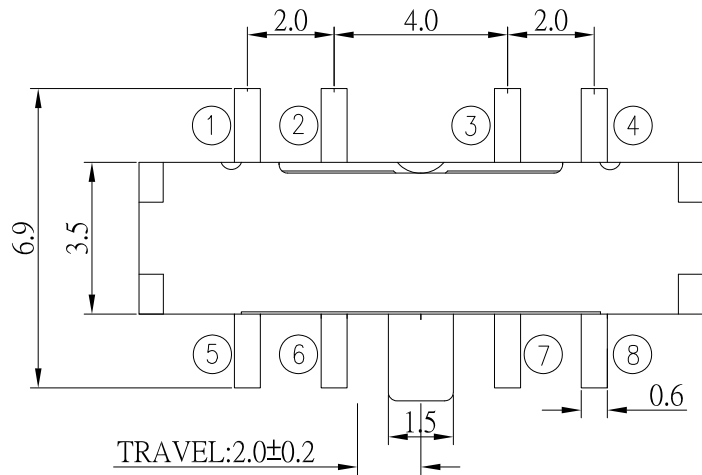

CIRCUIT DIAGRAM

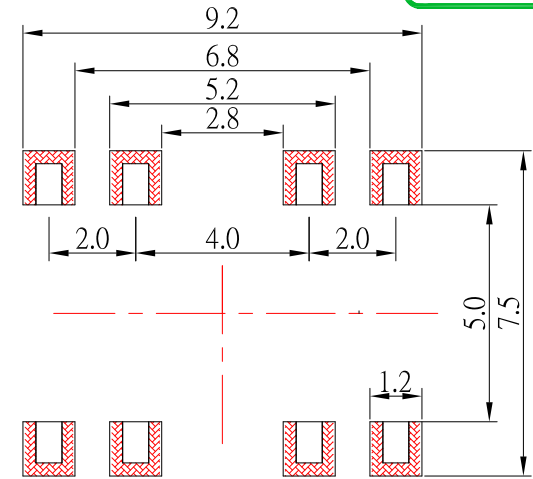

P.C.B LAND PATTERN

SS-F46S_x-x-S246



MODEL NO.	Knob(X)
SS-F46S	2.0 mm
SS-F46SA	4.0 mm

SLIDER COLOR :

Black : B
White : Blank

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	200 $\pm$ 50gf
Operating Life	10,000 cycles

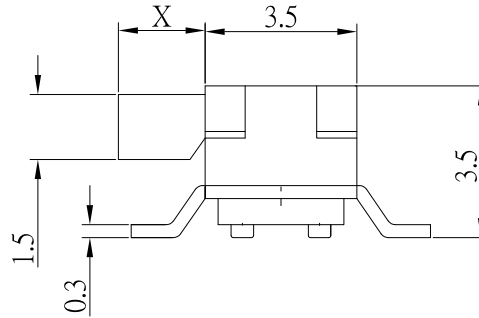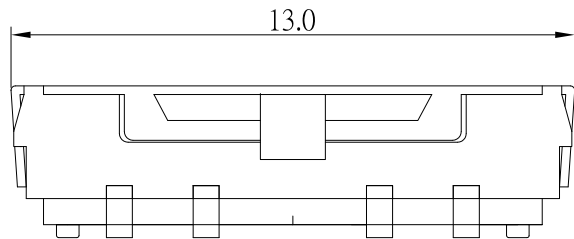

E	TERMINAL	8	PHOSPHOR BRONZE	Ag plated
D	CLIP	1	BEUC	Ag plated
C	COVER	1	SUS	
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 04/26/19

CHECKED BY: Jacky Chen
DATE: 04/26/19

APPROVED BY: Tony Kao
DATE: 04/26/19

MAT'L		TITLE	SWITCH
FINISH		MODLE	SLIDE SWICHT
SCALE	1 : 1	DWG NO.	SS-F46S _x -x-S246
SHEET NO.	1 of 1	PART NO.	SS-F46S _x -x-S246
		SIZE	A4
		VER	R3

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	新增TRAVEL	Jack	042619
2	新增高度选项及更新料號	Jack	021916
1	更新圖面	Jack	082514