
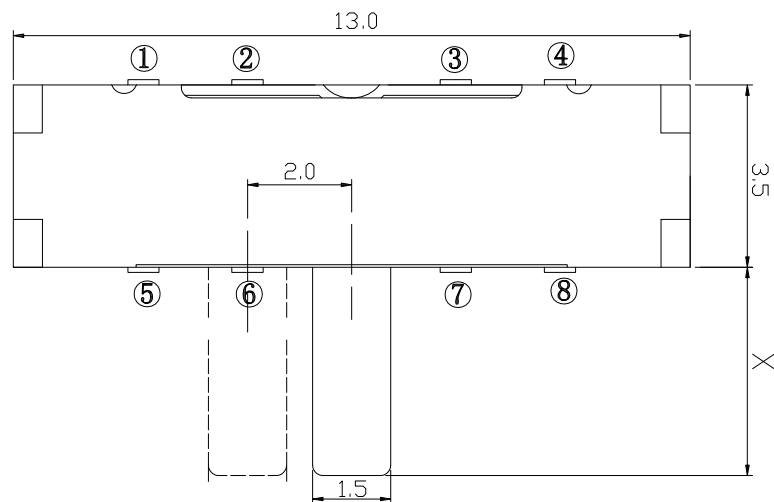


CIRCUIT DIAGRAM

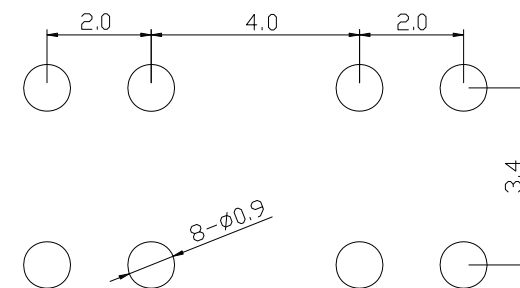



P.C.B LAND PATTERN

KNOB HEIGHT

Model	X(mm)
SS-F46-B-S246	2.0
SS-F46B-B-S246	4.0

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	230 ± 50gf
Operating Life	10,000 cycles

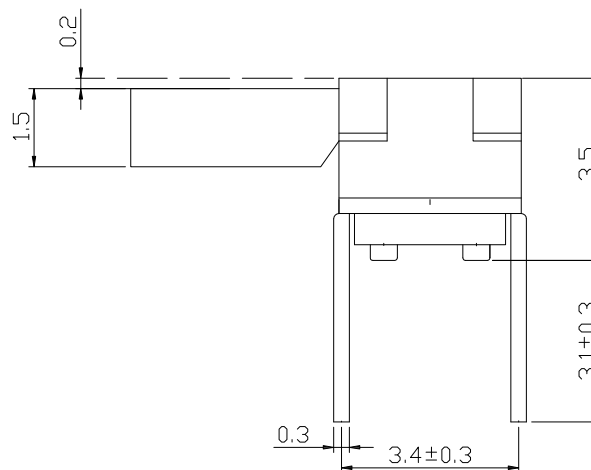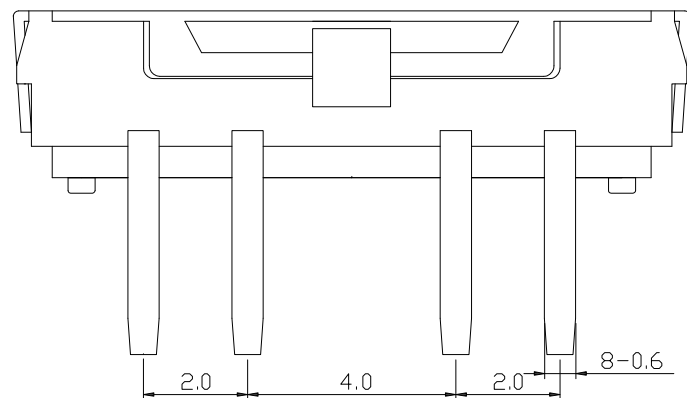

E	TERMINAL	8	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	BEUC	Ag plated
C	COVER	1	SUS	
B	CASE	1	LCP	Black
A	SLIDER	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 08/25/14

CHECKED BY: Jacky Chen
DATE: 08/25/14

APPROVED BY: Tony Kao
DATE: 08/25/14

MAT'L

TITLE SWITCH

FINISH

MODLE SLIDE SWICTH

SCALE

1 : 1

DWG NO. SS-F46x-B-S246

SIZE

A4

SHEET NO.

1 of 1

PART NO. SS-F46x-B-S246

VER

R1

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新圖面	Jack	082514