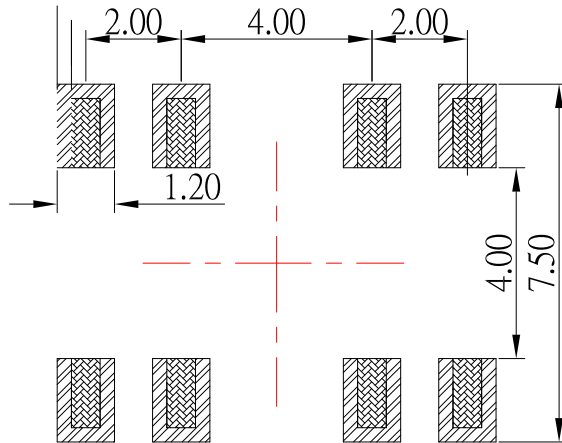
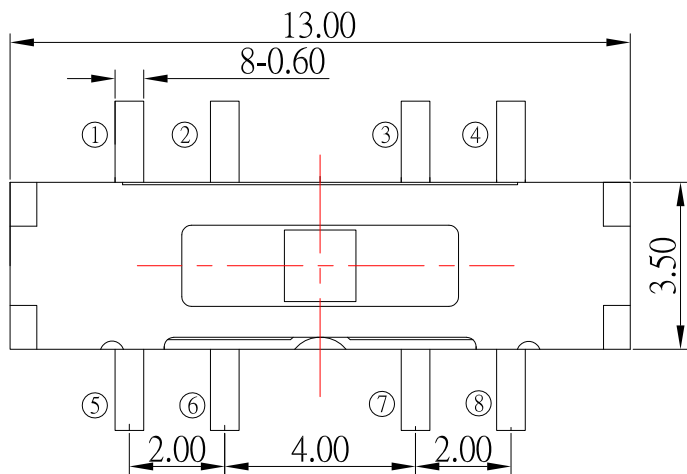


CIRCUIT DIAGRAM

P.C.B LAND PATTERN

SS-F36Sx-x-S246



MODEL NO.	KNOB(X)
SS-F36S	2.0 mm
SS-F36SA	4.0 mm

SLIDER COLOR :

Black : B
White : Blank

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	230 $\pm$ 70gf
Operating Life	10,000 cycles

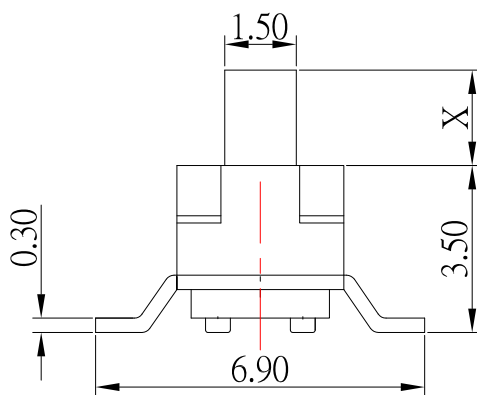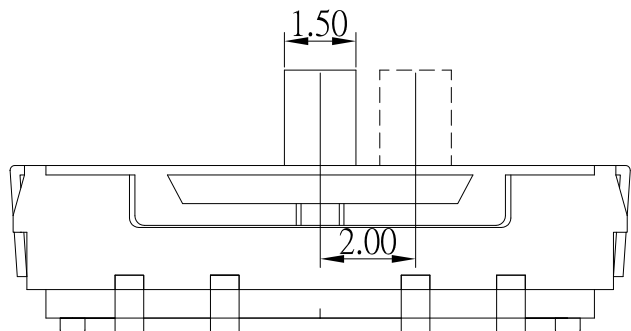

E	TERMINAL	8	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	COPPER	Ag plated
C	COVER	1	STAINLESS STEEL	
B	CASE	1	LCP	Black
A	SLIDER	1	PPA	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

4	新增SLIDER顏色選項	Jack	062315
3	更新料號及SLIDER顏色	Jack	060515
2	更新圖面位置及新增高度選項	Jack	121714
1	更新材質及SPEC	Jack	103113
ITEM NO.	DESCRIPTION	DRAWN	DATE

 东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 $\pm$ 0.2
Above 5 ~ 15 $\pm$ 0.3
Above 15 ~ 30 $\pm$ 0.4
Above 30 ~ 50 $\pm$ 0.5
Angle $\pm$ 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	06/23/15
CHECKED BY:	DATE
Jacky Chen	06/23/15
APPROVED BY:	DATE
Tony Kao	06/23/15

MAT'L	TITLE	SWITCH
FINISH	MODLE	SLIDE SWITCH
SCALE	DWG NO.	SS-F36Sx-x-S246
SHEET NO.	PART NO.	SS-F36Sx-x-S246
SIZE	A4	
VER	R4	