


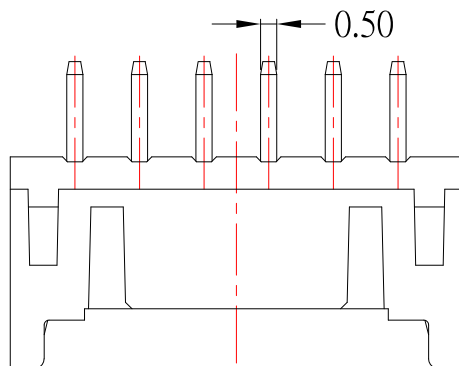


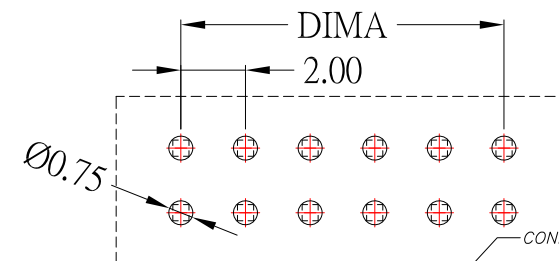

| PIN NO. | Dimensions |       |
|---------|------------|-------|
|         | A          | B     |
| 04      | 2.00       | 6.00  |
| 06      | 4.00       | 8.00  |
| 08      | 6.00       | 10.00 |
| 10      | 8.00       | 12.00 |
| 12      | 10.00      | 14.00 |
| 14      | 12.00      | 16.00 |
| 16      | 14.00      | 18.00 |
| 18      | 16.00      | 20.00 |
| 20      | 18.00      | 22.00 |
| 22      | 20.00      | 24.00 |
| 24      | 22.00      | 26.00 |
| 26      | 24.00      | 28.00 |
| 28      | 26.00      | 30.00 |
| 30      | 28.00      | 32.00 |
| 32      | 30.00      | 34.00 |
| 34      | 32.00      | 36.00 |
| 36      | 34.00      | 38.00 |
| 38      | 36.00      | 40.00 |
| 40      | 38.00      | 42.00 |

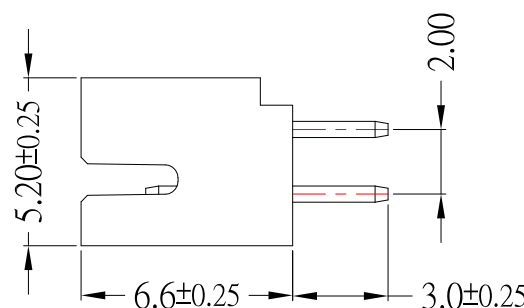

## P.C.B LAYOUT

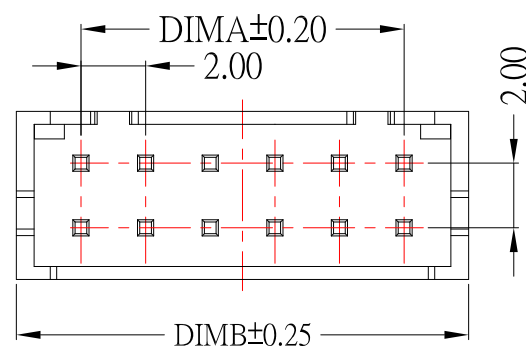

## SPECIFICATIONS

- 1.Current rating : 3.0A AC , DC
- 2.Voltage rating : 250V AC , DC
- 3.Temperature rating : -25°C ~ +85°C
- 4.Insulation resistance : 1000MΩ min.
- 5.Withstand voltage : 800V AC/minute
- 6.Contact resistance : 20mΩ/Max

## MATERIAL:

- 1.Housing : PA66
- 2.Contact : Brass , Tin plated over Nickel

 東莞市高迪電子有限公司  
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :  
Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

11/06/25

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

WAFER 2.0 DIP 180度 雙排

WF-2005CVD2Nxx-S304

WF-2005CVD2Nxx-S304

SIZE

A4

VER

R

ITEM NO. DESCRIPTION DRAWN DATE

A B C D E F G H I J