
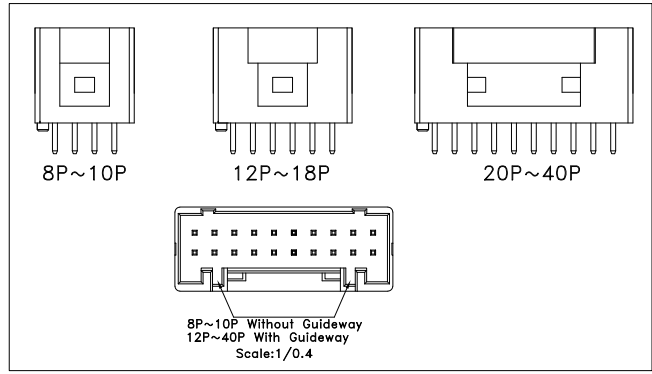
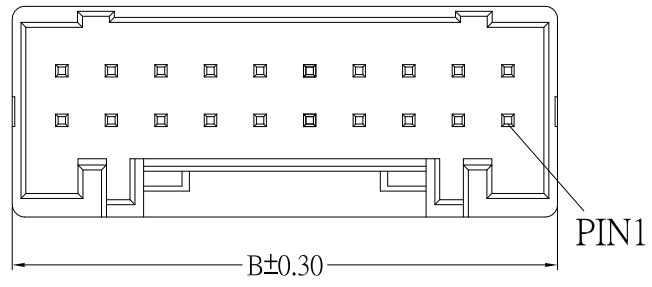
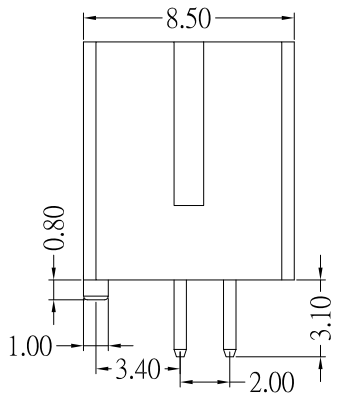


P.C.B LAYOUT

WF-2018VD2E_{xx}-S304
Double Row ——— Total PINs

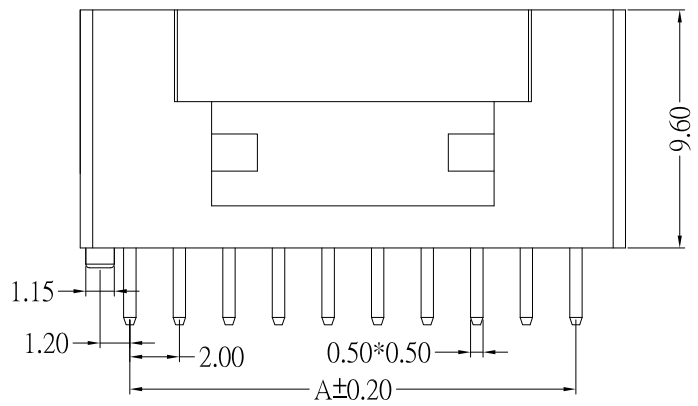

PART NO.	Dimension mm	
	A	B
08	6.00	10.00
10	8.00	12.00
12	10.00	14.00
14	12.00	16.00
16	14.00	18.00
18	16.00	20.00
20	18.00	22.00
22	20.00	24.00
24	22.00	26.00
26	24.00	28.00
28	26.00	30.00
30	28.00	32.00
32	30.00	34.00
34	32.00	36.00
36	34.00	38.00
38	36.00	40.00
40	38.00	42.00

SPECIFICATIONS

- 1.Current rating : 3.0A AC , DC
- 2.Voltage rating : 250V AC , DC
- 3.Temperature rating : -25°C ~ +85°C
- 4.Insulation resistance : 1000 MΩ min.
- 5.Withstand voltage : 800V AC/minute
- 6.Contact resistance : 10 mΩ/Max

Material:

- 1.Housing : PA66
- 2.Pin : Brass / Tin-plated

2	新增PIN1標示	Jack	102825
1	更新料號	Jack	102725
ITEM NO.	DESCRIPTION	DRAWN	DATE



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM
-------------------------------------	--	--------------	--	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	10/28/25			
CHECKED BY:	DATE	FINISH	MODLE	WAFER 2.0 DIP 180度 帶定位柱
Jacky Chen	10/28/25			
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.
Tony Kao	10/28/25	SHEET NO.	1 of 1	PART NO.
				WF-2018VD2E _{xx} -S304
				SIZE
				A4
				VER
				R2