

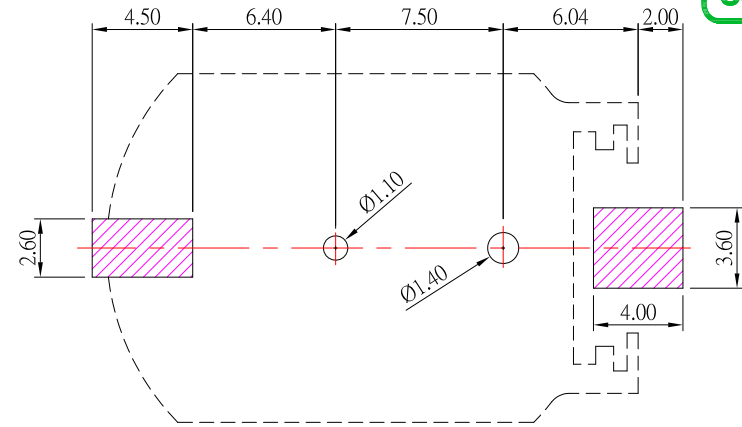
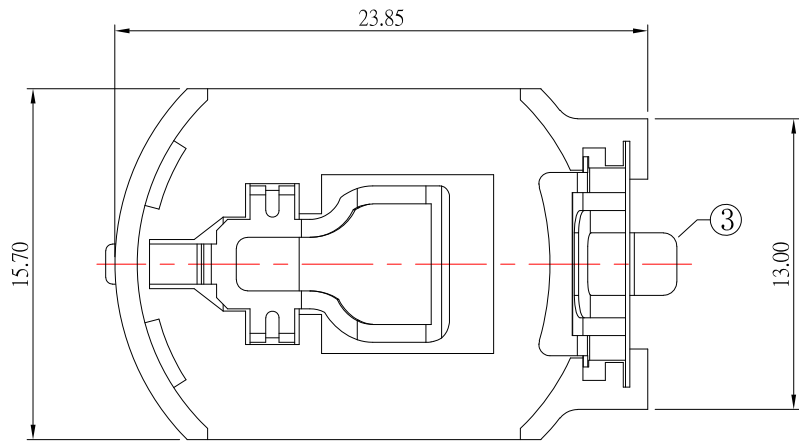
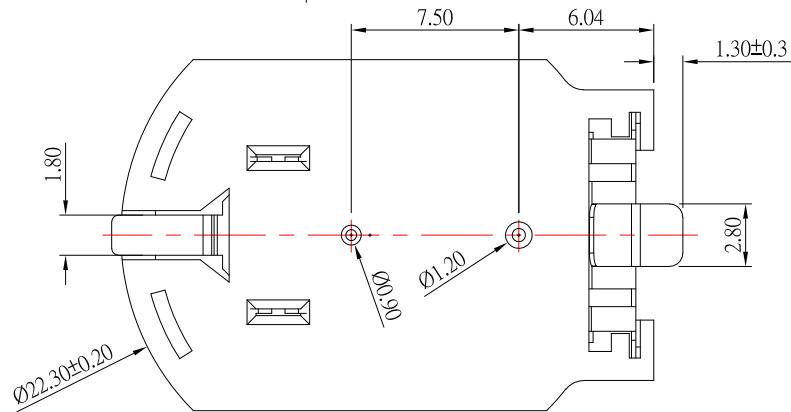


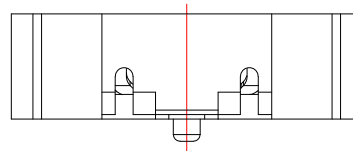

P. C. B LAYOUT
TOP VIEW

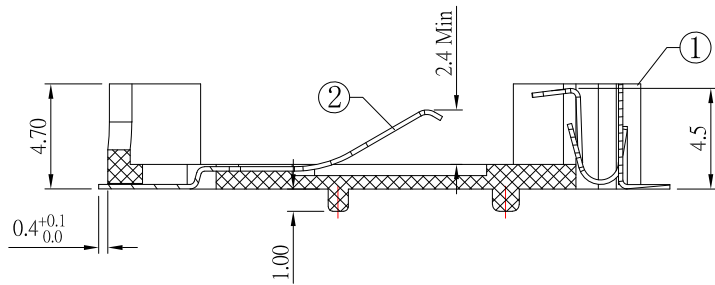

SPECIFICATION

- 1.Contact resistance: $\leq 30\text{m}\Omega$;
2. Insulation resistance: $\geq 100\text{M}\Omega$ (DC500V) ;
- 3.Withstand voltage: 500VAC.

3	CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	SPRING	1	PHOSPHOR BRONZE	Au-Plating
1	HOUSING	1	PA10T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
DRAWN BY: Jack Lu		DATE: 10/17/24	MAT'L	TITLE: CONNECTOR
CHECKED BY: Jacky Chen		DATE: 10/17/24	FINISH	MODLE: 2032 電池座
APPROVED BY: Tony Kao		DATE: 10/17/24	SCALE: 1 : 1	DWG NO. BC-203203-S124
			SHEET NO. 1 of 1	PART NO. BC-203203-S124
				SIZE: A4
				VER: R4



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3

3RD.
ANGEL'S



UNITS

MM

4	更新材質	Jack	101824
3	更新樣式	Jack	112222
2	更新圖面	Jack	070522
1	更新圖面	Jack	070122
ITEM NO.	DESCRIPTION	DRAWN	DATE