


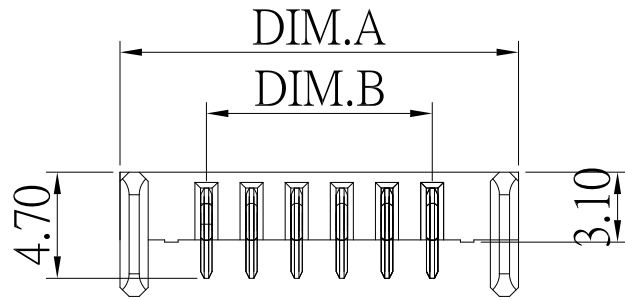


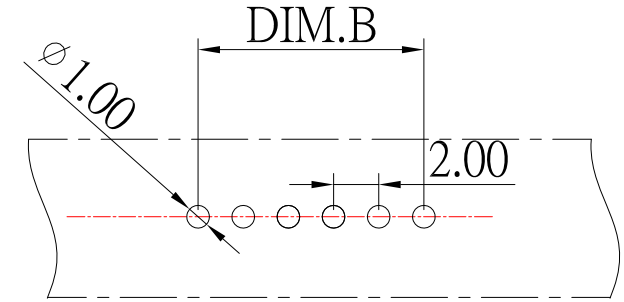

No. of Pins	Dimension		
	DIM.A	DIM.B	DIM.C
04	13.65	6.00	12.26
05	15.65	8.00	14.26
06	17.65	10.00	16.26
07	19.65	12.00	18.26
08	21.65	14.00	20.26
09	23.65	16.00	22.26
10	25.65	18.00	24.26
11	27.65	20.00	26.26
12	29.65	22.00	28.26

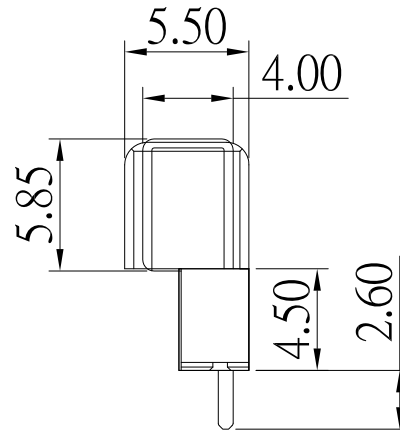

P.C.B LAYOUT

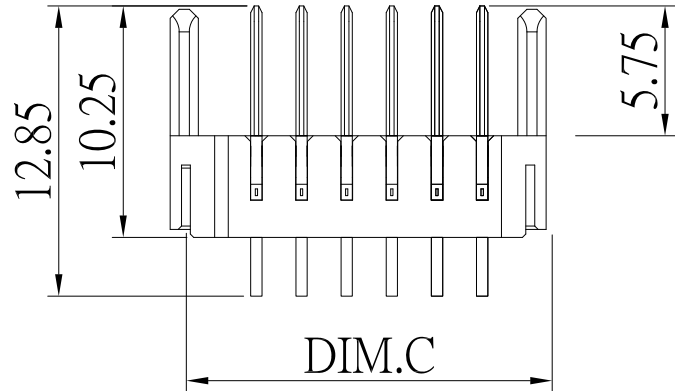

NOTE:

- MATERIAL:
 - HOUSING: PA9T
 - TERMINAL: C2680
- FINISH:
 - TERMINAL: NICKEL UNDER PLATED OVERALL, Au PLATED ON THE CONTACT AREA. OR Tin ON THE SOLDERING AREA.
- PRODUCT SPECIFICATION
 - CURRENT RATING : 5A
 - VOLTAGE RATING : 30V AC
 - DIELECTRIC WITHSTANDING VOLTAGE: 500VAC
 - INSULATION RESISTANCE: 100MΩ min.
 - CONTACT RESISTANCE: 30mΩ Max.
 - Operating Temperature: -40° ~105°

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 09/21/23
DATE: 09/21/23
DATE: 09/21/23

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	Battery 直立式 公座
SCALE	DWG NO.	BC-MVA01-xP-S410
SHEET NO.	PART NO.	BC-MVA01-xP-S410

SIZE: A4
VER: R

ITEM NO.	DESCRIPTION	DRAWN	DATE