


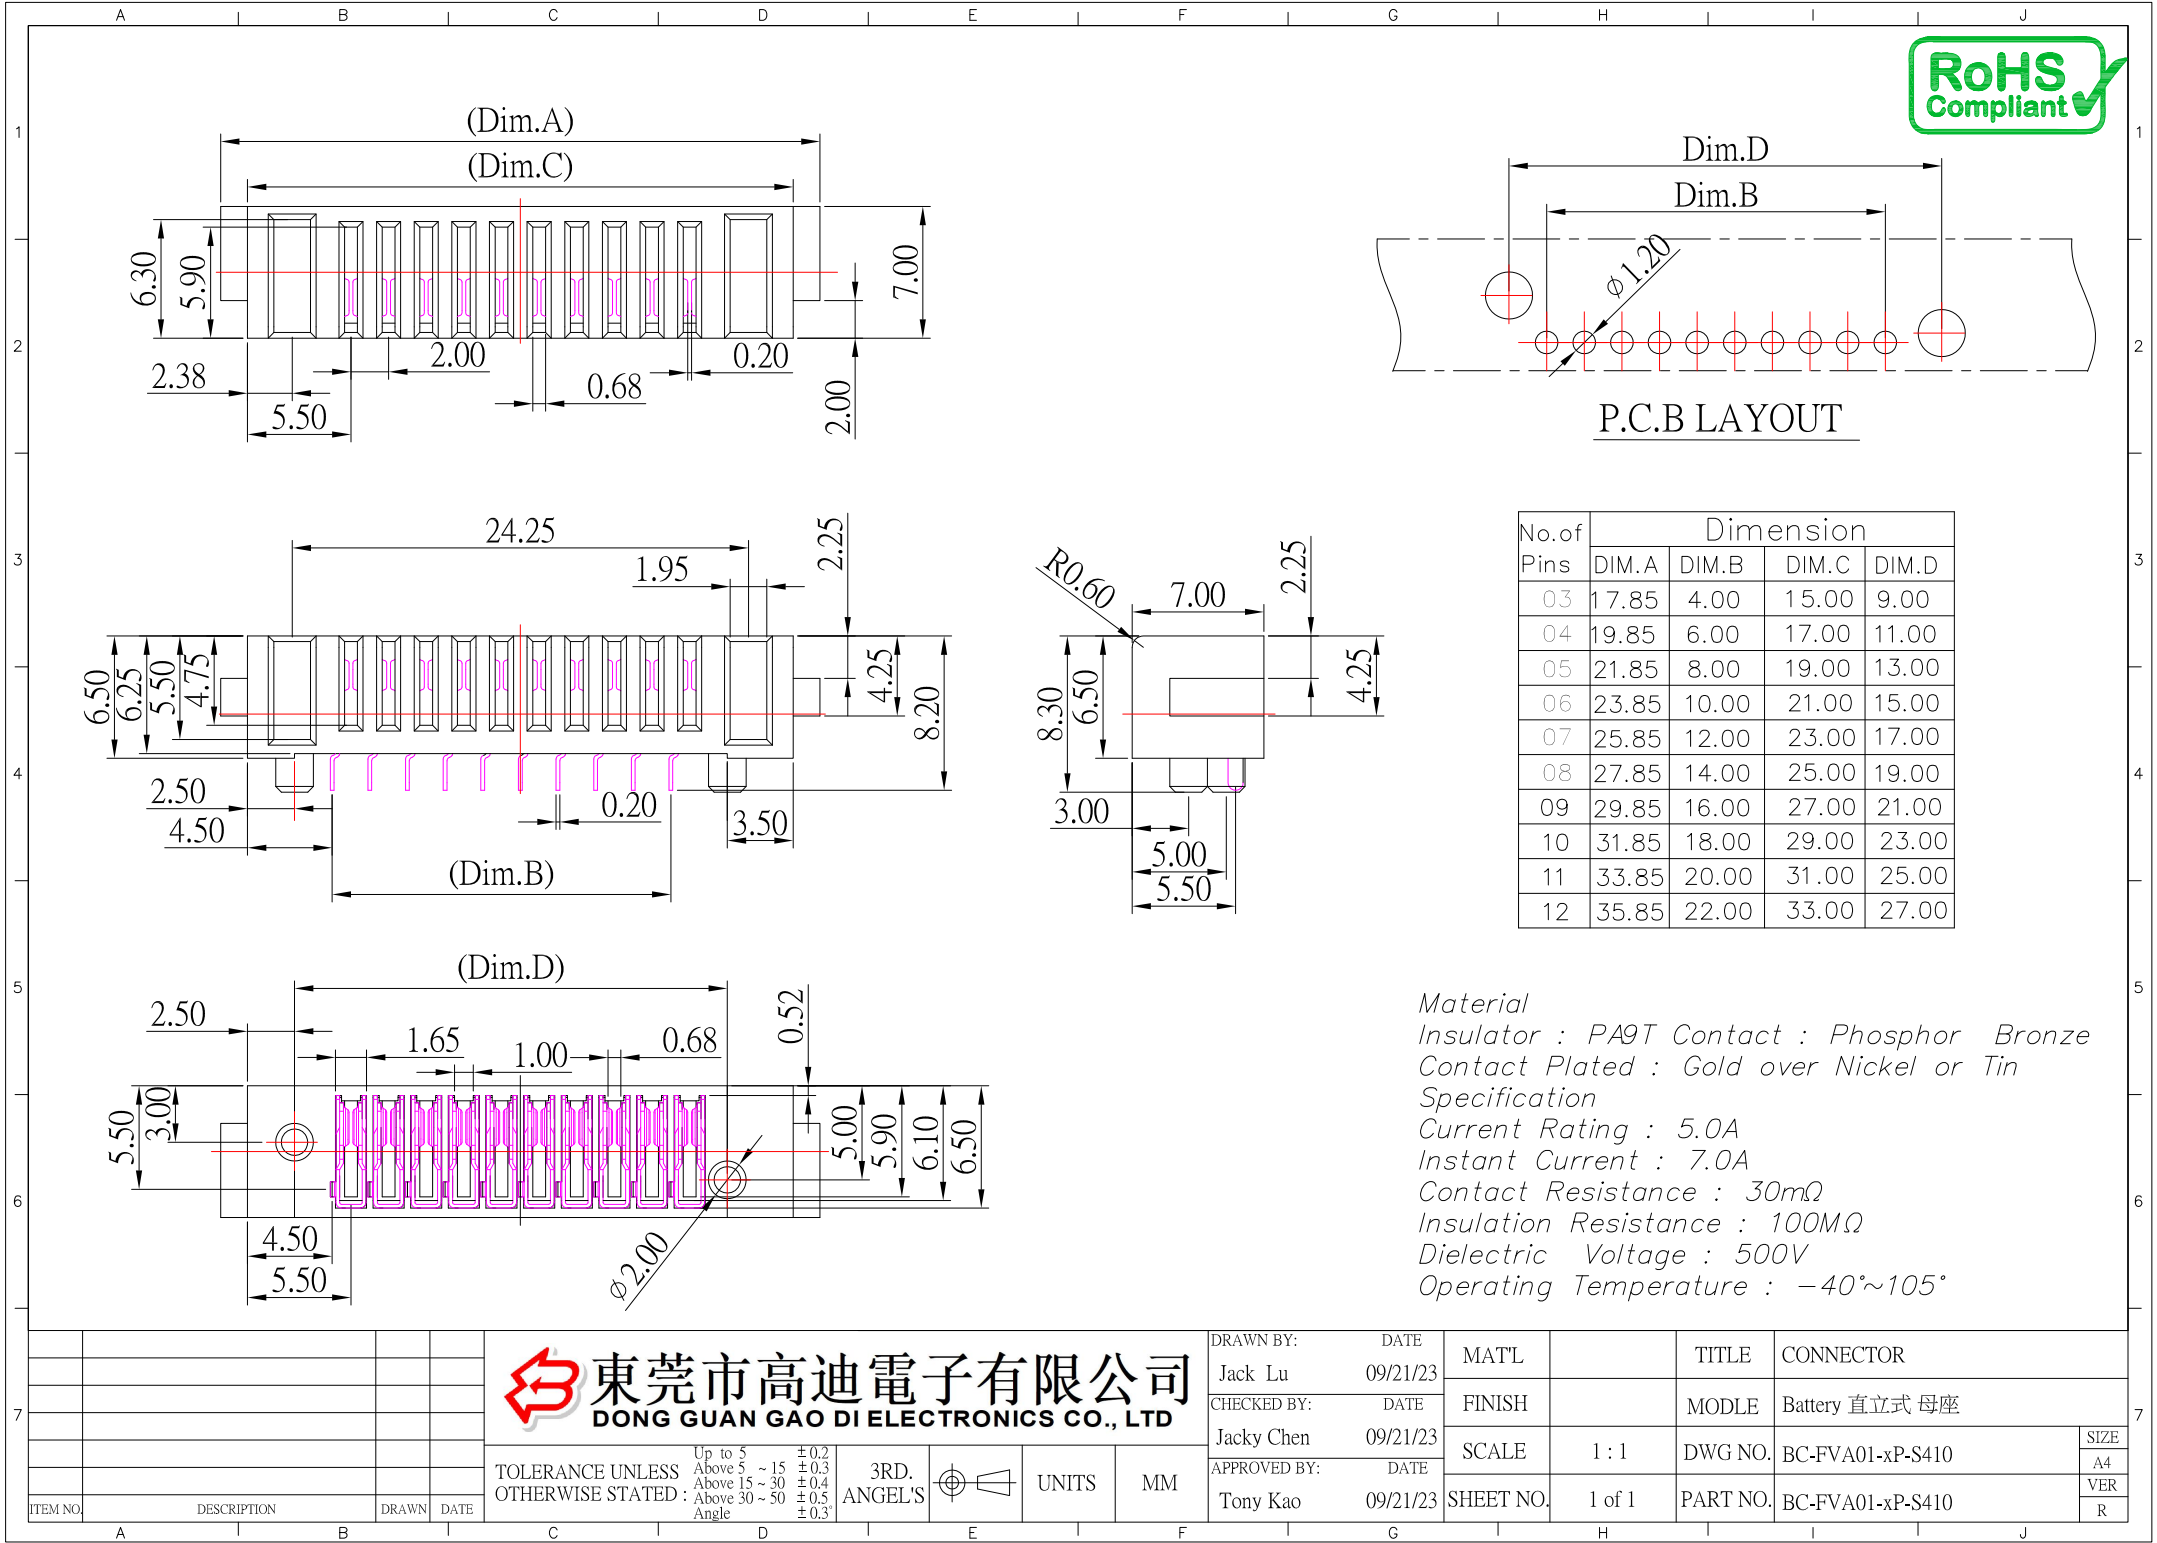

No.of Pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.D
03	17.85	4.00	15.00	9.00
04	19.85	6.00	17.00	11.00
05	21.85	8.00	19.00	13.00
06	23.85	10.00	21.00	15.00
07	25.85	12.00	23.00	17.00
08	27.85	14.00	25.00	19.00
09	29.85	16.00	27.00	21.00
10	31.85	18.00	29.00	23.00
11	33.85	20.00	31.00	25.00
12	35.85	22.00	33.00	27.00

Material
Insulator : PA9T Contact : Phosphor Bronze
Contact Plated : Gold over Nickel or Tin
Specification
Current Rating : 5.0A
Instant Current : 7.0A
Contact Resistance : 30mΩ
Insulation Resistance : 100MΩ
Dielectric Voltage : 500V
Operating Temperature : -40°~105°

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Angle	$\pm 0.3^\circ$				

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR	
Jack Lu	09/21/23					
CHECKED BY:	DATE	FINISH		MODLE	Battery 直立式 母座	
Jacky Chen	09/21/23	SCALE	1 : 1	DWG NO.	BC-FVA01-xP-S410	SIZE
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	BC-FVA01-xP-S410	A4
Tony Kao	09/21/23					VER
						R