

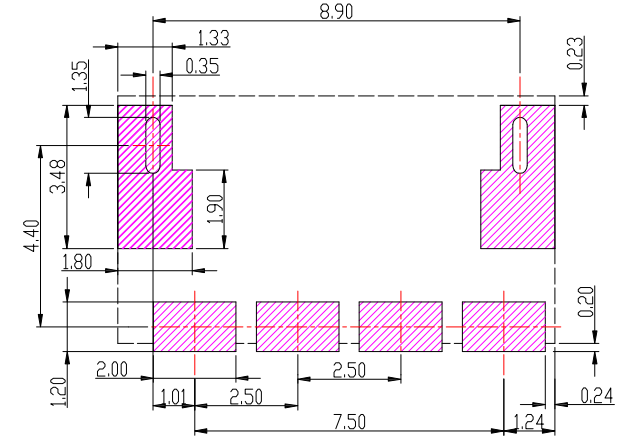
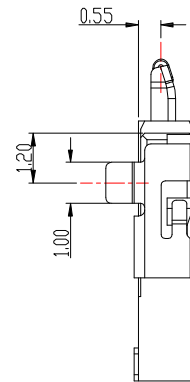
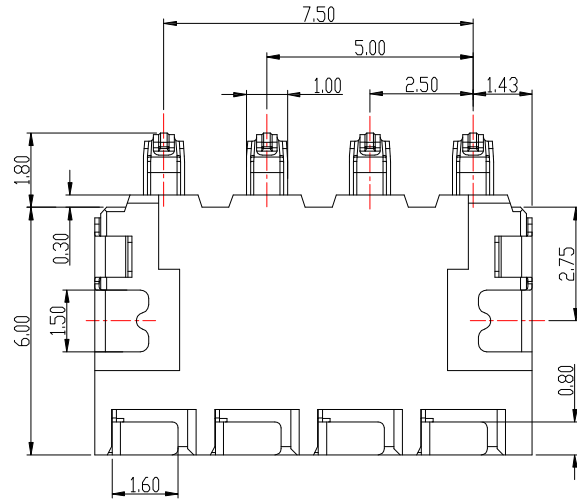


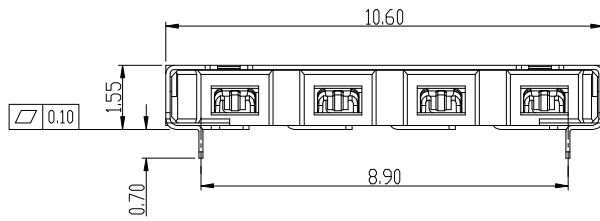

P.C.B LAYOUT

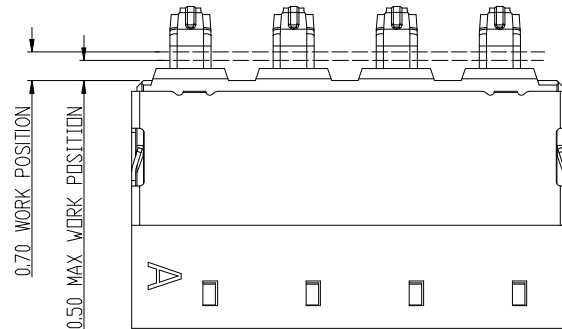

MATERIAL:

1. INSULATOR : HIGH-TEMP PLASTIC
2. CONTACT : COPPER ALLOY, GOLD PLATED OVER NICKEL
3. SHELL : SUS, NICKEL PLATED

SPECIFICATION:

1. RATING : 12V DC , 2.0A
2. CONTACT RESISTANCE : 50mΩ
3. DURABILITY: 3000 CYCLES
4. OPERATING TEMPERATURE : -30° C ~ 80° C

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	05/28/25	FINISH	MODLE	BATTERY CONNECTOR
CHECKED BY:	DATE	SCALE	DWG NO.	SIZE
Jacky Chen	05/28/25	1 : 1	BC-15G1S-04P-S486	A4
APPROVED BY:	DATE	SHEET NO.	PART NO.	VER
Tony Kao	05/28/25	1 of 1	BC-15G1S-04P-S486	R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------