

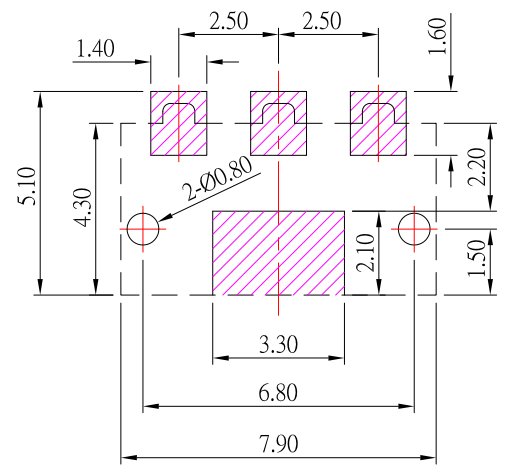
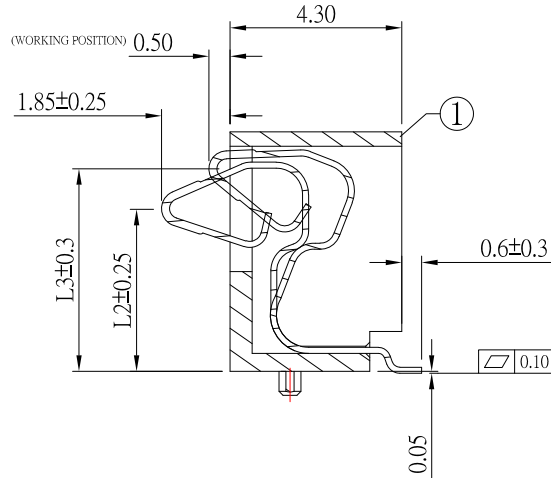


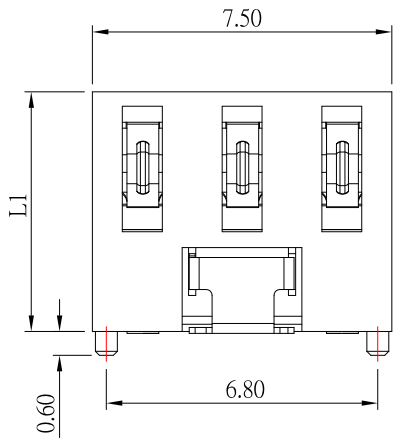

P.C.B LAYOUT
TOP VIEW

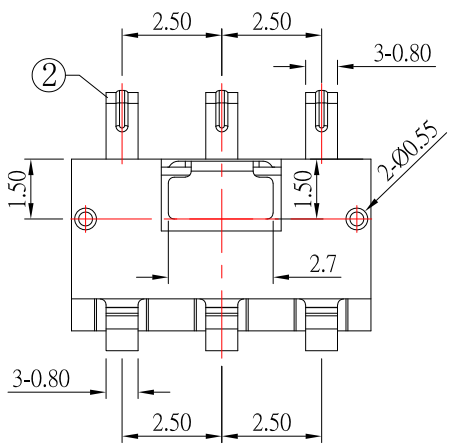

BC-S250x-03P-S124

PART NO.	L1	L2	L3
A	5.4	3.8	4.6
B	6.0	4.4	5.2
C	6.5	4.9	5.7
D	7.0	5.4	6.2
E	7.5	5.9	6.7
F	8.0	6.4	7.2

- NOTES:
- 1, Rated current: 2.0A
 - 2, Rated voltage: 12V
 - 3, Contact Resistance: 50mΩ MAX
 - 4, Insulation Resistance: 100MΩ MIN 100V DC
 - 5, Dielectric withstanding voltage: 100V AC.
 - 6, Durability: 5000 Cycles Min.
 - 7, Operating condition: Temperature: -40℃ ~ +85℃;

2	SPRING	3	PHOSPHOR BRONZE	Au-Plating
1	HOUSING	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

ITEM NO.

DESCRIPTION

DRAWN

DATE

東莞市高迪電子有限公司

DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S

UNITS

MM

DRAWN BY: Jack Lu

DATE: 05/17/24

CHECKED BY: Jacky Chen

DATE: 05/17/24

APPROVED BY: Tony Kao

DATE: 05/17/24

MAT'L

FINISH

SCALE: 1 : 1

SHEET NO. 1 of 1

TITLE: CONNECTOR

MODLE: BATTERY CONNECTOR

DWG NO. BC-S250x-03P-S124

PART NO. BC-S250x-03P-S124

SIZE: A4

VER: R