


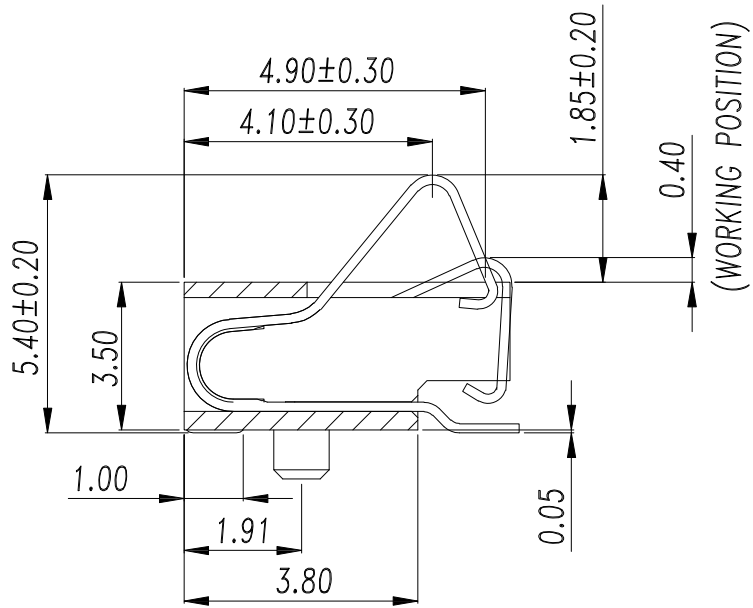


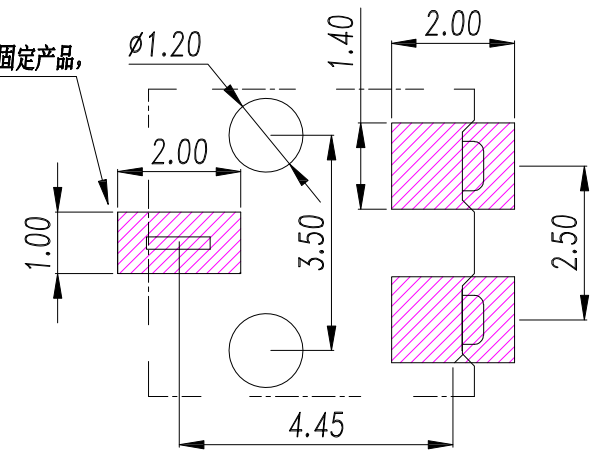

此固定片仅用于固定产品，
请勿连接电路。

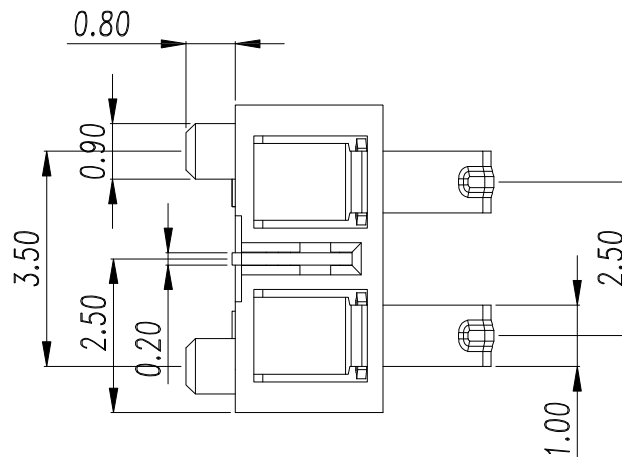

P.C.B LAYOUT

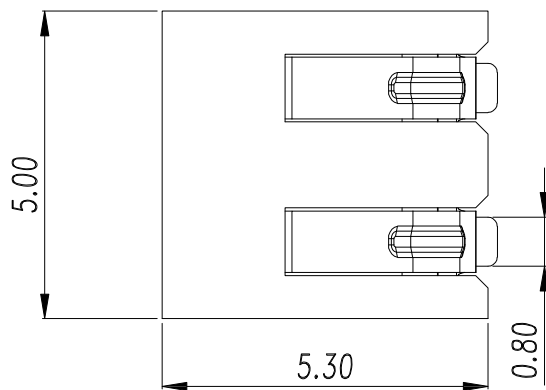

Notes:

- Material:
 - Housing : LCP, Black
 - Terminal: Copper Alloy , Gold Plated
- Technical Speciality:
 - Rating: 12V , 2.0A
 - Contact Resistance: 30mΩ Max.
 - Insulation Resistance: 500MΩ Min.
 - Dielectric Voltage: 500V
 - Operating Temperature: -40℃ ~ +85℃.



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

11/26/25

CHECKED BY:

Jacky Chen

DATE

11/26/25

APPROVED BY:

Tony Kao

DATE

11/26/25

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

BATTERY CONNECTOR

BC-BS3502A-S486

BC-BS3502A-S486

SIZE

A4

VER

R

ITEM NO.	DESCRIPTION	DRAWN	DATE