

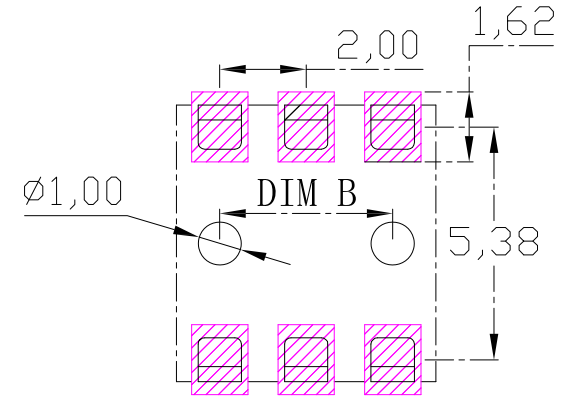
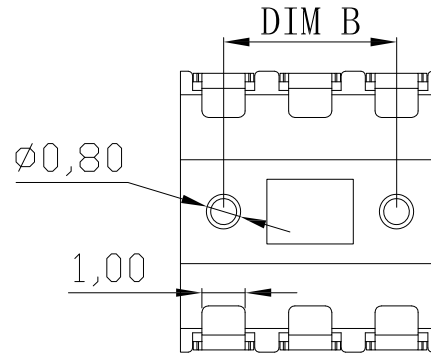
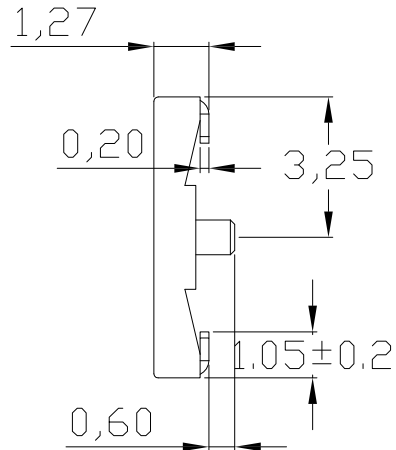


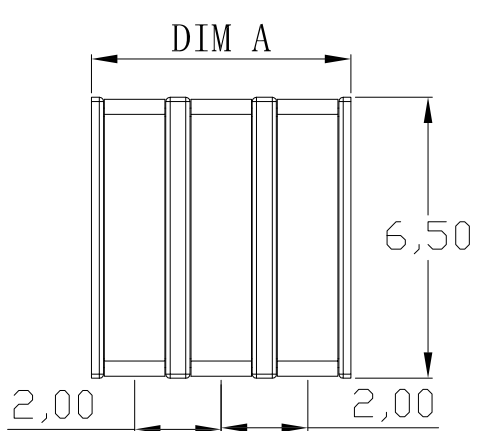

P.C.B LAYOUT

BC-20013F-G_{xx}-S410

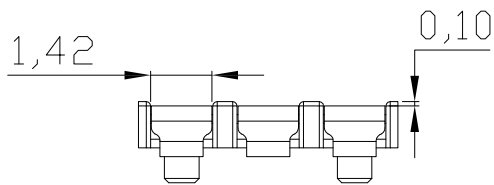

Pin 数	DIM A	DIM B
2P	4.0	2.0
3P	6.0	4.0
4P	8.0	6.0
5P	10.0	8.0
6P	12.0	10.0
7P	14.0	12.0
8P	16.0	14.0

MATERIAL:

- 1.Housing: PA9T,Black
- 2.Contact: Brass,Gold Plated

ELECTRICAL:

- 1.Rating: 30V , 5.0A
- 2.Contact Resistance: 30mΩ Max
- 3.Insulator Resistance: 500 MΩ Min
- 4.Withstanding Voltage: 500V AC
- 5.Operating Temperature: -55°C ~ 125°C



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 10/17/24
DATE: 10/17/24
DATE: 10/17/24

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE
MODE
DWG NO.
PART NO.

CONNECTOR
BATTERY CONNECTOR
BC-20013F-G_{xx}-S410
BC-20013F-G_{xx}-S410

SIZE
A4
VER
R

ITEM NO. DESCRIPTION DRAWN DATE