

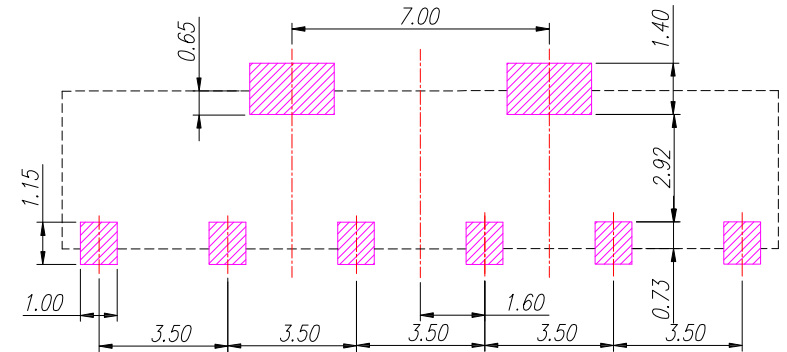
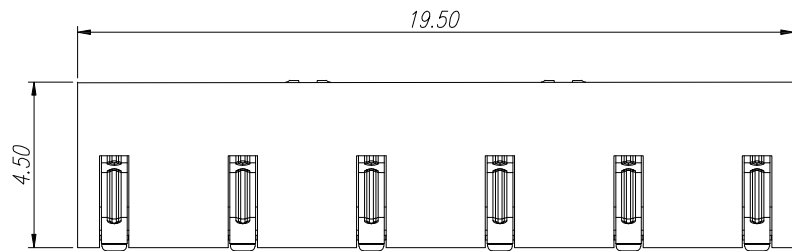
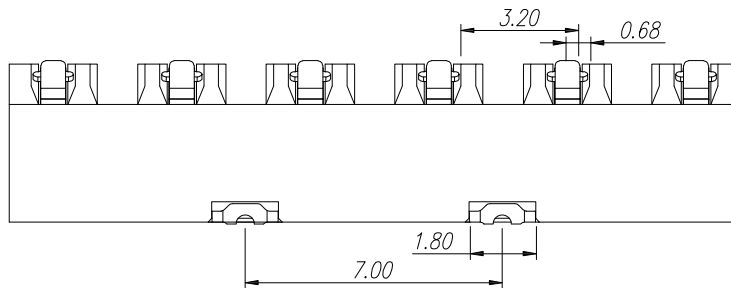


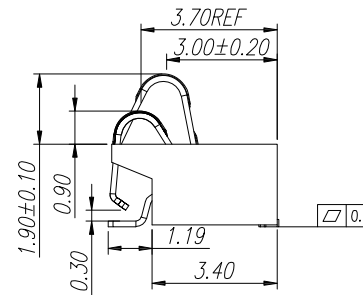

PCB LAYOUT

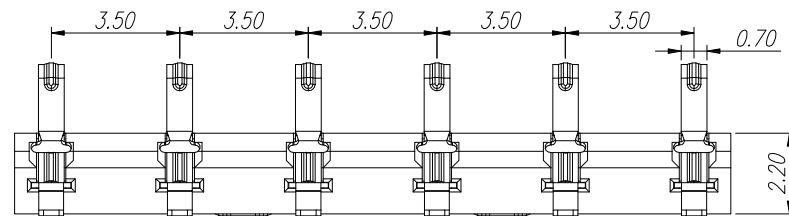

性能:

额定电流 : 3.0A

额定电压 : 24V

耐电压 : 500V

接触电阻 : 30mΩ MAX

绝缘阻抗 : 500MΩ

工作温度 : -40° --- +85°

正向力度 : 200g±20g

接触点(材质) : 铜合金, 接触点镀金3U

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

.x
.xx
.xxx

± 0.25
± 0.15
± 0.05

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

07/02/25

MAT'L

TITLE

CONNECTOR

CHECKED BY:

Jacky Chen

DATE

07/02/25

FINISH

MODLE

BATTERY CONNECTOR

APPROVED BY:

Tony Kao

DATE

07/02/25

SCALE

1 : 1

DWG NO.

BC-3522-6P-S486

SIZE

A4

SHEET NO.

1 of 1

PART NO.

BC-3522-6P-S486

VER

R

ITEM NO.	DESCRIPTION	DRAWN	DATE