
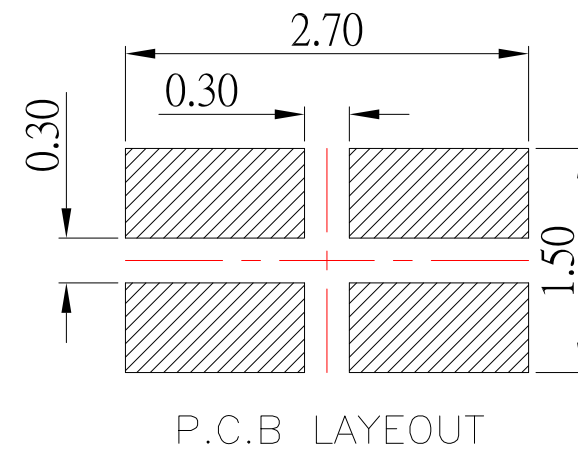
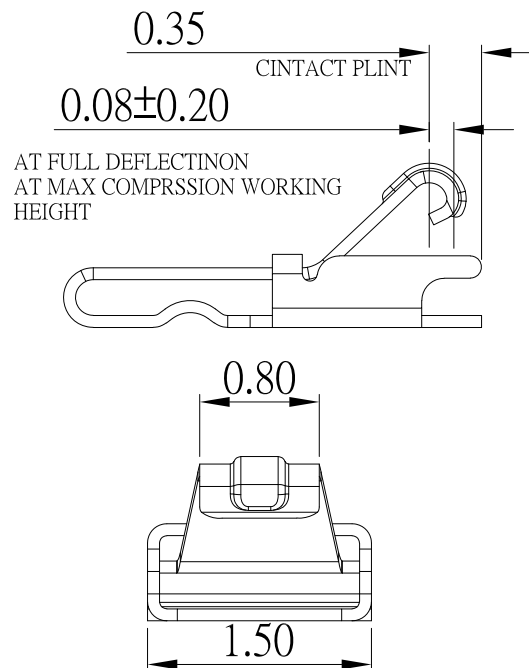


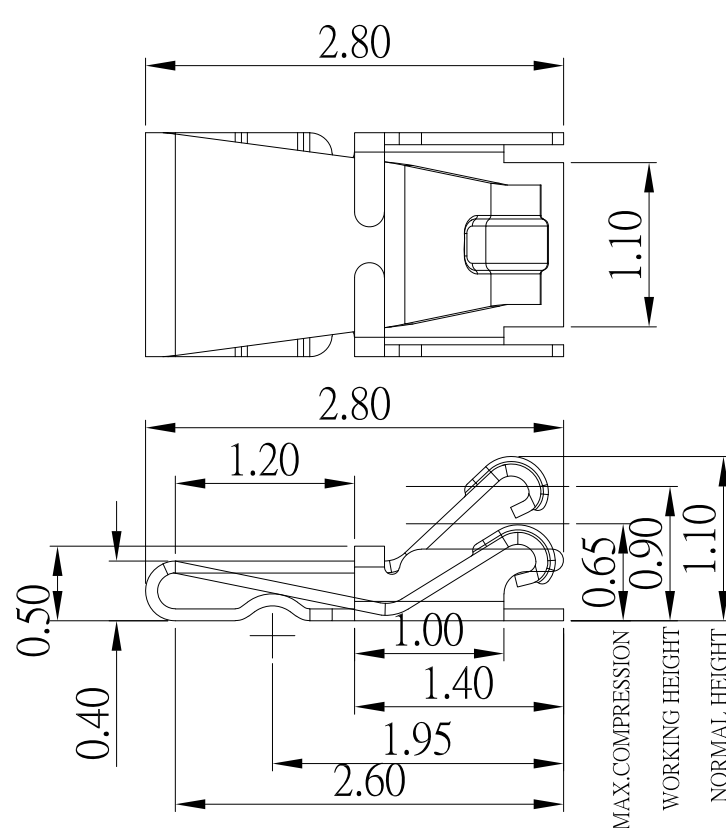

PRODUCT NO.

1. SPECIFICATIONS:

- CONTACT RESISTANCE: 80 mΩ MAX
- VOLTAGE RATING: 1.5V/AC/DC/MAX
- CURRENT RATING: 1.0A/MAX
- PRE-LOAD FORCE: 0.5±0.1N ON CONTACT POINT
- MAX.BEAM DEFLECTION: 0.7±0.1N ON CONTACT POINT
- DURABILITY: 2000 CYCLES
- OPERATING TEMPERATURE: -20°C~80°C

2. MATERIAL:

- STAINLESS STEEL

3. FINISH:

- NICKEL UNDERPLATING OVERALL



TOLERANCE UNLESS OTHERWISE STATED:

Up to 5
Above 5 ~ 15
Above 15 ~ 30
Above 30 ~ 50
Angle

±0.2
±0.3
±0.4
±0.5
±0.3°

3RD.
ANGEL'S

UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 05/29/25
DATE: 05/29/25
DATE: 05/29/25

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	Antenna Spring Terminal SMT TYPE H:1.1mm
SCALE	1 : 1	DWG NO.	AST-06-S486
SHEET NO.	1 of 1	PART NO.	AST-06-S486

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------