

PRODUCT NO.

1. SPECIFICATIONS:



- 1.1. CONTACT RESISTANCE:80 mΩ MAX
- 1.2. VOLTAGE RATING:1.5V/AC/DC/MAX
- 1.3. CURRENT RATING:1.0A/MAX
- 1.4. PRE-LOAD FORCE:0.5±0.1N ON CONTACT POINT
- 1.5. MAX.BEAM DEFLECTION:0.7±0.1N ON CONTACT POINT
- 1.6. DURABILITY:2000 CYCLES
- 1.7. OPERATING TEMPERATURE:-20°C~80°C

2. MATERIAL:

- 2.1. STAINLESS STEEL $T=0.06\pm0.005\text{MM}$

3. FINISH:

- 3.1. 304" MIN. NICKEL UNDERPLATING OVERALL

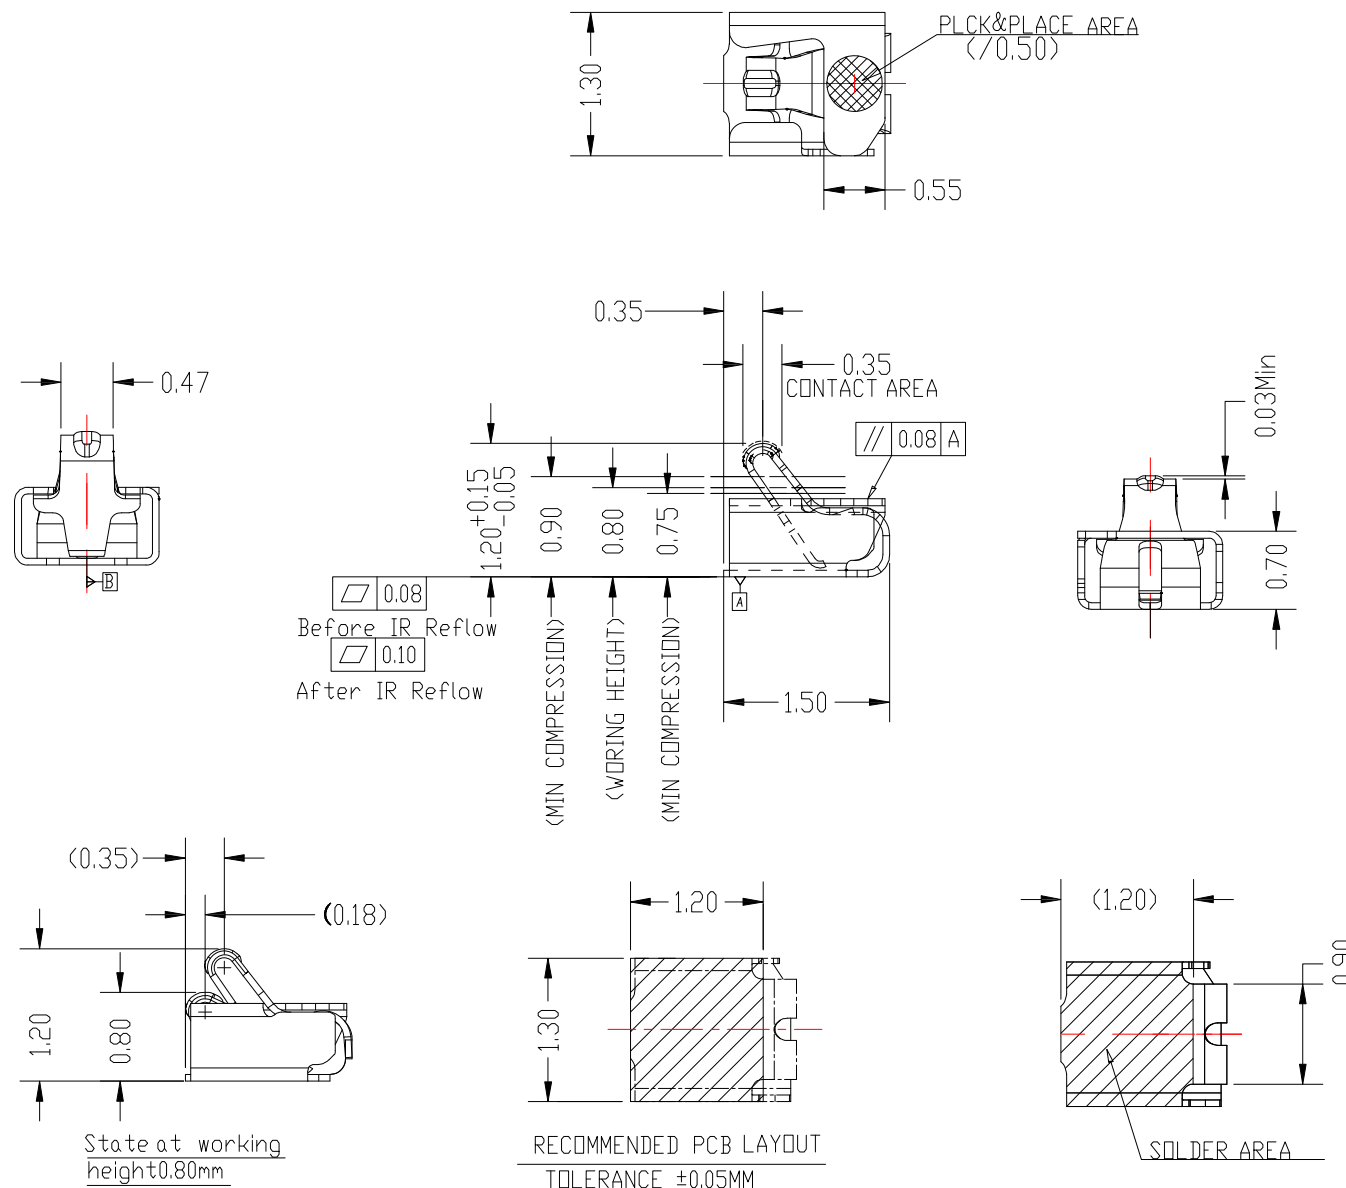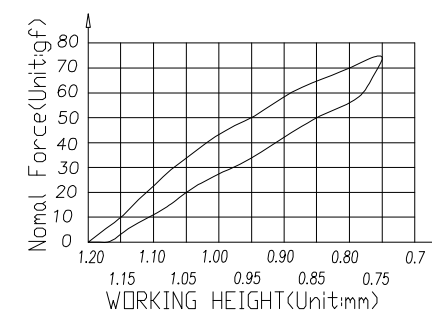

				東莞市高迪電子有限公司 DONG GUAN GAO DI ELECTRONICS CO., LTD					DRAWN BY: DATE		MAT'L		TITLE	CONNECTOR		
									CHECKED BY: DATE		FINISH		MODLE	Antenna Spring Terminal SMT 沉版型 H:1.2mm		
				TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3	3RD. ANGEL'S		UNITS	MM	SCALE	1 : 1	DWG NO.	AST-01-S486	SIZE A4	
1	更新料號	Jack	042925								APPROVED BY: DATE				VER	
ITEM NO.	DESCRIPTION	DRAWN	DATE								Tony Kao	04/29/25	SHEET NO.	1 of 1	PART NO. AST-01-S486	R1