




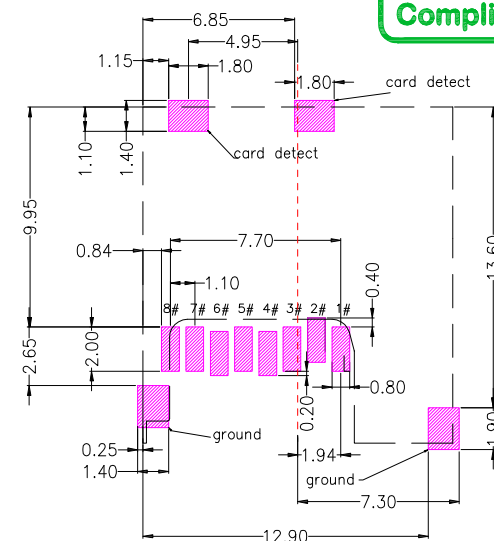


SPECIFICATION

1. Rating: 0.5A , 100V
- 2.Contact Resistance: 100 mΩ Max.
- 3.Insulation Resistance: 1000 MΩ Min.
- 4.Operating Temperature: -25°C ~85°C

- 1.Housing: LCP,Black
- 2.Contact: Phosphor Bronze
- 3.Shell: SUS

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

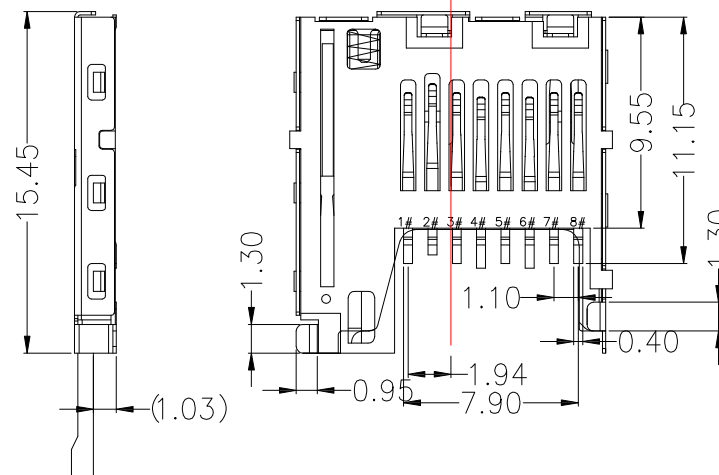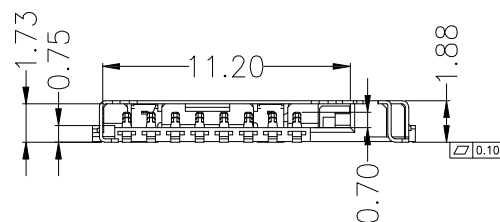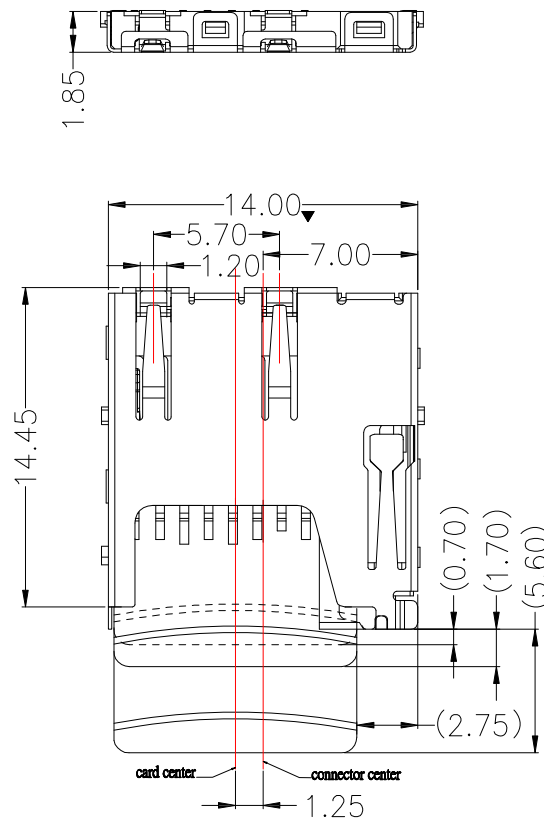

Card Detect Switch Circuit	
card detect  Ground without card (Normally closed)	card detect  Ground Card inserted

MicroSD DEFINITION	
PIN NO.	PIN ASSIGNMENT
1#	DAT2
2#	CD/DAT3
3#	CMD
4#	VDD
5#	CLK
6#	VSS
7#	DAT0
8#	DAT1

				 東莞市高迪電子有限公司 DONG GUAN GAO DI ELECTRONICS CO., LTD	DRAWN BY: DATE		MAT'L		TITLE	CONNECTOR	
					Jack Lu	10/11/18	FINISH		MODLE	T-FLASH 內桿常閉卡座 PUSH-PUSH	
					Jacky Chen	10/11/18		SCALE	1 : 1	DWG NO.	SD-TFC0001S10-S267
2	新增Switch Cirsuit	Jack	101118		APPROVED BY: DATE		SHEET NO.	1 of 1	PART NO.	SD-TFC0001S10-S267	VER R2
1	更新料號	Jack	100918		Tony Kao 10/11/18						
ITEM NO.	DESCRIPTION	DRAWN	DATE	TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ± 0.2 Above 5 ~ 15 ± 0.3 Above 15 ~ 30 ± 0.4 Above 30 ~ 50 ± 0.5 Angle ± 0.3°	3RD. ANGEL'S		UNITS	MM			