
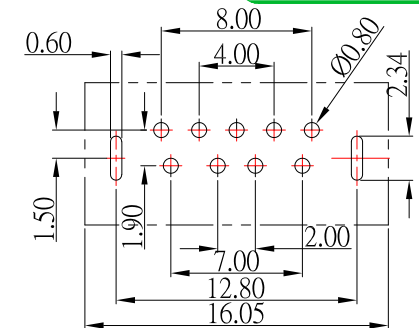

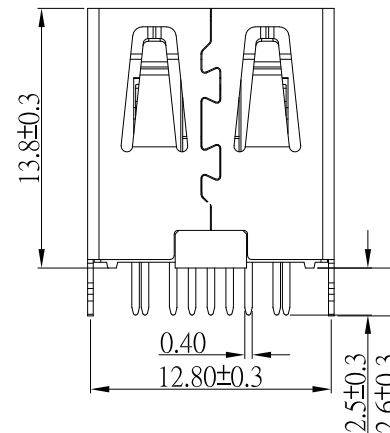
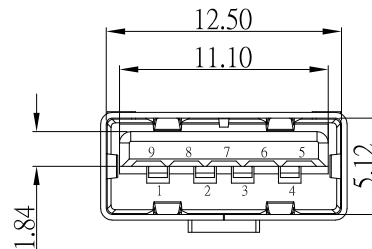
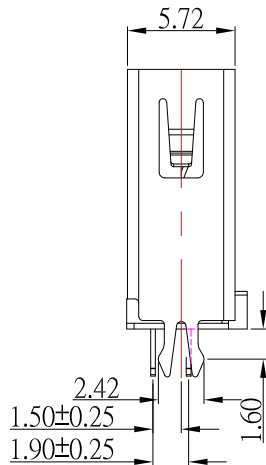


SUA-110V13-32x-S410

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

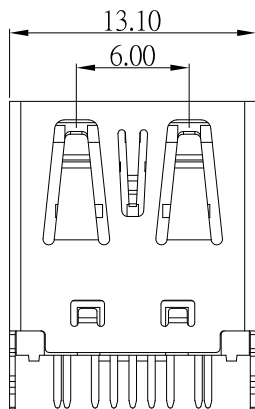

PCB LAYOUT

NOTE:

1.MATERIAL:

1.1 Housing: LCP,Blue

1.2 Contact: 4-PIN:Phosphor Bronze
5-PIN:Brass

1.3 Shell: SUS

2.Finish:

2.1 Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall

2.2 Shell: Nickel under Plated surface layer

3.SPECIFICATION:

3.1 Rate: 1.5 A

3.2 Insulator Resistance:100M Ω Min

3.3 Dielectric Strength: 100V AC

3.4 Contact Resistance: 30m Ω Max

3.5 Durability: 5000 cycles

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5
Above 5 ~ 15
Above 15 ~ 30
Above 30 ~ 50
Angle

±0.2
±0.3
±0.4
±0.5
±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

09/02/25

CHECKED BY:

Jacky Chen

DATE

09/02/25

APPROVED BY:

Tony Kao

DATE

09/02/25

MAT'L

FINISH

SCALE

SHEET NO.

1 : 1

1 of 1

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

USB 3.1 GEN2 10G AF 180度無捲邊魚叉腳 H13.8 DIP

SUA-110V13-32x-S410

SUA-110V13-32x-S410

SIZE

A4

VER

R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------