



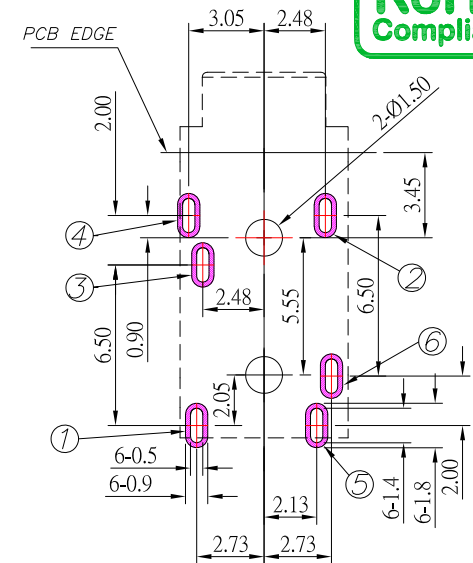

SPECIFICATION

1. Rating : 12V ; 1.0A ;
2. Contact resistance : $\leq 100\text{m}\Omega$;
3. Insulation resistance : $\geq 100\text{M}\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-30N;
6. life test : 5,000 cycles .



7	HOUSING	1	PA9T ; BLACK
6	TERMINAL 6#	1	PHOSPHOR BRONZE ; NICKEL UNDER PLATING OVERALL, GOLD PLATING ON SOLDER & CONTACT AREA
5	TERMINAL 5#	1	
4	TERMINAL 4#	1	
3	TERMINAL 3#	1	
2	TERMINAL 2#	1	
1	TERMINAL 1#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD PLATING ON SOLDER & CONTACT AREA
ITEM	NAME	Q'TY	DESCRIPTION

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

1	更新圖面	Jack	041526
ITEM NO.	DESCRIPTION	DRAWN	DATE

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Above 50	± 0.6				

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	04/15/26					
CHECKED BY:	DATE	FINISH		MODLE	PHONE JACK	
Jacky Chen	04/15/26	SCALE	1 : 1	DWG NO.	PJ-T32307I-S457	SIZE A4
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	PJ-T32307I-S457	VER R1
Tony Kao	04/15/26					