


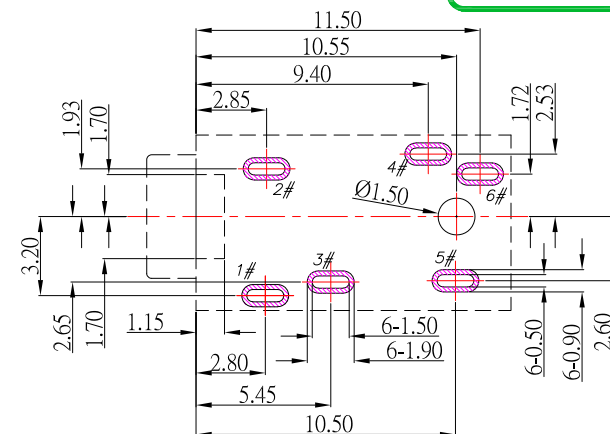

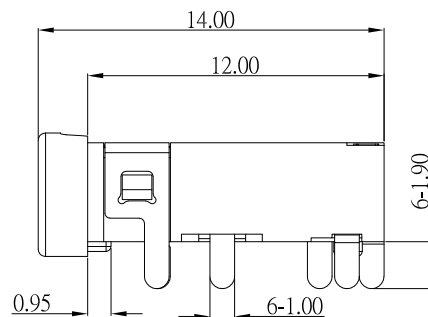
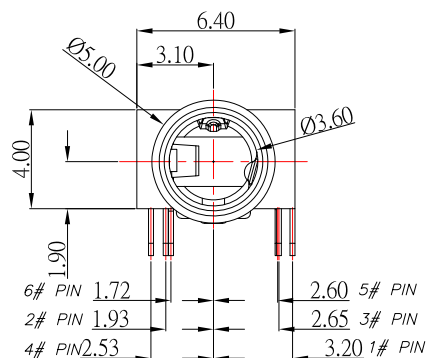


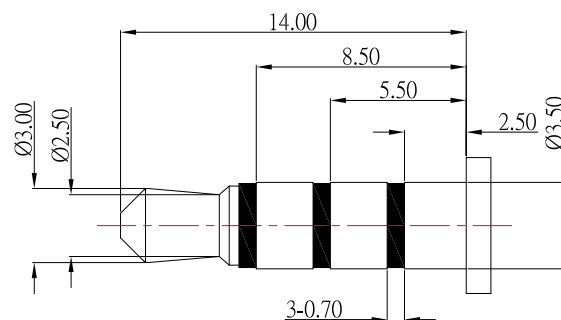

P.C.B LAYOUT
TOP VIEW

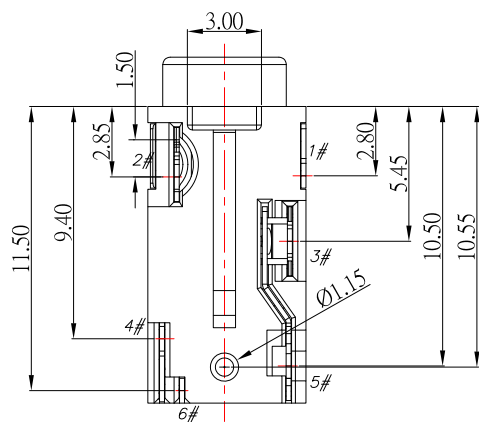

(ø3.50mm 4 POLE PLUG DETAIL DRAWING)



SPECIFICATION

- 1.Rating : 1.0A ;
- 2.Contact resistance : $\leq 50\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

7	TERMINAL 6#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
6	TERMINAL 5#	1	
5	TERMINAL 4#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
4	TERMINAL 3#	1	
3	TERMINAL 2#	1	
2	TERMINAL 1#	1	BRASS; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.
1	HOUSING	1	PA9T,COLOR BLACK
ITEM	NAME	Q'TY	DESCRIPTION



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Angle	$\pm 0.3^\circ$				

DRAWN BY: DATE		MAT'L		TITLE	JACK	
Jack Lu	05/26/25					
CHECKED BY: DATE		FINISH		MODLE	PHONE JACK	
Jacky Chen	05/26/25					
APPROVED BY: DATE		SCALE	1 : 1	DWG NO.	PJ-T32307S-S457	SIZE
Tony Kao	05/26/25					A4
SHEET NO.		1 of 1	PART NO.	PJ-T32307S-S457		VER
						R