

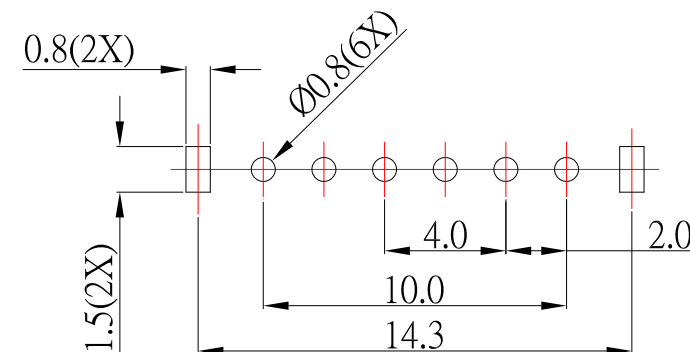


SCHEMATIC (SHORTING)

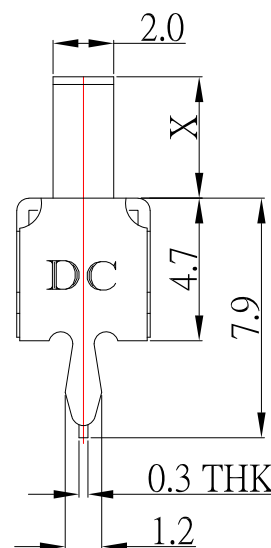

PCB LAYOUT

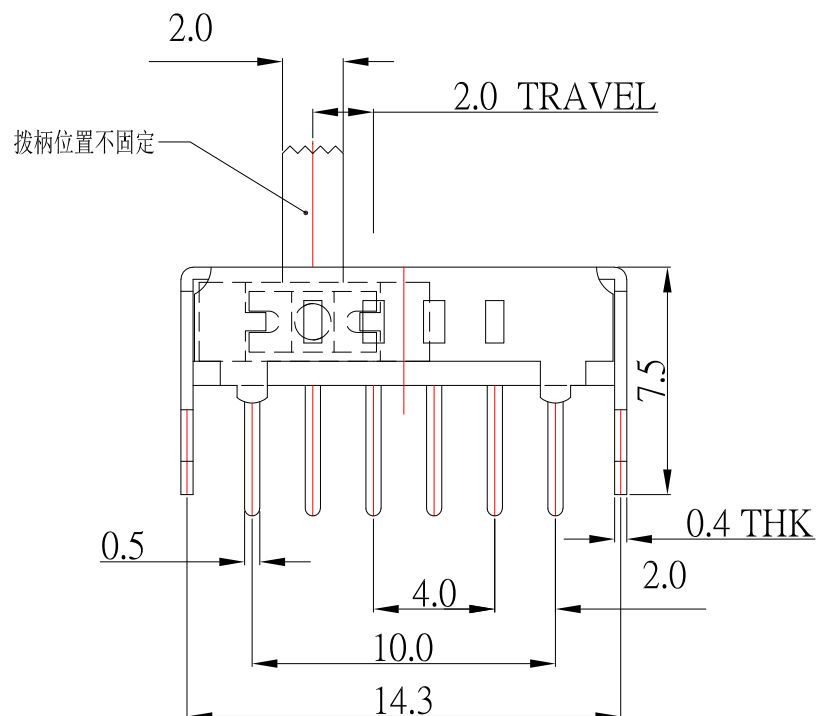

SPECIFICATIONS

Model No.	X(mm)
SS-14D01-GC2	2mm
SS-14D01-GC3	3mm
SS-14D01-GC4	4mm
SS-14D01-GC5	5mm
SS-14D01-GC6	6mm
SS-14D01-GC7	7mm
SS-14D01-GC8	8mm
SS-14D01-GC9	9mm

Rating	DC 50V 0.3A
Circuit	1P - 4T
Timing	Shorting
Contact Resistance	50mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	300gf ±100gf
Operating Life (cycle)	10,000 Min.

6	SPRING PLATED	2	PHOSPHOR BRONZE	Natural
5	CONTACT CLIP	1	PHOSPHOR BRONZE	Ag-Plated
4	TERMINAL	6	BRASS	Ag-Plated
3	BASE	1	PHENOL IC RESIN	Natural
2	FRAME	1	SPCC	Ni-Plated
1	KNOB	1	PA66	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK



TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	07/16/25
CHECKED BY:	DATE
Jacky Chen	07/16/25
APPROVED BY:	DATE
Tony Kao	07/16/25

MAT'L
FINISH
SCALE
SHEET NO

	1 : 1
b.	1 of 1

	TITLE
	MODLE
	DWG NO.
1	PART NO.

SWITCH
SLIDE SWITCH
SS-14D01-GC _x -S191
SS-14D01-GC _x -S191

	SIZE
	A4
	VE
	P