


SS-H4202S_{x-x}-S246

PART NO.	X(mm)
BLANK	2.0
A	4.0



SLIDER COLOR :

Black : B



White : W



CIRCUIT DIAGRAM

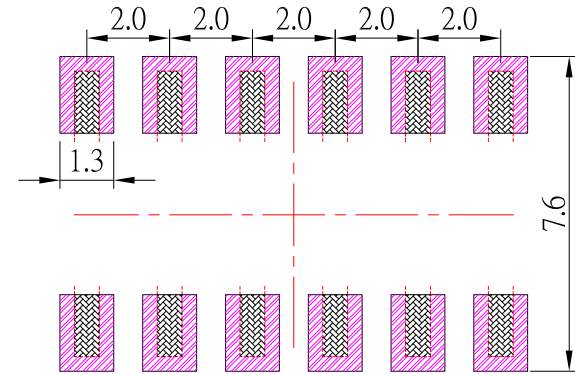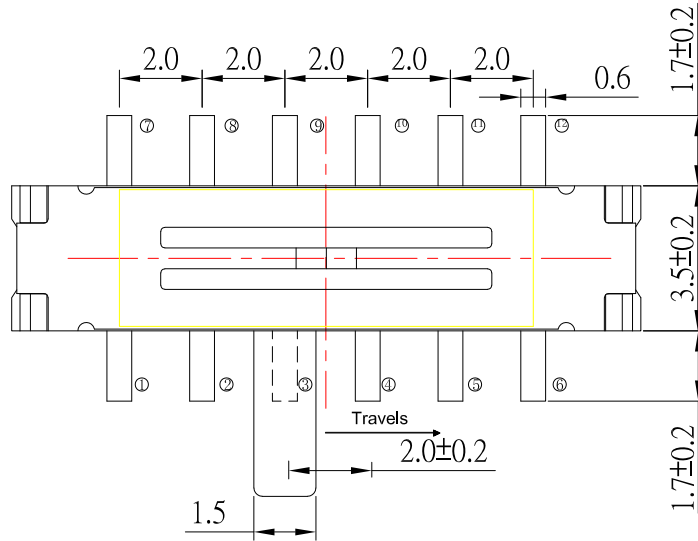

P.C.B LATOUT

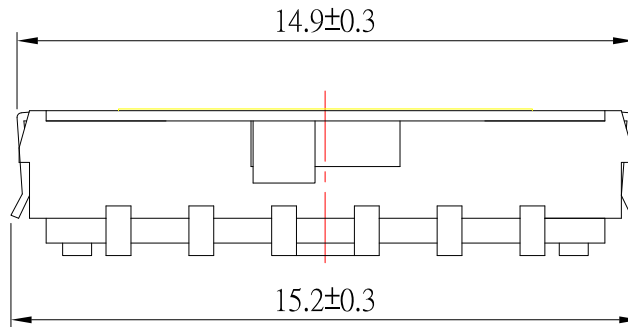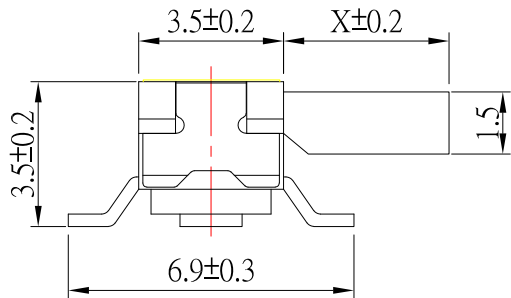

SPECIFICATIONS

Rating	0.1A , 12V DC
Insulation Resistance	50MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	230 ± 80gf
Operating Life	10,000 cycles

F	DUST COVER	1	PI FILM(Yellow)	
E	TERMINAL	12	PHOSPHOR BRONZE	Ag plated
D	CLIP	4	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	BASE	1	LCP(Black)	
A	SLIDER	1	PA46(Black)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

3	新增柄長選項	Jack	052725
2	更新料號	Jack	032720
1	更新材質	Jack	051815
ITEM NO.	DESCRIPTION	DRAWN	DATE



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	05/27/25
CHECKED BY:	DATE
Jacky Chen	05/27/25
APPROVED BY:	DATE
Tony Kao	05/27/25

MAT'L		TITLE	SWITCH
FINISH		MODLE	SLIDE SWITCH 4P2T SMT TYPE 90度
SCALE	1 : 1	DWG NO.	SS-H4202S _{x-x} -S246
SHEET NO.	1 of 1	PART NO.	SS-H4202S _{x-x} -S246
		SIZE	A4
		VER	R3