

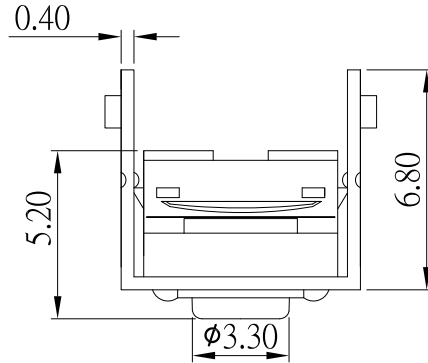


CIRCUIT DIAGRAM





IP67

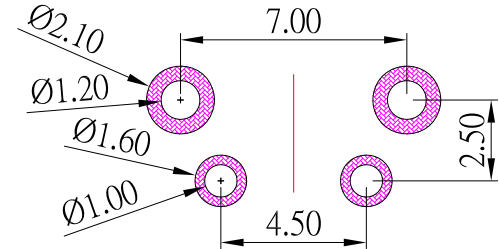

P.C.B LAYOUT

SPECIFICATIONS

Rating	0.05A , 12V DC
Contact Resistance	100mΩ Max.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Travele	0.40±0.15mm
Operating Force	280 ± 70gf
Operating Life	50,000

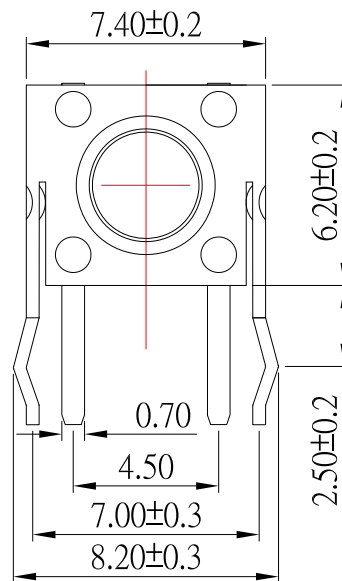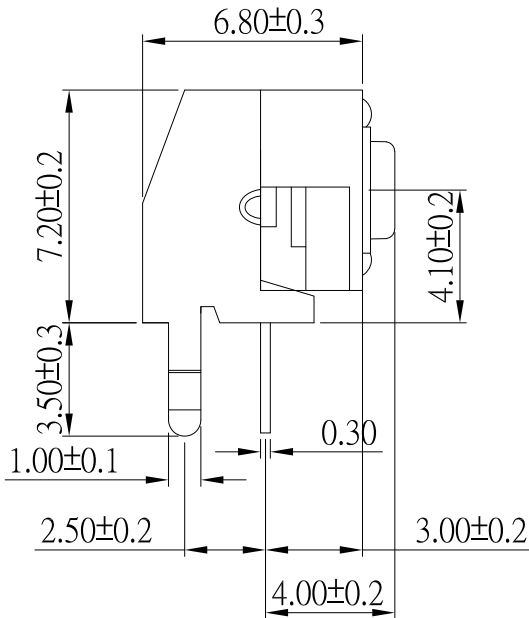

H	PLASTIC COVER	1	PPA(Black)	
G	WATERPROOFBOARD	1	SILICONE(Black)	
F	DUST-PROOF FILM	1	PI(Yellow)	
E	METAL COVER	1	BRASS	Ni plated
D	STEM	1	PPA(Black)	
C	CONTACT	1	SUS	Ag plated
B	THERMINAL	2	BRASS	Ag plated
A	BASE	1	PPA(Black)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	04/22/25	FINISH	MODLE	TACT SWITCH 6X6 ,90度帶支架防水開關
CHECKED BY:	DATE	SCALE	DWG NO.	TS-A20WV2-3-S246
Jacky Chen	04/22/25	1 : 1	PART NO.	TS-A20WV2-3-S246
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	04/22/25			