




IP67

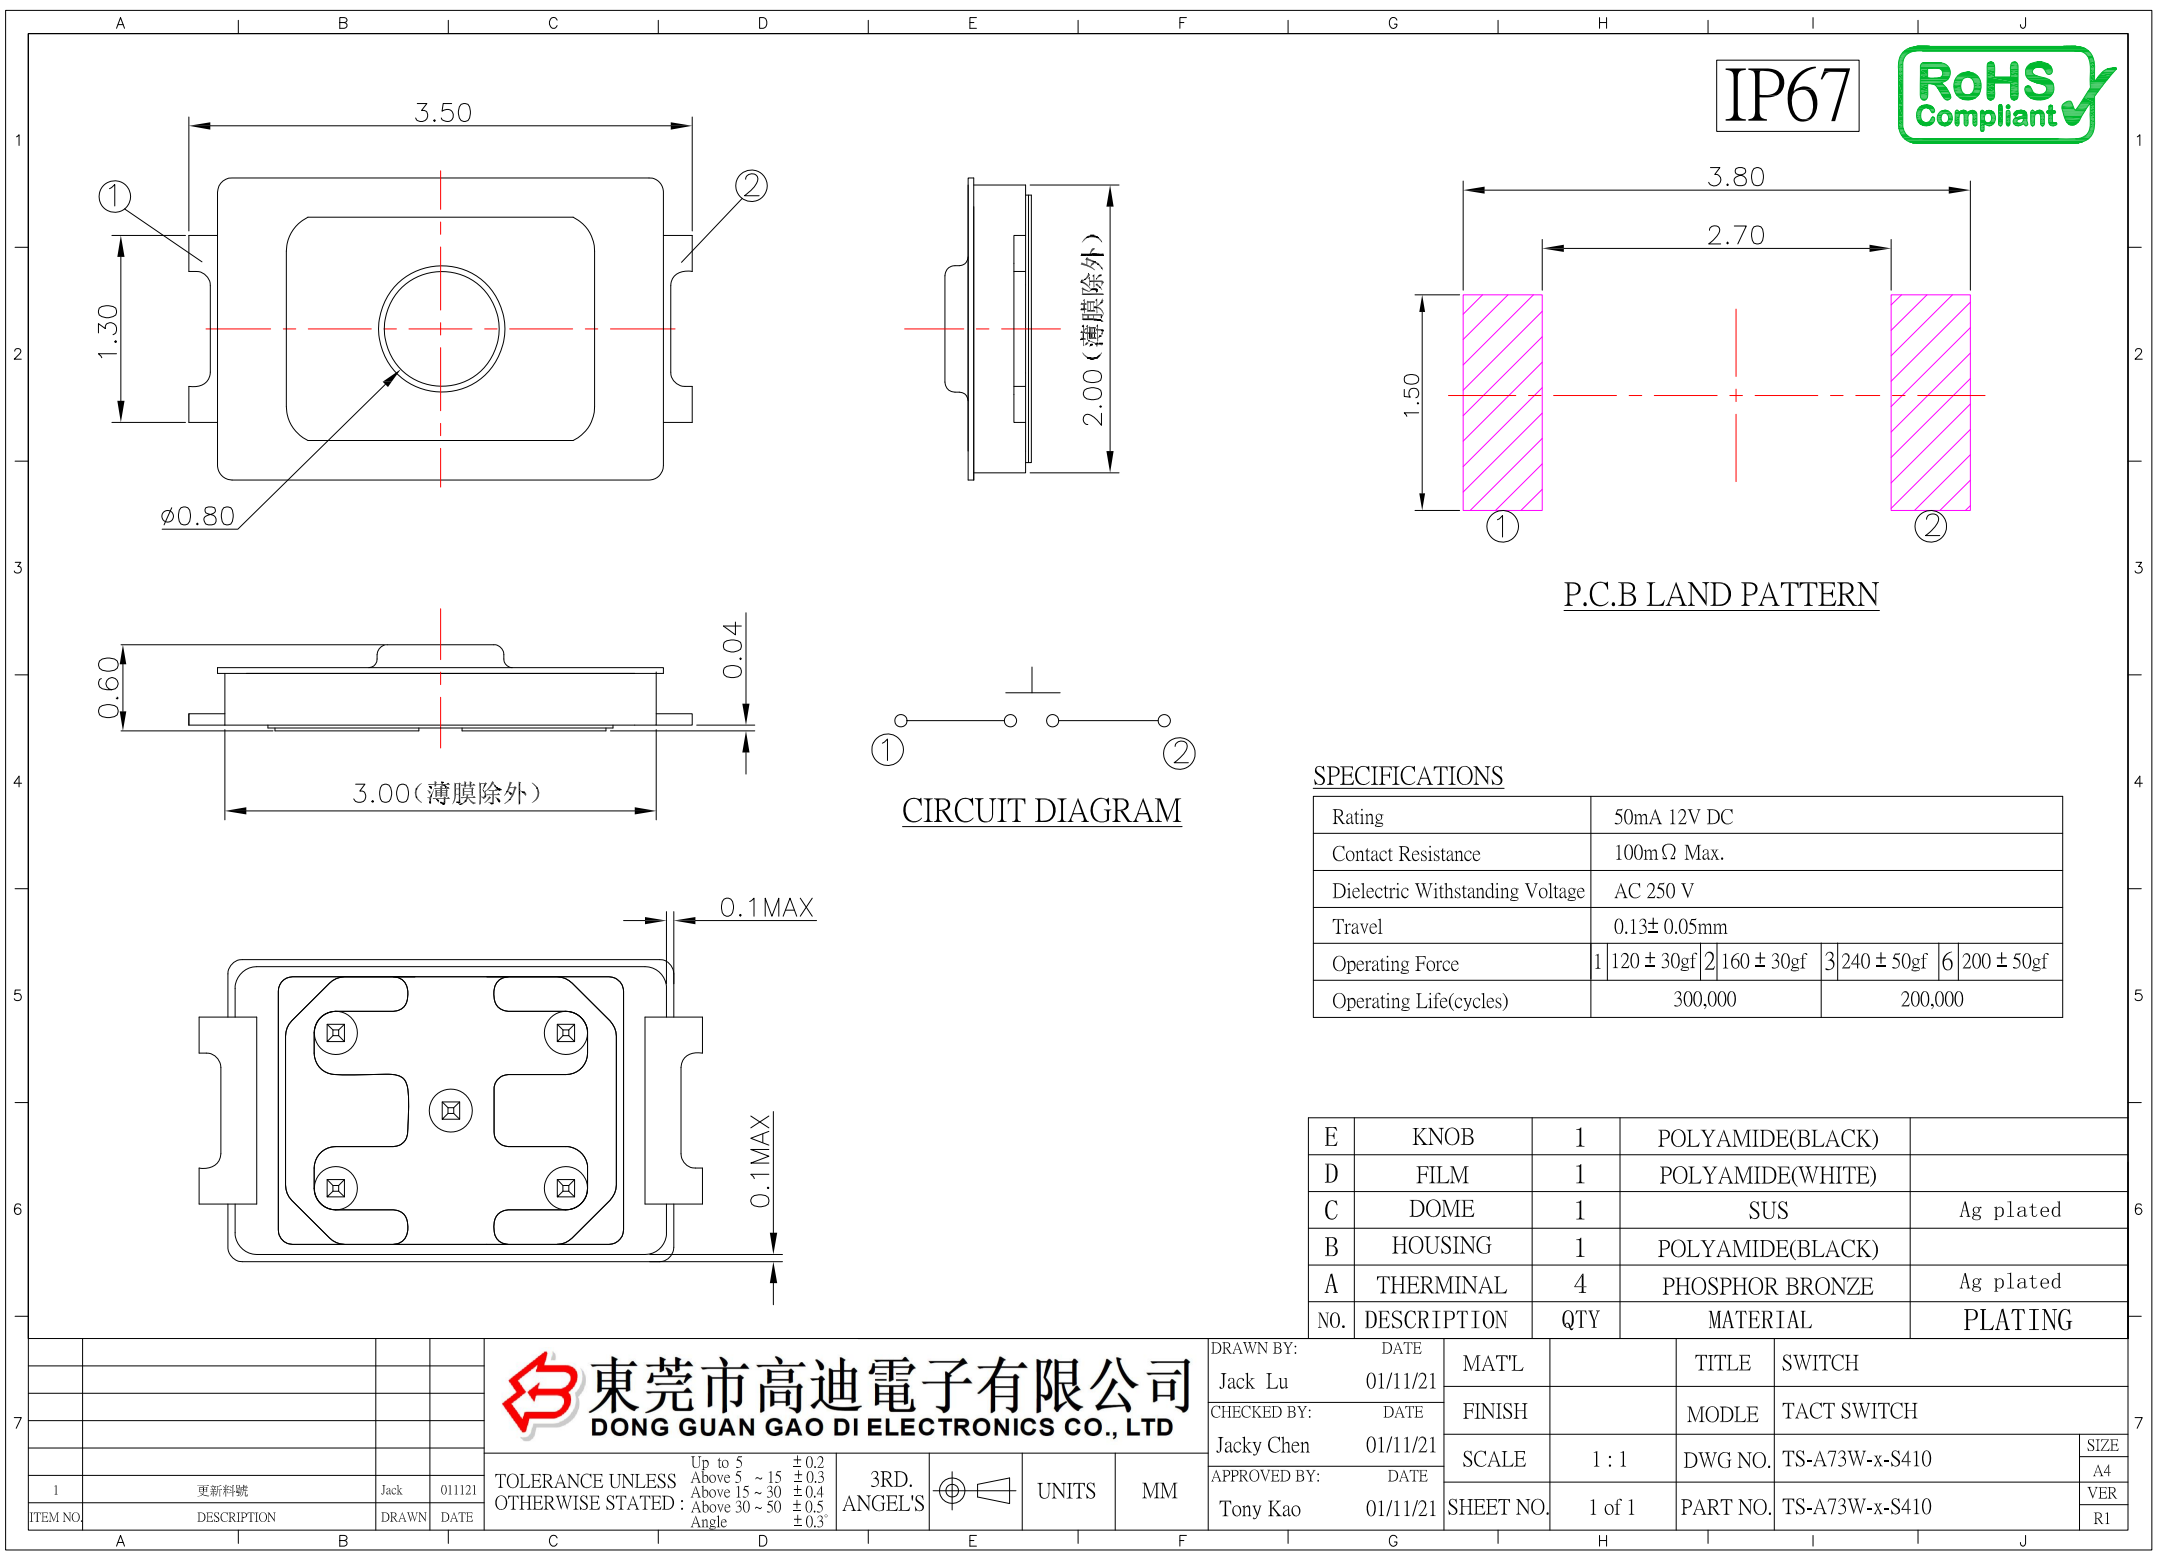

P.C.B LAND PATTERN

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	50mA 12V DC			
Contact Resistance	100mΩ Max.			
Dielectric Withstanding Voltage	AC 250 V			
Travel	0.13± 0.05mm			
Operating Force	1 120 ± 30gf	2 160 ± 30gf	3 240 ± 50gf	6 200 ± 50gf
Operating Life(cycles)	300,000		200,000	

E	KNOB	1	POLYAMIDE(BLACK)	
D	FILM	1	POLYAMIDE(WHITE)	
C	DOME	1	SUS	Ag plated
B	HOUSING	1	POLYAMIDE(BLACK)	
A	THERMINAL	4	PHOSPHOR BRONZE	Ag plated
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	±0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	±0.3				
	Above 15 ~ 30	±0.4				
	Above 30 ~ 50	±0.5				
	Angle	±0.3°				

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	01/11/21			
CHECKED BY:	DATE	FINISH	MODLE	TACT SWITCH
Jacky Chen	01/11/21			
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO. TS-A73W-x-S410
		SHEET NO.	1 of 1	PART NO. TS-A73W-x-S410
				SIZE A4
				VER R1