






IP67

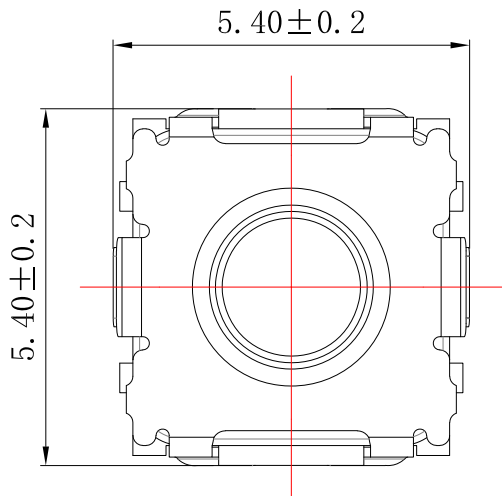

CIRCUIT DIAGRAM

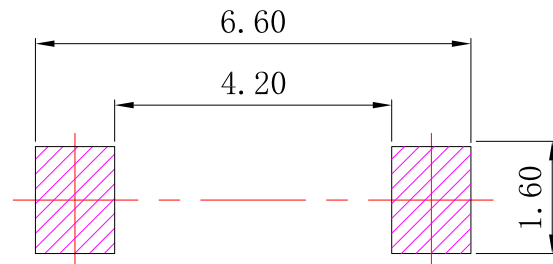

P.C.B LAYOUT

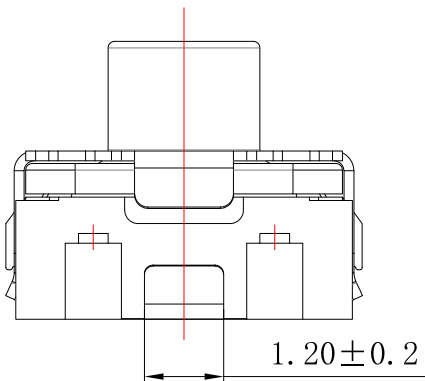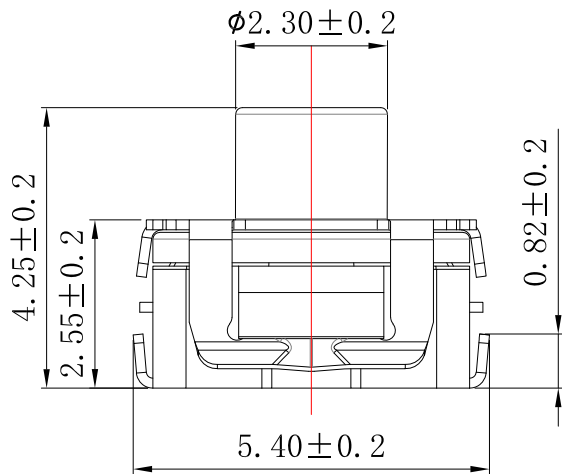

SPECIFICATIONS

Rating	DC 16V, 50mA
Contact Resistance	100mΩ Max.
Travel	0.7 ± 0.3mm
Operating Force	300 ± 60gf
Operating Life (cycles)	200,000

5	STEM	1	SILCA GEL	Blue
4	COVER	1	SUS	
3	CONTACT	1	SUS	Ag plating
2	TERMINAL	2	H65	Ag plating
1	BASE	1	PA6T	Black
NO	PART NAME	QTY	MATERIAL	REMARK



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

06/19/25

CHECKED BY:

Jacky Chen

DATE

06/19/25

APPROVED BY:

Tony Kao

DATE

06/19/25

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

TACT SWITCH Waterproof Type

TS-B06W-4B-S138

TS-B06W-4B-S138

SIZE

A4

VER

R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------