


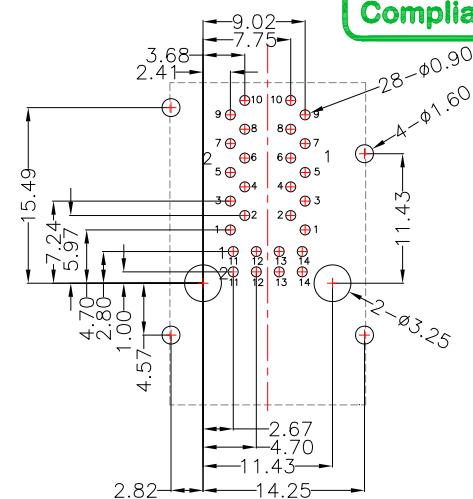


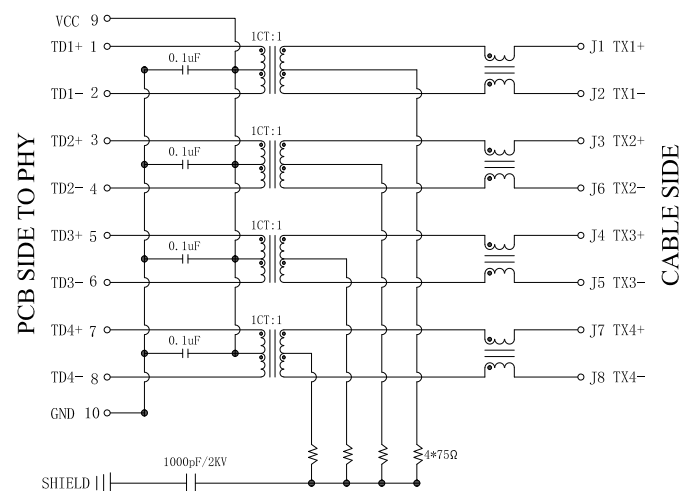

PCB LAYOUT

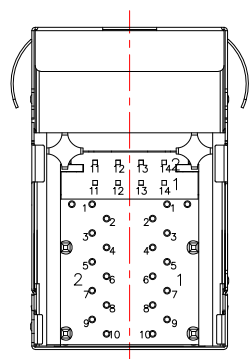

SCHEMATIC

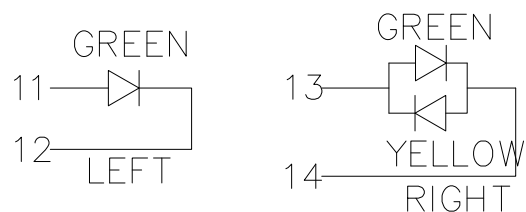

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	565nm	20mA	2.2-2.4V
Yellow	590nm	20mA	2.1-2.5V

Material:

- 1.Housing : PA66,Black
- 2.Contact : Phosphor Bronze , Gold Plating over Nickel
- 3.Shield : Brass , Nickel Plated
- 4.Terminal Bracket : PBT,Black

Environmental:

- 1.Operation Temperature : -40℃ ~ +85℃
2.Storage Temperature : -40℃ ~ +85℃

				 東莞市高迪電子有限公司 DONG GUAN GAO DI ELECTRONICS CO., LTD Up to 5± 0.2 Above 5 ~ 15± 0.3 Above 15 ~ 30± 0.4 Above 30 ~ 50± 0.5 Above 50 ~ 100± 0.6 Above 100 ~ 200± 0.7 Above 200 ~ 500± 0.8 Above 500 ~ 1000± 0.9 Above 1000 ~ 2000± 1.0 Above 2000 ~ 5000± 1.2 Above 5000 ~ 10000± 1.5 Above 10000 ~ 20000± 1.8 Above 20000 ~ 50000± 2.0 Above 50000 ~ 100000± 2.5 Above 100000 ~ 200000± 3.0 Above 200000 ~ 500000± 3.5 Above 500000 ~ 1000000± 4.0 Above 1000000 ~ 2000000± 4.5 Above 2000000 ~ 5000000± 5.0 Above 5000000 ~ 10000000± 5.5 Above 10000000 ~ 20000000± 6.0 Above 20000000 ~ 50000000± 6.5 Above 50000000 ~ 100000000± 7.0 Above 100000000 ~ 200000000± 7.5 Above 200000000 ~ 500000000± 8.0 Above 500000000 ~ 1000000000± 8.5 Above 1000000000 ~ 2000000000± 9.0 Above 2000000000 ~ 5000000000± 9.5 Above 5000000000 ~ 10000000000± 10.0 3RD. ANGEL'S  UNITS MM						DRAWN BY:	DATE	MAT'L		TITLE	RJ45
										CHECKED BY:	DATE	FINISH		MODLE	RJ45 2X1 1000BASE WITH LED
										Jacky Chen	02/11/25		SCALE	1 : 1	DWG NO.
				APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	MJ45-21Q04D-GGY-S473	VER R					
ITEM NO.	DESCRIPTION	DRAWN	DATE	Tony Kao	02/11/25										