

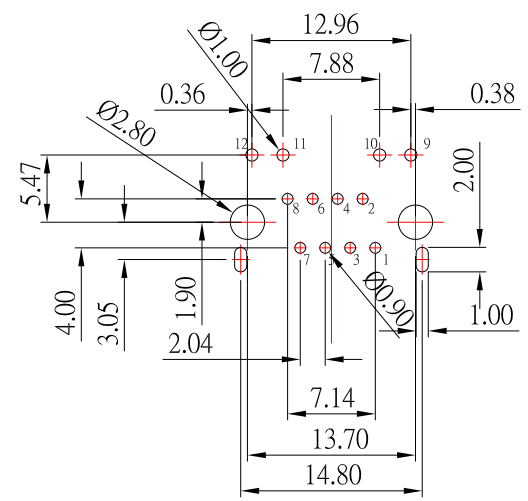

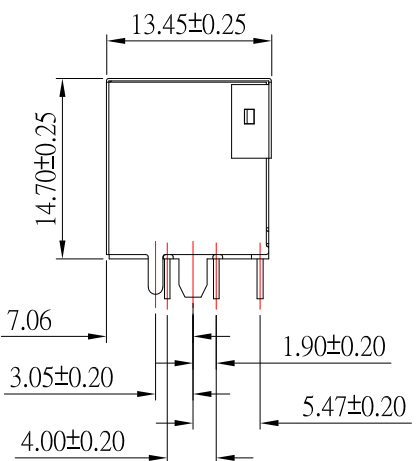


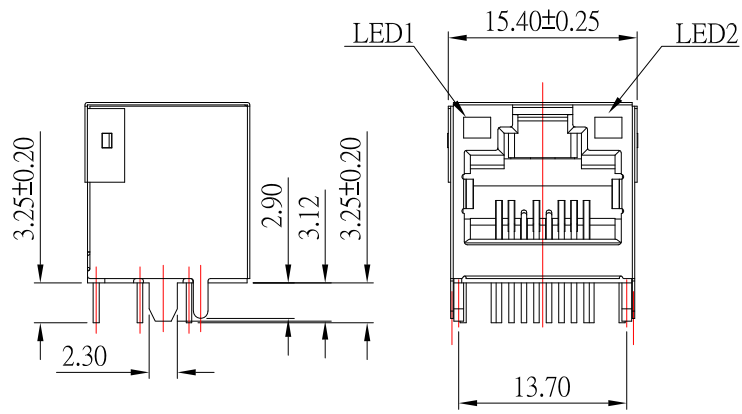

PCB LAYOUT



RJ45-6371x-GY-S492

鍍層厚度 :

Blank : 1u"
1 : 3u"
2 : 15u"
3 : 30u"
5 : 6u"
6 : 50u"

SPECIFICATIONS

Electrical:

- 1.Voltage Rating : 125 VAC RMS
- 2.Current Rating : 1.5 AMP
- 3.Contact Resistance : 20 mΩ MAX
- 4.Insulation Resistance : 1000 MΩ MIN. @500 VDC
- 5.Dielectric Strength : 1000 VAC RMS 60 HZ 1 MIN

Material:

- 1.Housing : PA9T,Black
- 2.Contact : Phosphor Bronze , Gold Plating over Nickel
- 3.Shield : Brass , Nickel Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
- 2.Storage Temperature : -40°C ~ +85°C



TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	RJ45
Jack Lu	08/22/25	FINISH	MODLE	RJ45 Cat.6 SIDE ENTRY PCB FTP 8P W/I LED
CHECKED BY:	DATE	SCALE	DWG NO.	RJ45-6371x-GY-S492
Jacky Chen	08/22/25	1 : 1	PART NO.	RJ45-6371x-GY-S492
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	08/22/25			

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------