


RJ45-58T811E-x-S307

鍍層厚度：

Blank : 1u"
1 : 3u"
2 : 15u"
3 : 30u"
5 : 6u"

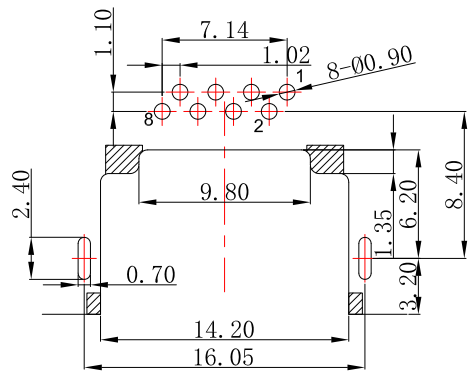

PCB LAYOUT

SPECIFICATIONS

Electrical:





- 1.Voltage Rating : 125 VAC
- 2.Current Rating : 1.5 A
- 3.Contact Resistance : 40 mΩ MAX
- 4.Insulation Resistance : 500 MΩ MIN
- 5.Dielectric Strength : 500 VAC

Material:

- 1.Houshing : PA9T
- 2.Contact : Phosphor Bronze , Gold Plating over Nickel
- 3.Shield : SUS , Nickel Plated

Environmental:

- 1.Operation Temperature : -40°C ~ +85°C
- 2.Storage Temperature : 0°C ~ +70°C

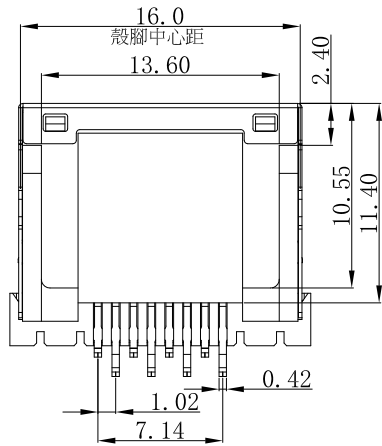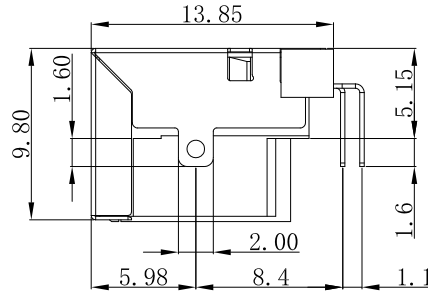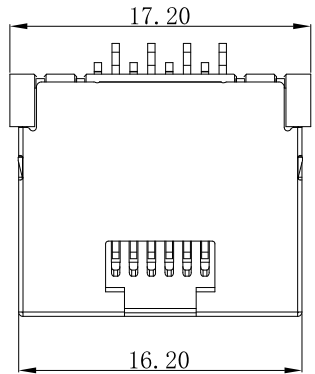

東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	RJ45
Jack Lu	07/28/25	FINISH		MODLE	RJ45 8P8C 沉板式H9.8 mm DIP
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	RJ45-58T811E-x-S307
Jacky Chen	07/28/25	SHEET NO.	1 of 1	PART NO.	RJ45-58T811E-x-S307
APPROVED BY:	DATE				
Tony Kao	07/28/25				

ITEM NO.	DESCRIPTION	DRAWN	DATE