
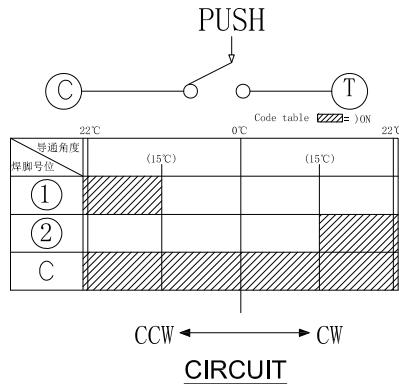
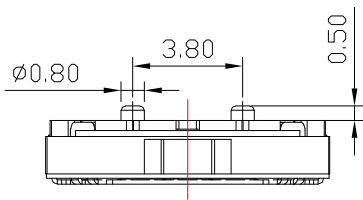
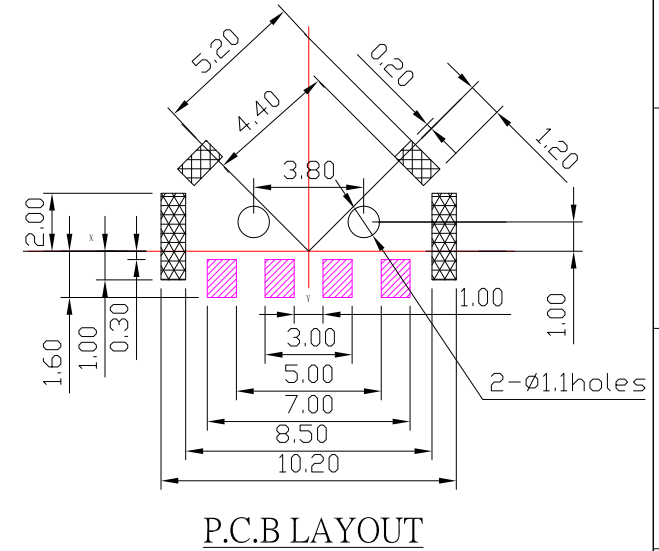
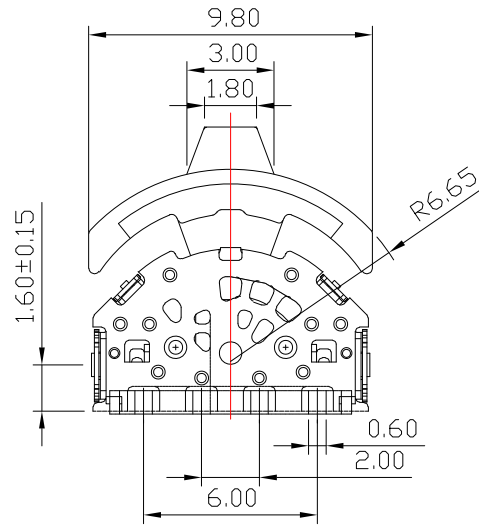
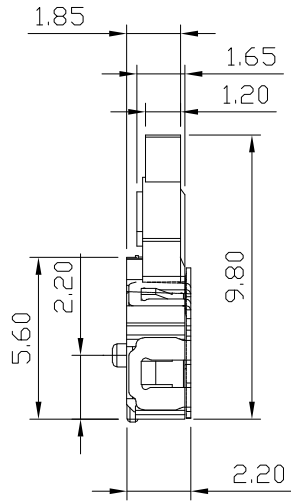


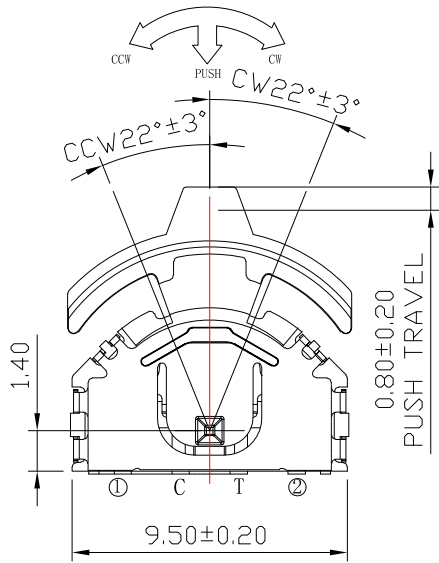

SPECIFICATIONS:

- Operating temperature range: -10°C to $+60^\circ\text{C}$
- Rating: 10mA , 5V DC
- Insulation resistance: $100\text{M}\Omega$ min. 100V DC
- Dielectric strength: 100V AC for 1Min
- Contact resistance: $300\text{m}\Omega$ Max
- Life: $500,000$ Cycles
- Travel: $0.8 \pm 0.20\text{mm}$
- Operating force: $300 \pm 100\text{gf}$, $80 \pm 50\text{gf}$

東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
Above 5 ~ 15	± 0.3				
Above 15 ~ 30	± 0.4				
Above 30 ~ 50	± 0.5				
Angle	$\pm 0.3^\circ$				

DRAWN BY:	DATE	MAT'L		TITLE	SWITCH
Jack Lu	02/27/25	FINISH		MODLE	LEVER PUSH SWITCH
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	K31-S410
Jacky Chen	02/27/25	SHEET NO.	1 of 1	PART NO.	K31-S410
APPROVED BY:	DATE				
Tony Kao	02/27/25				

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------