

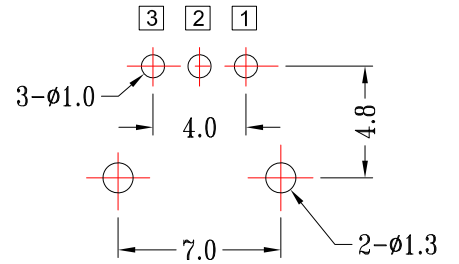



CIRCUIT DIAGRAM

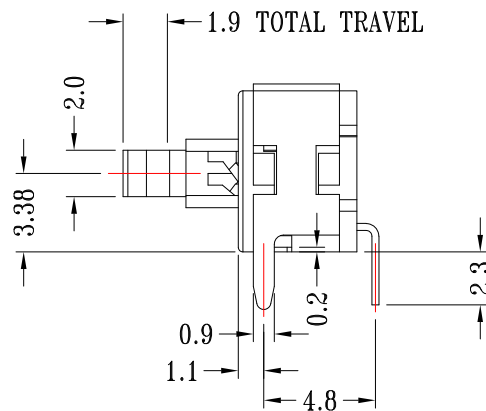

P.C.B LAYOUT
TOP VIEW

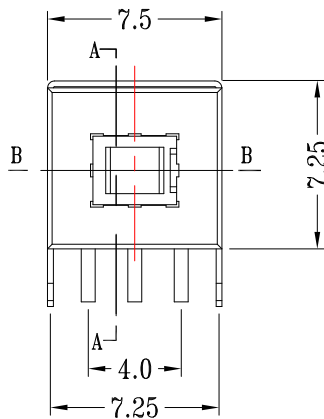

SPECIFICATIONS:

- 1.RATING: 12V DC , 50mA
- 2.CONTACT RESISTANCE: 100mΩ Max
- 3.INSULATION RESISTANCE: 100MΩ Min
- 4.OPERATING FORCE: 200±50 gf
- 5.OPERATING LIFE:10,000 Cycles
- 6.OPERATION: LOCK

7	SPRING	SUS	1	NATURAL
6	FRAME	SUS	1	Sn PLATED
5	METAL TERMINAL	BRASS	3	Ag PLATED
4	CASE	PPA	1	BLACK
3	COVER	PPA	1	GRAY
2	CONTACT PIECE	PBS	6	Ag CLAD
1	KNOB	PPA	1	WHITE
NO.	NAME	MATERIALS	Q'TY	REMARK



TOLERANCE UNLESS OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	07/02/25	FINISH	MODLE	PUSH SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	PS-22E69AS-S190
Jacky Chen	07/02/25	1 : 1	PART NO.	PS-22E69AS-S190
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	07/02/25			

SIZE	A4
VER	R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------