
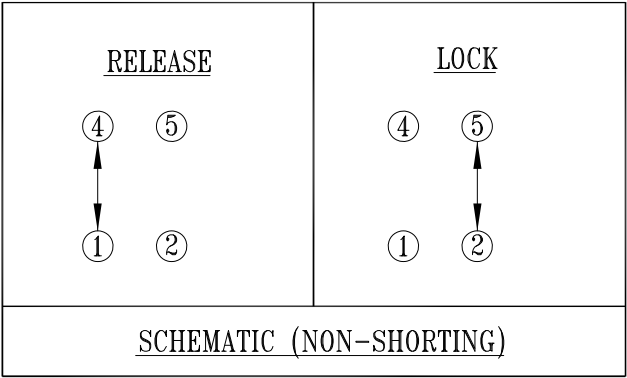
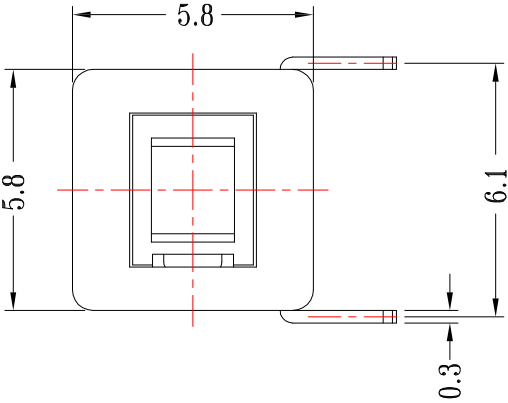
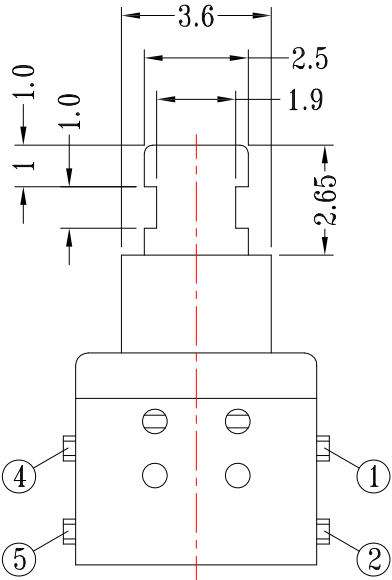


P.C.B LAYOUT

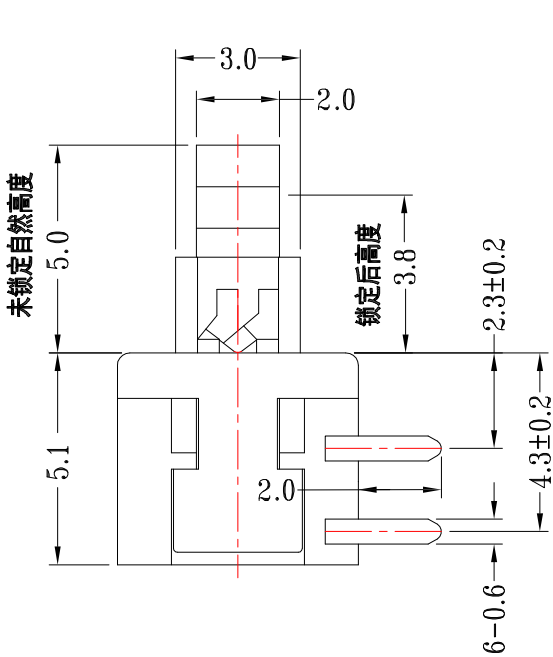

SPECIFICATIONS:

- 1.RATTING: 30V DC , 100mA
- 2.CONTACT RESISTANCE: 200mΩ Max
- 3.INSULATION RESISTANCE: 100MΩ Min
- 4.OPERATING FORCE: 250±50 gf
- 5.OPERATING LIFE:10,000 Cycles

7	TERMINAL	4	PHOSPHOR BRONZE	Ag plated
6	CONTACT	1	BRASS	Ag plated
5	SPRING	1	SUS	
4	CAM STICK	1	SUS	
3	CASE	1	PPA(Black)	
2	COVER	1	PPA(Grey)	
1	KNOB	1	PPA(White)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

04/07/25

CHECKED BY:

Jacky Chen

DATE

04/07/25

APPROVED BY:

Tony Kao

DATE

04/07/25

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

PUSH SWITCH

PS-22E58L-S313

PS-22E58L-S313

SIZE

A4

VER

R