



SUA-110V8I-x-S329

COLOR :

Black : B

White : W

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:






- 1.Contact Resistance: 30 mΩ Max
- 2.Insulation Resistance: 1,000 MΩ Min
- 3.Dielectric Withstanding Voltage: 500 V DC

Material:

- 1.Housing: PBT, UL 94V-0
- 2.Contact: BRASS
- 3.Shell: SPCC

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

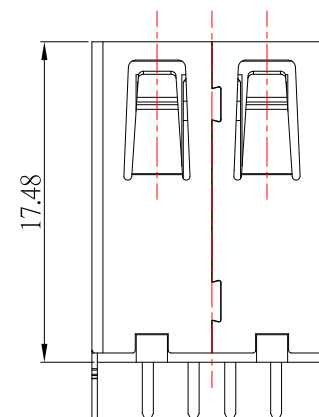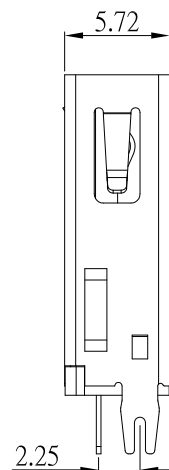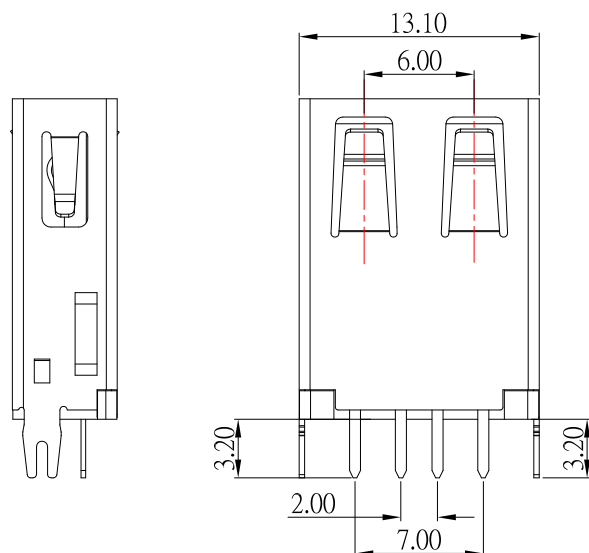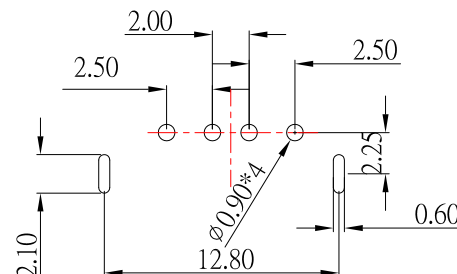

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 06/17/22

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	USB A/F 插板 無捲邊直腳 L:17.5mm
SCALE	DWG NO.	SUA-110V8I-x-S329
SHEET NO.	PART NO.	SUA-110V8I-x-S329

ITEM NO.	DESCRIPTION	DRAWN	DATE
1	更新樣式	Jack	061722