


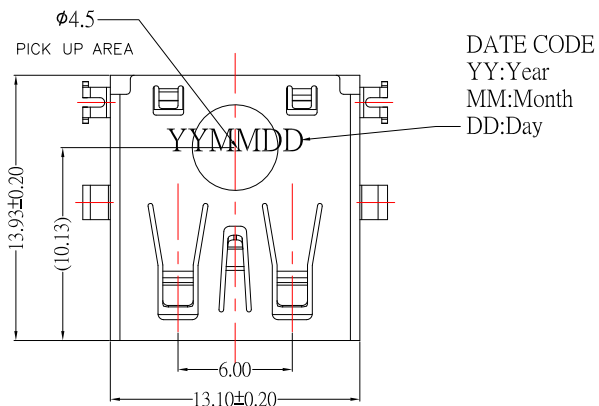

SUA-110E29x-x-S236

Shell Material :


Blank : Brass

I : SPCC

Color :

White : W

Black : B

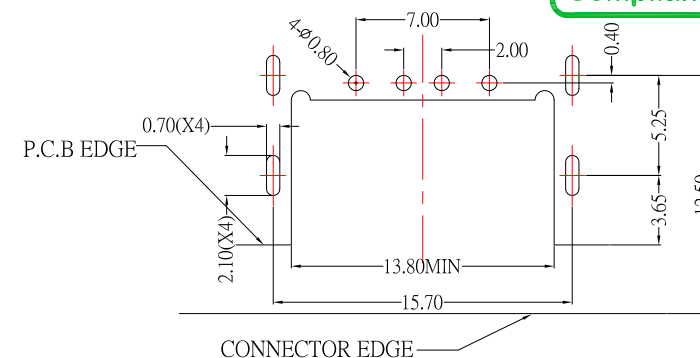

RECOMMEND P. C. B LAYOUT COMPONENT

SPECIFICATIONS

Electrical:




- 1.Voltage Current Rating: 1.8 A
- 2.Contact Resistance: 30 mΩ Max
- 3.Insulation Resistance: 100 MΩ Min
- 4.Dielectric Withstanding Voltage: 100 V AC

Material:

- 1.Housing: PBT
- 2.Contact: Copper Alloy
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

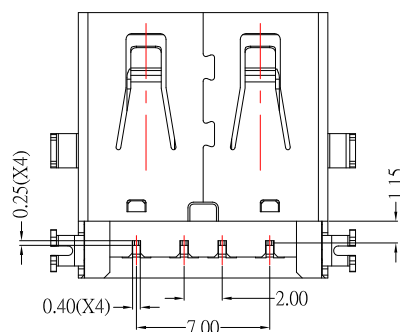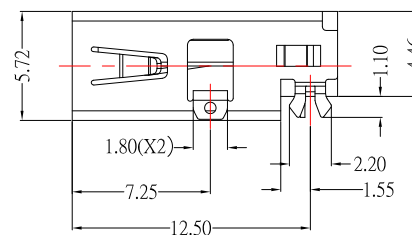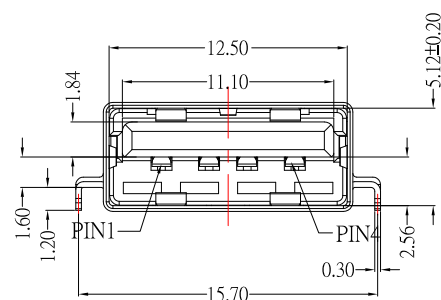

東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 12/03/20

CHECKED BY: DATE

Jacky Chen 12/03/20

APPROVED BY: DATE

Tony Kao 12/03/20

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

USB AF DIP 沉板反向 H4.46mm無捲邊

SUA-110E29x-x-S236

SUA-110E29x-x-S236

SIZE

VER

ITEM NO.

DESCRIPTION

DRAWN

DATE

A

B

C

D

E

F

G

H

I

J