








3 级插头接触点位置尺寸



5 级插头接触点位置尺寸

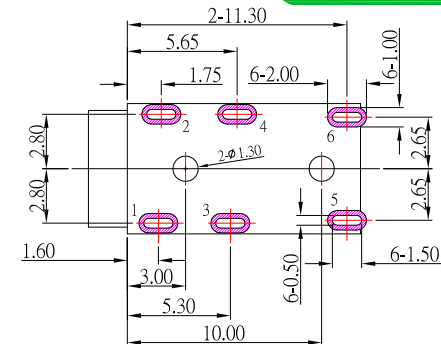

P.C.B LAYOUT

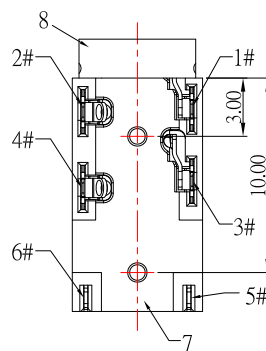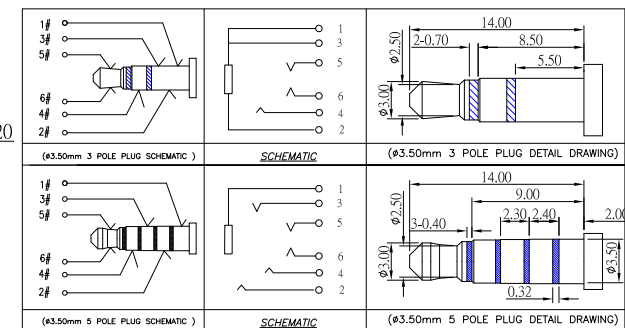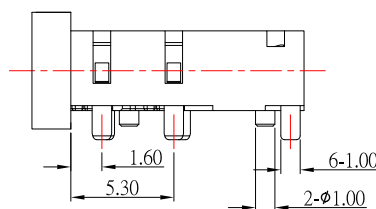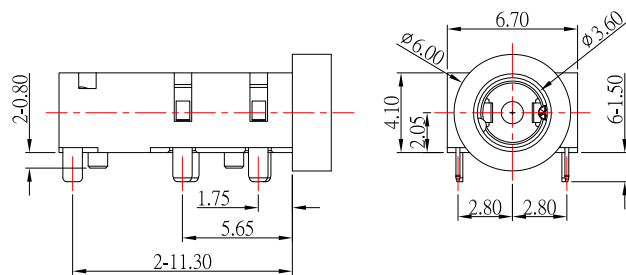

SPECIFICATION

- Rating : 1.0A ;
- Contact resistance : $\leq 100\text{m}\Omega$;
- Insulation resistance : $\geq 100\text{M}\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-30N;
- life test : 5,000 cycles °

8	METAL BUSHING		C3604,GOLD FLASH
7	HOUSING	1	PA10T,COLOR BLACK.
6	TERMINAL 6#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA
5	TERMINAL 5#	1	
4	TERMINAL 4#	1	
3	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA
2	TERMINAL 2#	1	
1	TERMINAL 1#	1	
ITEM	NAME	Q'TY	DESCRIPTION



TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	07/11/22	FINISH	MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-T53063-S214
Jacky Chen	07/11/22	1 : 1	PART NO.	PJ-T53063-S214
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	07/11/22			

1	更新材質	Jack	071122
ITEM NO.	DESCRIPTION	DRAWN	DATE