

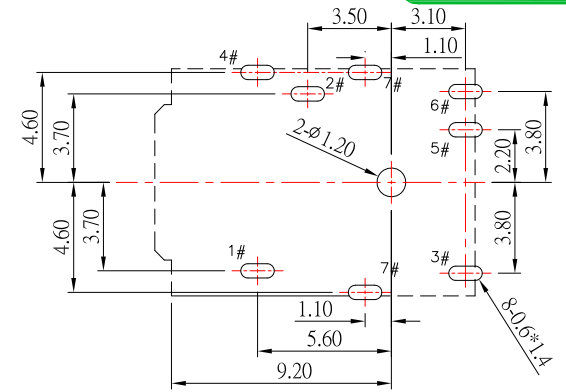

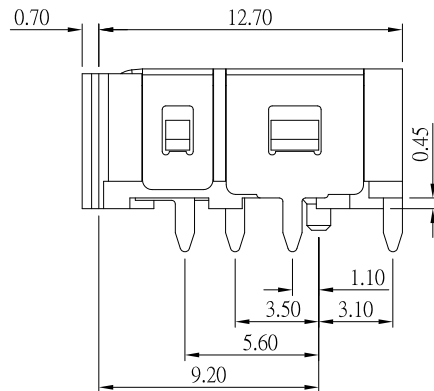
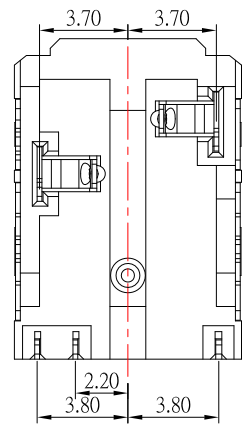



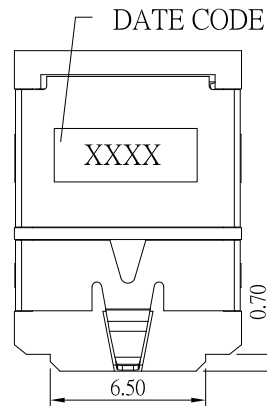

P.C.B LAYOUT
TOP VIEW

SPECIFICATION

1. Rating : DC 12V, 1.0A
2. Contact resistance : $\leq 50\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. Life test : 5,000 cycles

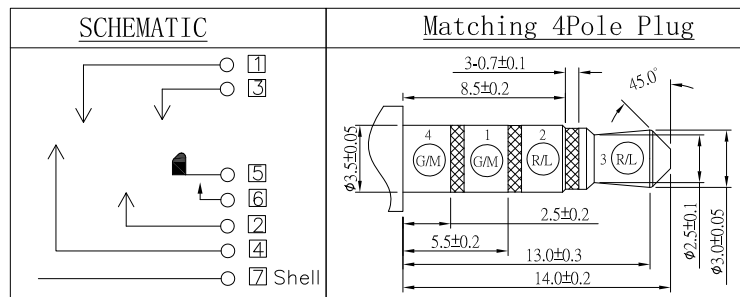

9	HOUSING	1	PA10T	Black
8	INSULATOR	1	PA10T	Black
7	SHELL	1	SUS	NI-Plating
6	TERMINAL-6	1	PHOSPHOR BRONZE	GOLD FLASH ON CONTACT AREA GOLD FLASH SOLDER AREA ALL OVER NI
5	TERMINAL-5	1	PHOSPHOR BRONZE	GOLD ON CONTACT AREA ALL OVER NI
4	TERMINAL-4	1	PHOSPHOR BRONZE	GOLD ON CONTACT AREA ALL OVER NI
3	TERMINAL-3	1	PHOSPHOR BRONZE	GOLD ON CONTACT AREA Matte Sn SOLDER AREA ALL OVER NI
2	TERMINAL-2	1	PHOSPHOR BRONZE	GOLD ON CONTACT AREA Matte Sn SOLDER AREA ALL OVER NI
1	TERMINAL-1	1	PHOSPHOR BRONZE	GOLD ON CONTACT AREA Matte Sn SOLDER AREA ALL OVER NI
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 09/18/23
DATE: 09/18/23
DATE: 09/18/23

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

JACK
3.5 PHONE JACK
PJ-D32325E-S457
PJ-D32325E-S457

SIZE
A4
VER
R