

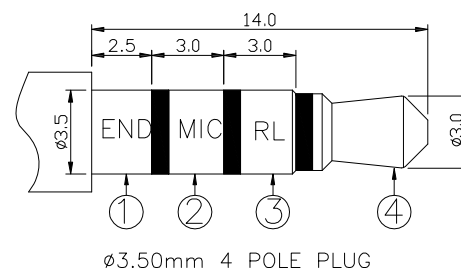
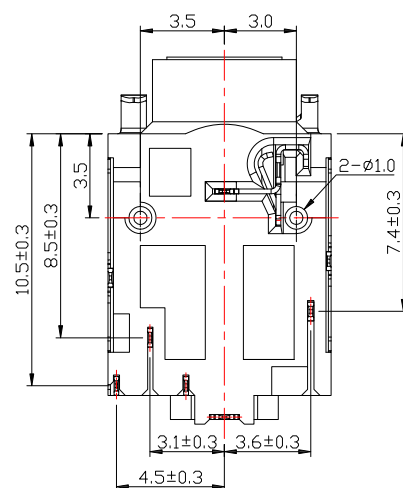


- 1.Rating : DC 30V , 1.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

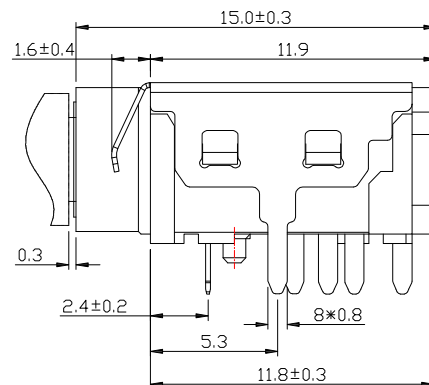

⑨	RING	1	BRASS	Ni-Plating
⑧	SHELL	1	SUS	Ni-Plating
⑦	HOUSING	1	PA9T	
⑥	CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
⑤	SPRING PIECE	1	PHOSPHOR BRONZE	Au-Plating
④	CURVE PIECE	1	PHOSPHOR BRONZE	Au-Plating
③	SPRING PIECE	1	PHOSPHOR BRONZE	Au-Plating
②	SPRING PIECE	1	PHOSPHOR BRONZE	Au-Plating
①	CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
No	PART NAME	QTY	MATERIAL	REMARK

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	08/27/21			MODLE	PHONE JACK	
CHECKED BY:	DATE	FINISH		DWG NO.	PJ-D3242K-S124	SIZE
Jacky Chen	08/27/21	SCALE	1 : 1	PART NO.	PJ-D3242K-S124	A4
APPROVED BY:	DATE	SHEET NO.	1 of 1			VER
Tony Kao	08/27/21					R

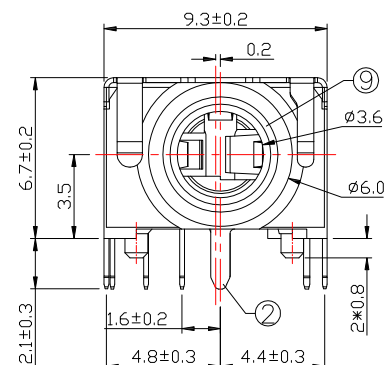

東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.
ANGEL'S



UNITS

MM

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------