


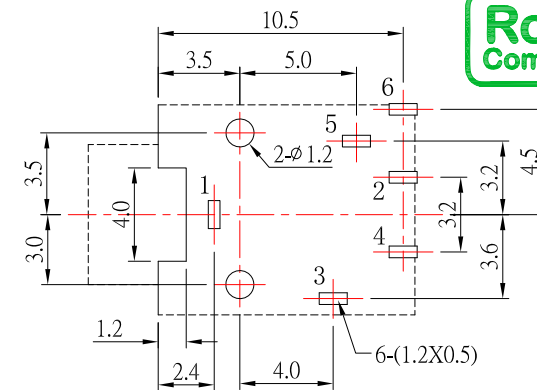
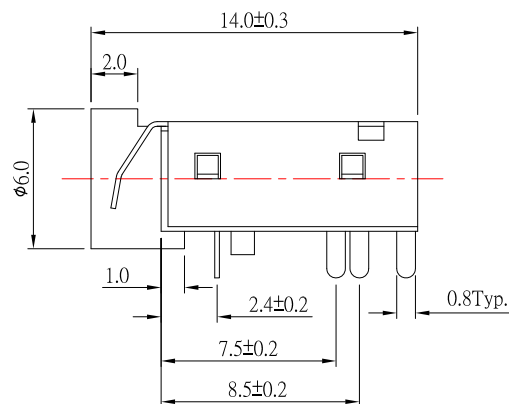


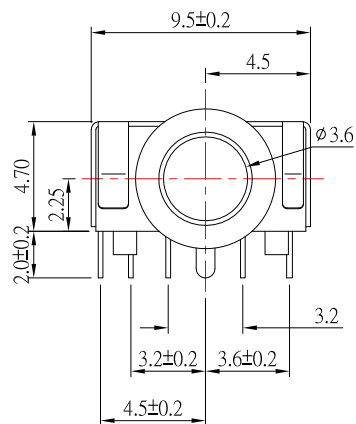


P.C.B LAYOUT
TOP VIEW

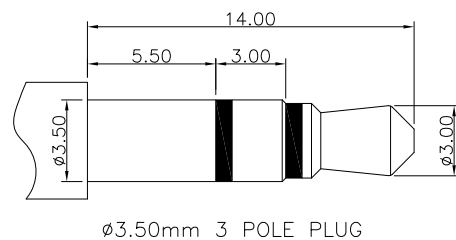

Ø3.50mm 3 POLE PLUG

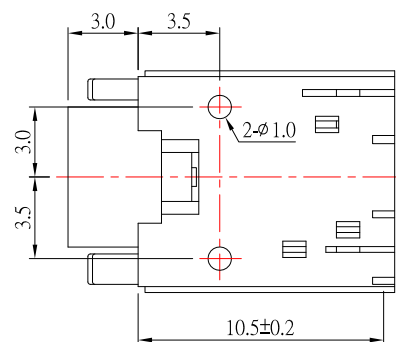


SCHEMATIC



SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

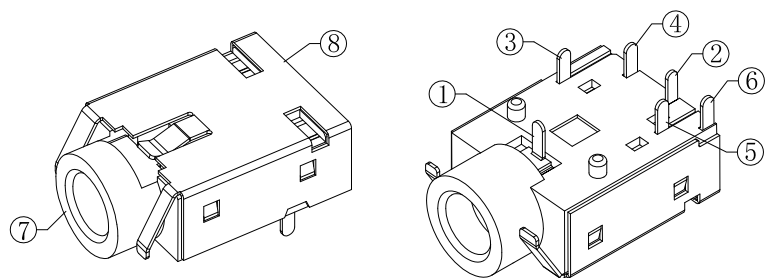

⑧	COAT	1	PHOSPHOR BRONZE	Ni-Plating
⑦	HOUSING	1	PBT	
⑥	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
⑤	SPRING PIECE	1	SUS	Ag-Plating
④	CURVE PIECE	1	BRASS	Ag-Plating
③	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
②	SPRING PIECE	1	SUS	Ag-Plating
①	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	06/18/19			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	06/18/19			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-D3043B-S124
Tony Kao	06/18/19	1 : 1	PART NO.	PJ-D3043B-S124
		SHEET NO.	1 of 1	