
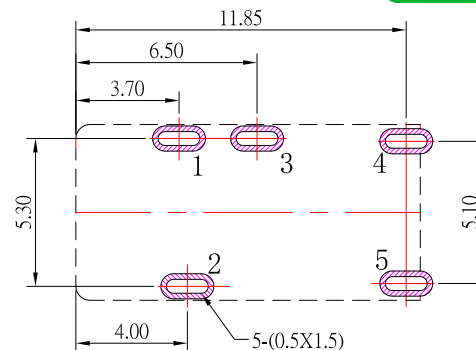
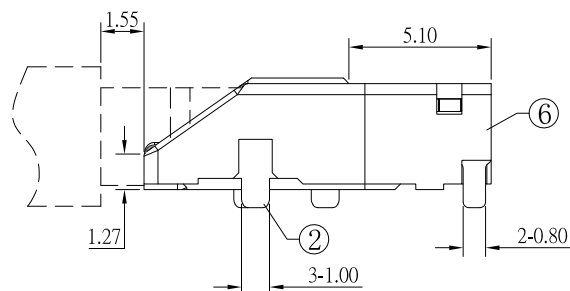
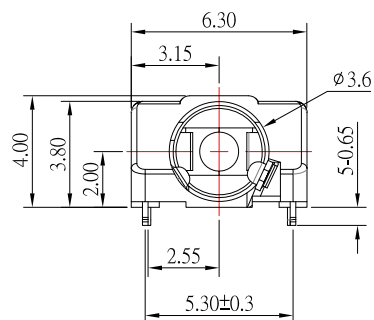




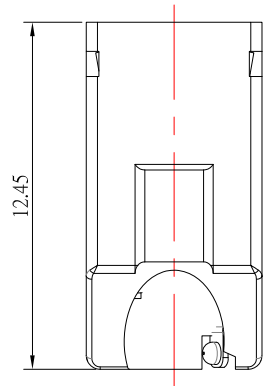


P.C.B LAYOUT TOP VIEW

SPECIFICATION

- 1.Rating : DC 30V , 1.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

SCHEMATIC

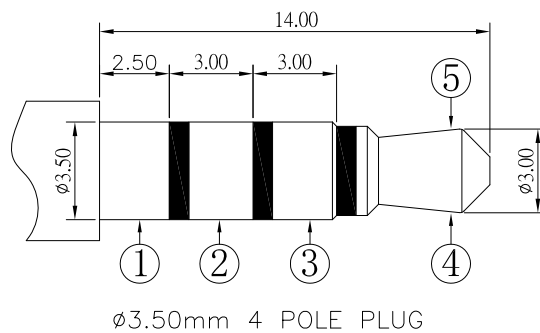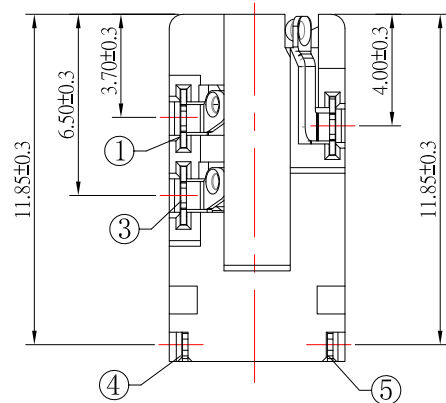

Ø3.50mm 4 POLE PLUG

⑥	HOUSING	1	PA9T	
⑤	5# CONTACT FOOT	1	SUS	Au-Plating
④	4# CONTACT FOOT	1	SUS	Au-Plating
③	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
②	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
①	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
No	PART NAME	QTY	MATERIAL	REMARK



東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	11/08/21			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	11/08/21			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-T3523-S124
Tony Kao	11/08/21	1 : 1		
		SHEET NO.	PART NO.	PJ-T3523-S124
		1 of 1		
				SIZE A4
				VER R1