

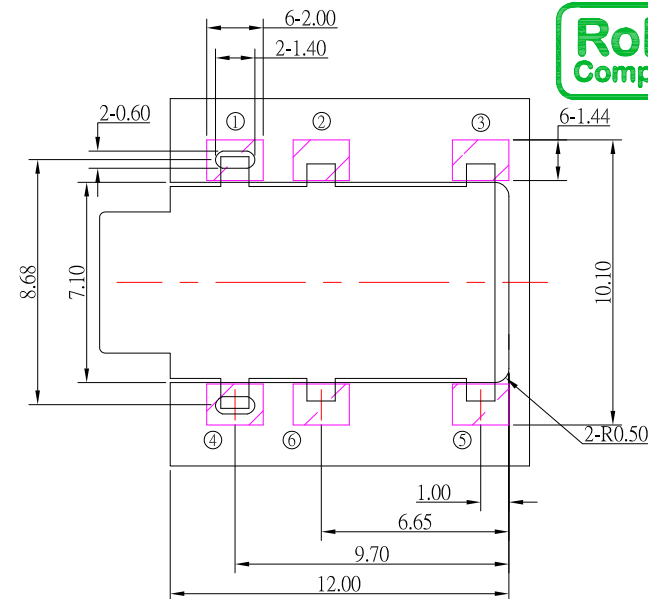
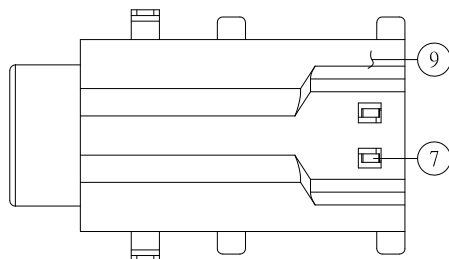
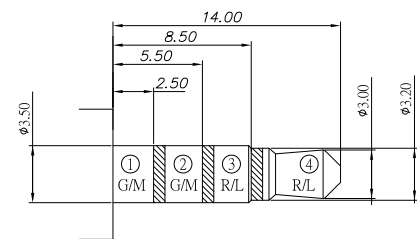
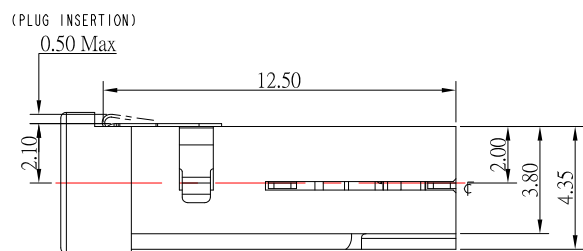
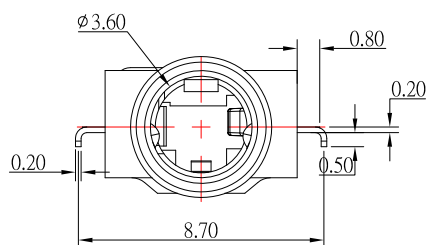


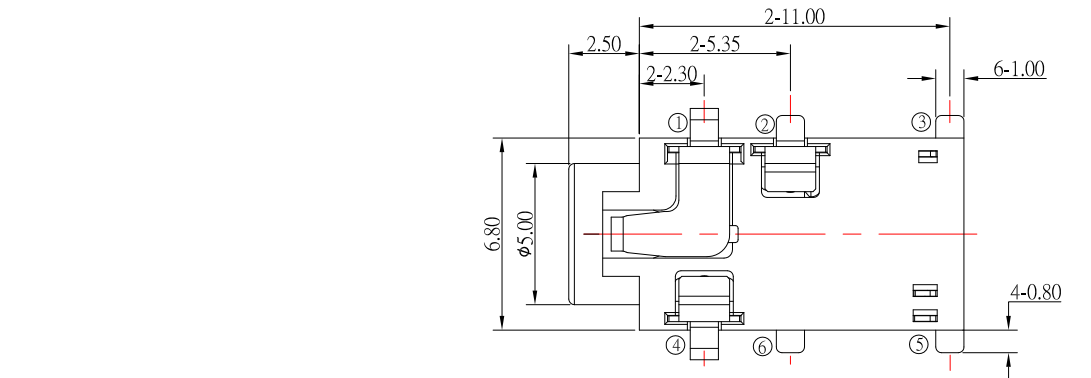

SPECIFICATION

- 1.Rating : DC 5V ,0.5A ;
- 2.Contact resistance : $\leq 70\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion force : 20N Max;
- 6.Extraction force : $12\pm 5\text{N}$;
- 7.life test : 5,000 cycles 。



9	INSERT MOLDING	1	PA9T	BLACK
8	HOUSING	1	PA9T	BLACK
7	7# CONTACT FOOT	1	STAINLESS STEEL PLATE	
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L		TITLE	JACK	
Jack Lu	12/15/22					
CHECKED BY:	DATE	FINISH		MODLE	PHONE JACK	
Jacky Chen	12/15/22					
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	PJ-S32339-S214	SIZ A4
Tony Kao	12/15/22	SHEET NO.	1 of 1	PART NO.	PJ-S32339-S214	VER R3



TOLERANCE UNLESS
OTHERWISE STATED

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	± 0.3

3RD.
ANGEL'S



UNITS

MM

3	更新材質	Jack	121522
2	更新料號	Jack	011722
1	更新圖面	Jack	111121
ITEM NO.	DESCRIPTION	DRAWN	DATE