


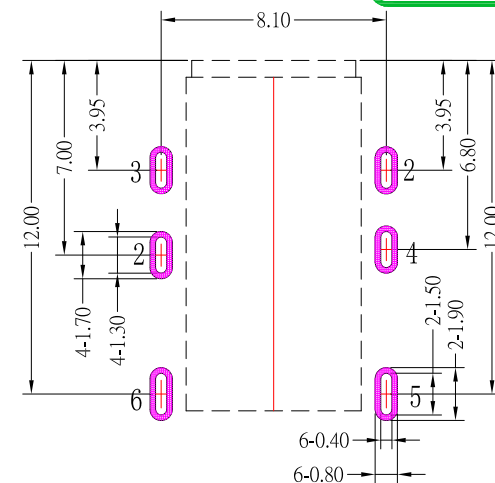
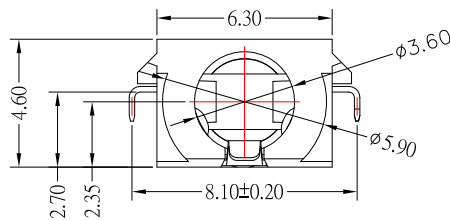
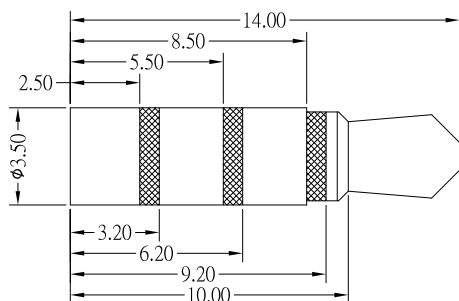
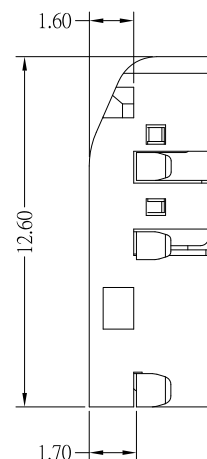


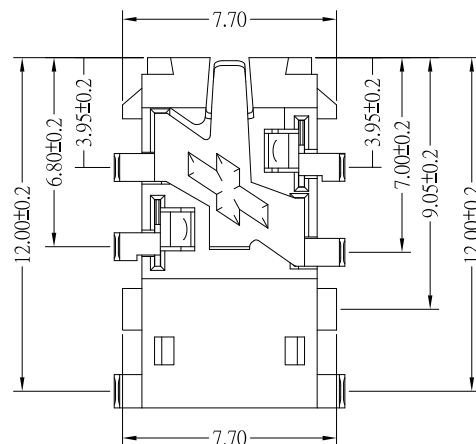

P.C.B LAYOUT
TOP VIEW

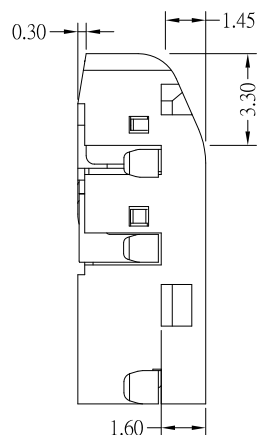

SCHEMATIC



SPECIFICATIONS

1. Rating : DC 30V , 0.5A
2. Contact resistance : $\leq 30m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles

6	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
5	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
4	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
3	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	HOUSING	1	PPA (Black)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MATL	TITLE	JACK
Jack Lu	04/25/23			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	04/25/23			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-S32304A-S457
Tony Kao	04/25/23	1 : 1		
		SHEET NO.	PART NO.	PJ-S32304A-S457

ITEM NO.	DESCRIPTION	DRAWN	DATE