
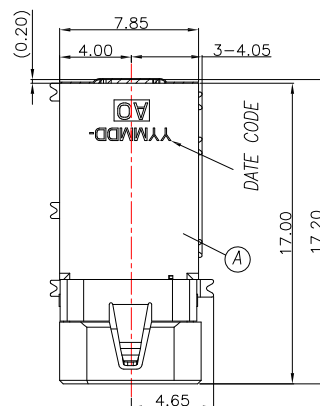




MODEL NO.	PJ-S53070-S214
SCHEMATIC	

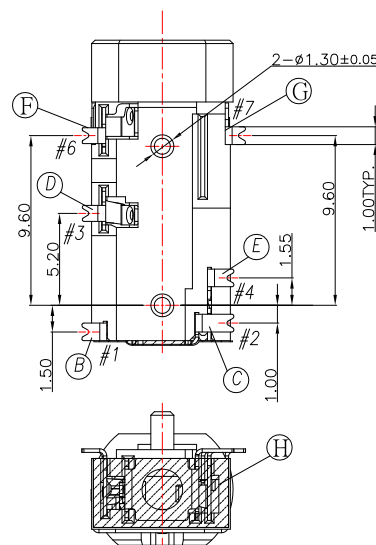

SPECIFICATION

- 1.Rating : DC 12V , 1.0A ;
- 2.Contact resistance : $\leq 50m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles .

P.C.B LAYOUT MOUNTING PATTERN (TOP VIEW)

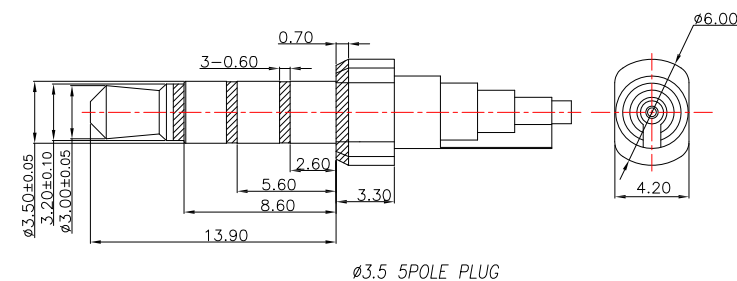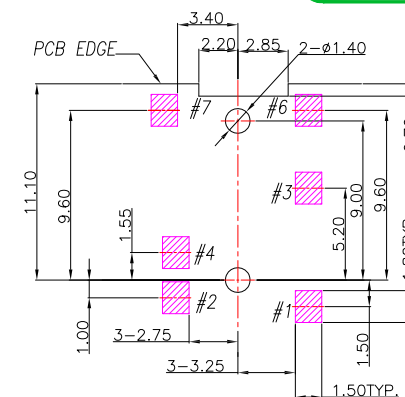

Ø3.5 5POLE PLUG

H	MYLAR	1		YELLOW
G	EARTH	1	COPPER ALLOY	GOLD FLASH ON CONTACT AREA; MATTE Sn ON SOLDER AREA; ALL OVER Ni PLATING.
F	RING-B-L	1	COPPER ALLOY	GOLD FLASH ON CONTACT AREA; GOLD FLASH ON SOLDER TAIL AREA, ALL OVER Ni PLATING.
E	RING-B-R	1	COPPER ALLOY	
D	RING-A	1	COPPER ALLOY	
C	SHUNT-A	1	COPPER ALLOY	
B	TIP	1	COPPER ALLOY	
A	BODY	1	HIGH TEMP.THERMOPLASTIC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	07/29/20			
CHECKED BY:	DATE	FINISH	MODLE	3.5 PHONE JACK 5 段式
Jacky Chen	07/29/20			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-S53070-S214
Tony Kao	07/29/20	1 : 1		
		SHEET NO.	PART NO.	PJ-S53070-S214
				SIZE A4
				VER R