
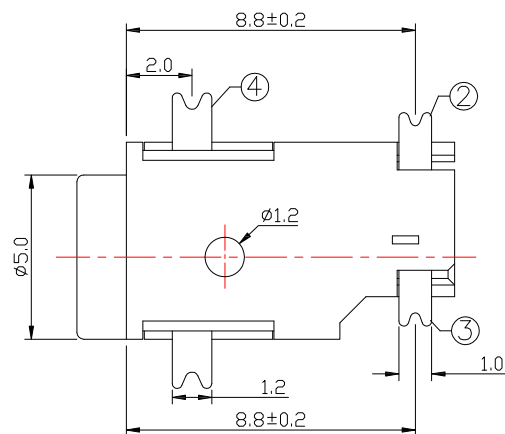

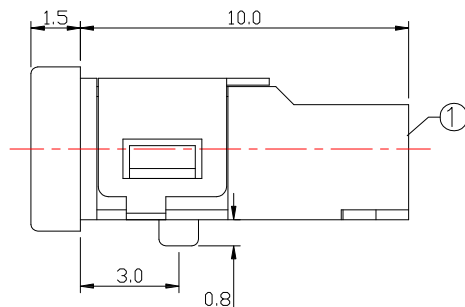
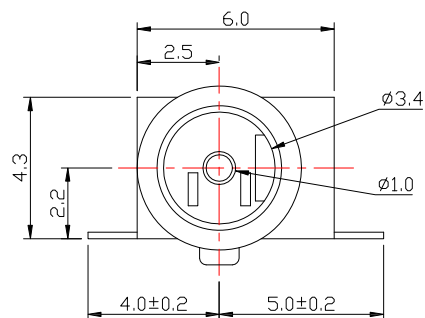

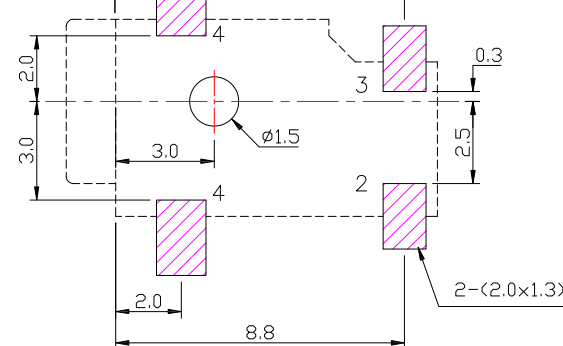


PLUG

MODEL NO.	DC-043D-1.0
SCHEMATIC	



P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

SPECIFICATION

1. Rating : DC 30V , 2.0A
2. Contact resistance : $\leq 30m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 2-20N
6. life test : 5,000 cycles

④	CONTACT FOOT	1	Phosphor Bronze	Au-Plating
③	PIN	1	Phosphor Bronze	Au-Plating
②	SPRING PIECE	1	Phosphor Bronze	Au-Plating
①	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK
DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	01/05/18	FINISH	MODLE	DC JACK
CHECKED BY:	DATE	SCALE	DWG NO.	SIZE
Jacky Chen	01/05/18	1 : 1	DC-043D-1.0-S124	A4
APPROVED BY:	DATE	SHEET NO.	PART NO.	VER
Tony Kao	01/05/18	1 of 1	DC-043D-1.0-S124	R

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD. ANGEL'S

UNITS

MM