


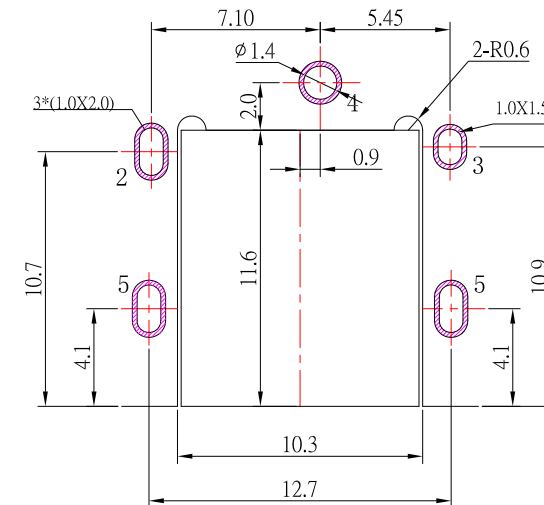
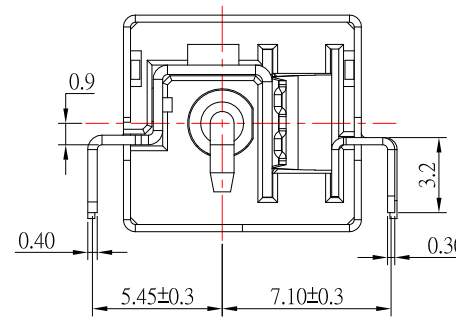
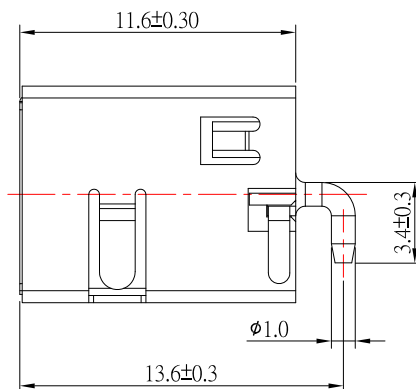
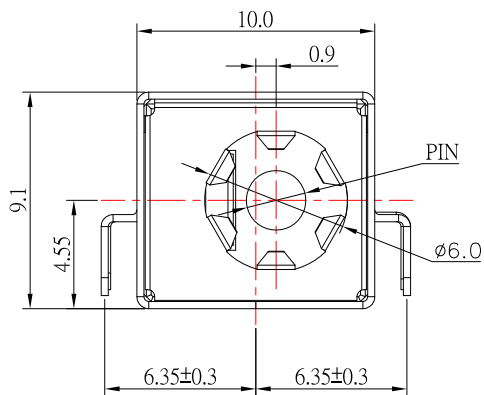
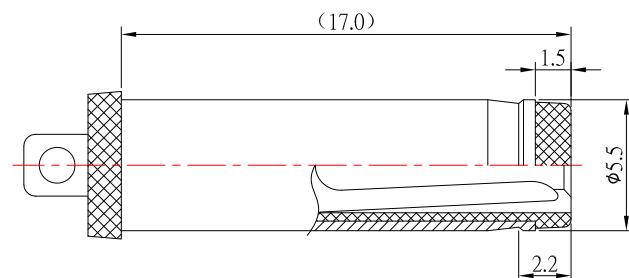


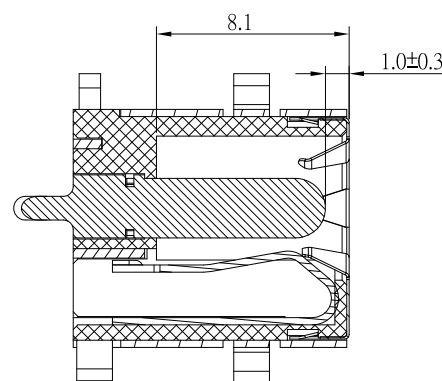


PCB LAYOUT MOUNTING PATTERN

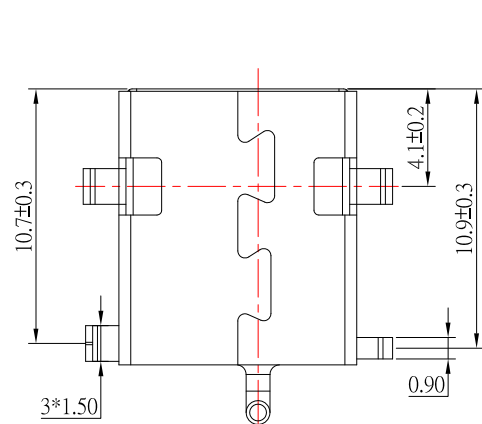

RECOMMENDED PLUG



MODEL NO.	DC-D3200A-X
SCHEMATIC	
CENTER PIN	Ø2.00mm Ø2.50mm

SPECIFICATION

- Rating : DC 20V, 5.5A
- Contact resistance : $\leq 30\text{m}\Omega$
- Insulation resistance : $\geq 100\text{M}\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 5-30N
- life test : 5,000 cycles

6	COAT	1	SUS	
5	SHELL	1	IRON	Ni-Plating
4	PIN	1	ZINC ALLOY	Ni-Plating
3	CONTACT FOOT	1	BRASS	Ag-Plating
2	SPRING PIECE	1	BRONZE	Ag-Plating
1	HOUSING	1	LCP	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	01/05/22			
CHECKED BY:	DATE	FINISH	MODLE	DC JCAK
Jacky Chen	01/05/22			
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO, DC-D3200A-x-S124
Tony Kao	01/05/22	SHEET NO.	1 of 1	PART NO, DC-D3200A-x-S124

3	更新圖面	Jack	010522
2	更新圖面	Jack	010422
1	更新材質	Jack	110821
ITEM NO	DESCRIPTION	DRAWN	DATE