


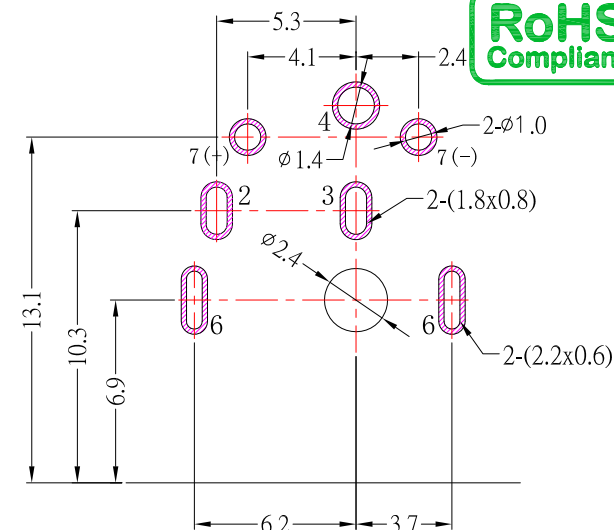
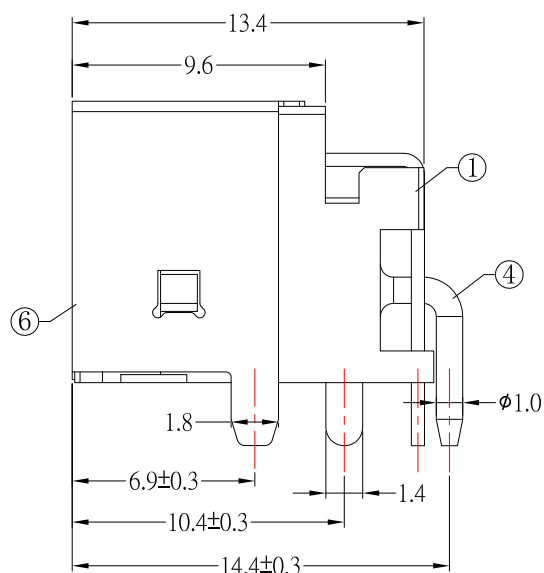


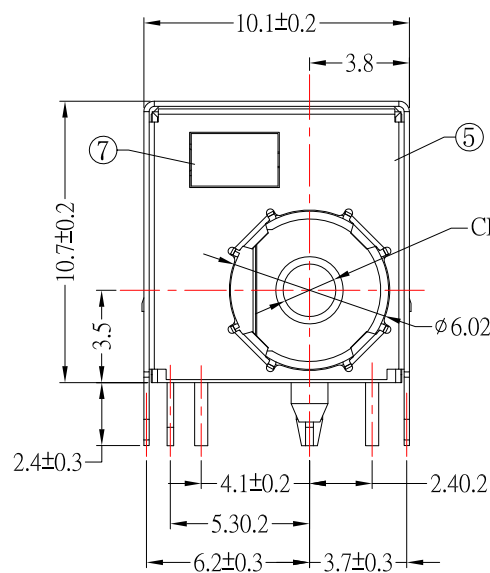

P.C.B LAYOUT
TOP VIEW

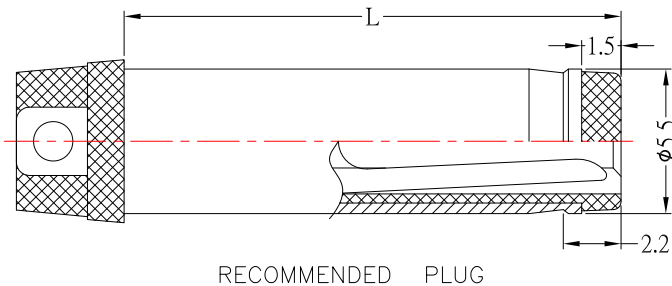

RECOMMENDED PLUG

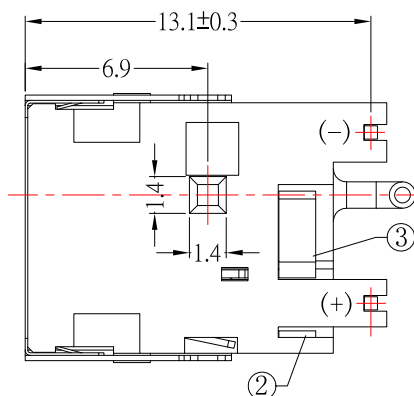

MODEL NO.	DC-D046H-x
SCHEMATIC	 GREEN 7+ — 7-
CENTER PIN(X)	Ø 2.0mm Ø 2.5mm

SPECIFICATION

- Rating : DC 30V , 5.0A ;
- Contact resistance : $\leq 30m\Omega$;
- Insulation resistance : $\geq 100M\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-30N;
- life test : 5,000 cycles °

⑦	LED(Green)	1	522nm WAVELENGTH
⑥	SHELL	1	BRASS Ni-Plating
⑤	COAT	1	SUS Ni-Plating
④	PIN	1	BRASS Sn-Plating
③	CONTACT FOOT	1	BRASS Sn-Plating
②	SPRING	1	PHOSPHOR BRONZE Sn-Plating
①	HOUSING	1	PA9T
NO.	DESCRIPTION	QTY	MATERIAL PLATING

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	11/11/21			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK
Jacky Chen	11/11/21			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
Tony Kao	11/11/21	1 : 1	DC-D046H-x-S124	A4
		SHEET NO.	PART NO.	VER
		1 of 1	DC-D046H-x-S124	R2

東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S

UNITS MM

2	新增LED接線標示	Jack	111121
1	更新料號	Jack	062121
ITEM NO.	DESCRIPTION	DRAWN	DATE