

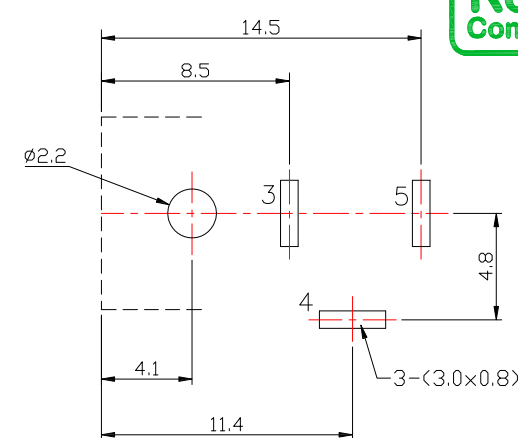
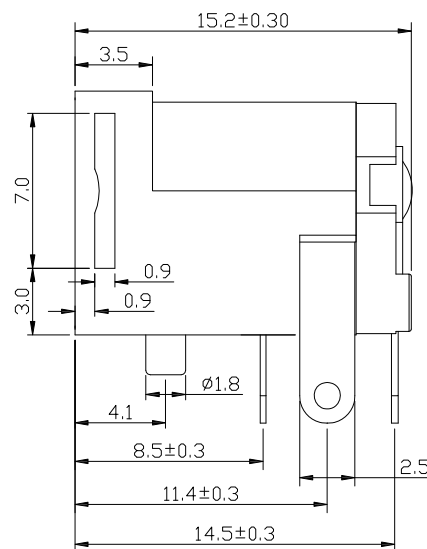
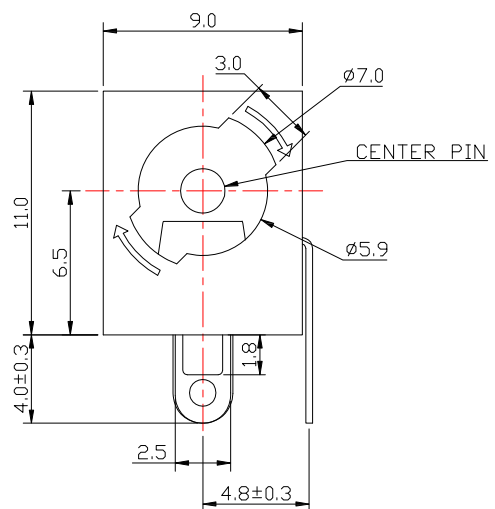


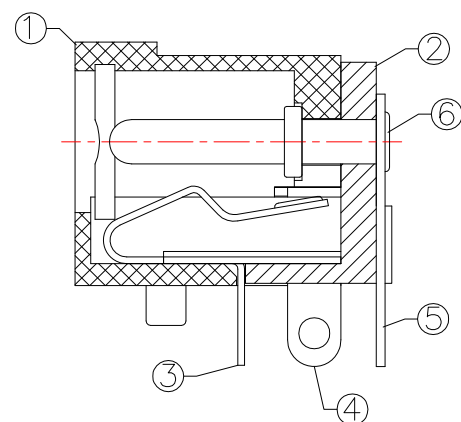

P.C.B LAYOUT
TOP VIEW

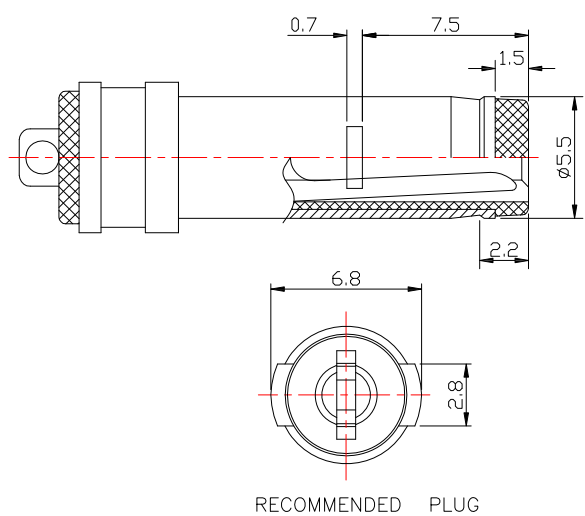

MODEL NO.	DC-062-4-x
SCHEMATIC	
CENTER PIN	$\phi 2.0\text{mm}$
	$\phi 2.5\text{mm}$

SPECIFICATION

- 1.Rating : DC 30V , 3.0A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

⑥	PIN	1	BRASS	Ni-Plating			
⑤	FLAT FOOT	1	BRASS	Sn-Plating			
④	CURVE PIECE	1	BRASS	Sn-Plating			
③	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating			
②	COVER	1	PBT				
①	HOUSING	1	PBT				
NO.	DESCRIPTION	QTY	MATERIAL	PLATING			
DRAWN BY: DATE		MAT'L	TITLE	JACK			
Jack Lu	06/01/21						
CHECKED BY: DATE		FINISH	MODLE	DC JACK 帶鎖			
Jacky Chen	06/01/21						
APPROVED BY: DATE		SCALE	1 : 1	DWG NO.	DC-062-4-x-S124	SIZE	
Tony Kao	06/01/21					SHEET NO.	1 of 1
							VER
							R

 東莞市高迪電子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle	±0.2 ±0.3 ±0.4 ±0.5 ±0.3	3RD. ANGEL'S		UNITS	MM
-------------------------------------	--	--------------------------------------	--------------	--	-------	----