


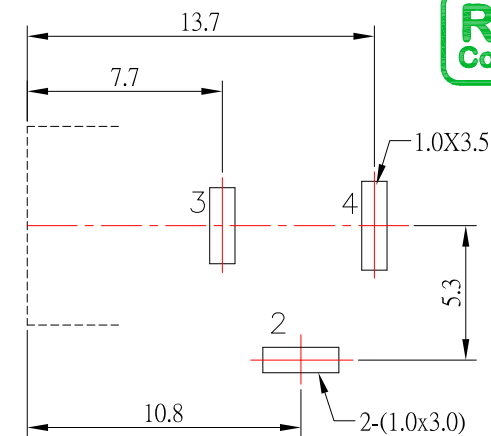
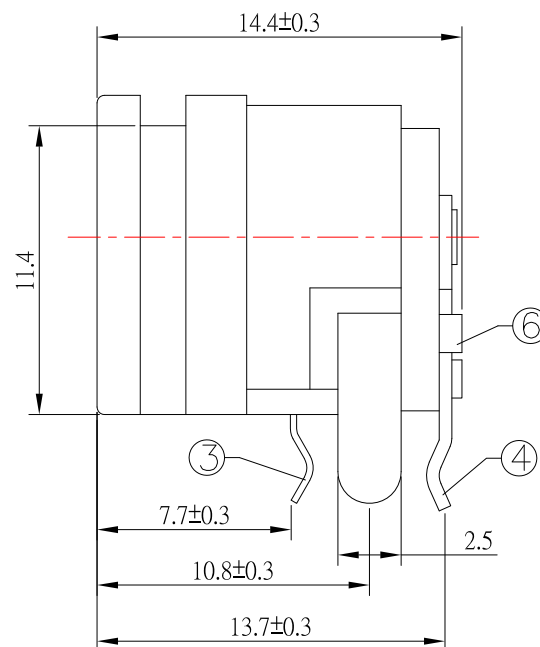


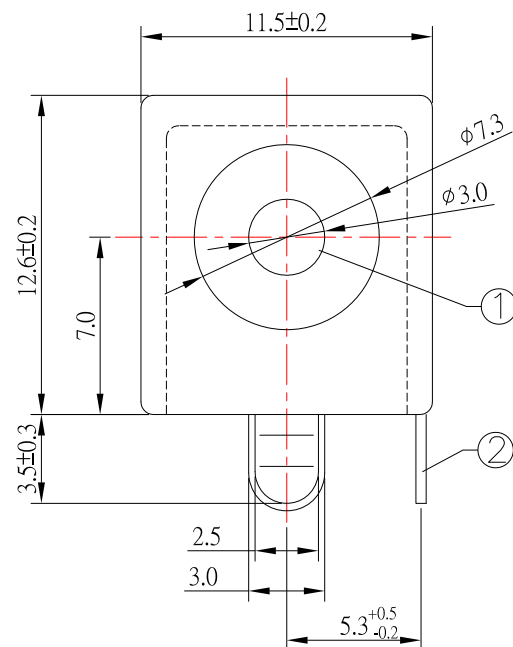


P.C.B LAYOUT MOUNTING PATTERN
(TOP-VIEW)

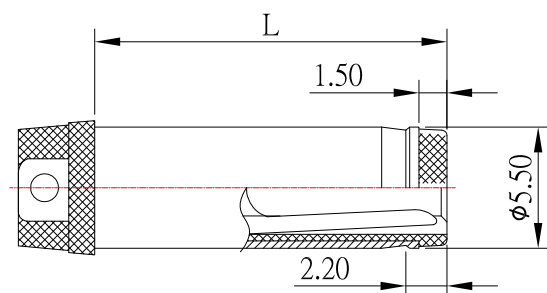

RECOMMENDED PLUG

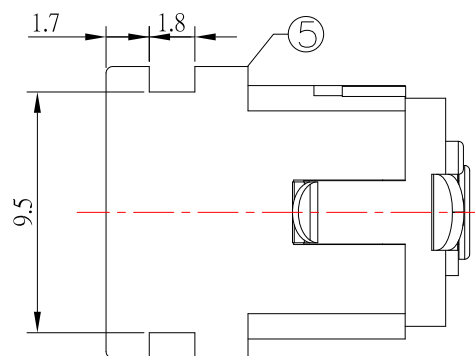

MODEL NO.	DC-040AH-2-3.0
SCHEMATIC	

SPECIFICATION

- 1.Rating : DC 30V, 4.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

6	COVER	1	PA9T	
5	HOUSING	1	PA9T	
4	FLAT PIECE	1	BRASS	Sn-Plating
3	SPRING	1	PHOSPHOR BRONZE	Sn-Plating
2	CURVE PIECE	1	BRASS	Sn-Plating
1	PIN	1	BRASS	Ni-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

 东莞市高迪电子有限公司
DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	05/31/21			
CHECKED BY:	DATE	FINISH	MODLE	DC JACK(高温料)
Jacky Chen	05/31/21			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-040AH-2-3.0-S124
Tony Kao	05/31/21	1 : 1		
		SHEET NO.	PART NO.	DC-040AH-2-3.0-S124

1	更新尺寸公差	Jack	053121
ITEM NO.	DESCRIPTION	DRAWN	DATE